

SHELVING WITH

Item no. 2

Shelving with removable shelves

(cross member + polyethylene)



3 depths :
400, 500 and 560 mm (GN).

12 lengths :
608, 708, 808, 910, 1010,
1110, 1210, 1312, 1412,
1512, 1612, 1714 mm.

2 types of shelves :
high density polyethylene or
anodised Duralinox.




line mounting

UPRIGHTS

2 heights :
1750 mm with 3, 4 or 5
levels

2050 mm with 4, 5 or 6
levels



EASY ASSEMBLY (12 lengths)



690 mm	1292 mm
790 mm	1394 mm
890 mm	1494 mm
992 mm	1594 mm
1092 mm	1694 mm
1192 mm	1796 mm



with removable aluminium
shelves




width GN 1/1

COMBINATIONS



1628 mm	2936 mm	4278 mm
1728 mm	3136 mm	4378 mm
1830 mm	3172 mm	4478 mm
1932 mm	3236 mm	4578 mm
2032 mm	3272 mm	4612 mm
2132 mm	3336 mm	4678 mm
2232 mm	3372 mm	4712 mm
2334 mm	3438 mm	4778 mm
2432 mm	3472 mm	4814 mm
2532 mm	3540 mm	4878 mm
2634 mm	3572 mm	4914 mm
2736 mm	3674 mm	4978 mm
2834 mm	3772 mm	5016 mm
	3812 mm	5080 mm
	3912 mm	5158 mm
	3976 mm	5182 mm
	4078 mm	5218 mm
	4178 mm	5284 mm

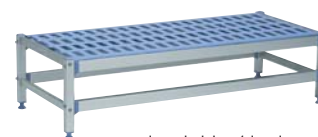

low shelving 1 level

low shelving one level - 2 low uprights
+ 1 polyethylene shelfgrid




- maximum load :
200 kg


Tournus shelving complies with all requirements :

- easy assembly
- stable
- hygienic
- modularity


The shelving is suitable for cold rooms and stores

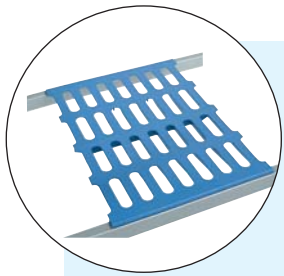


removable polyethylene shelves

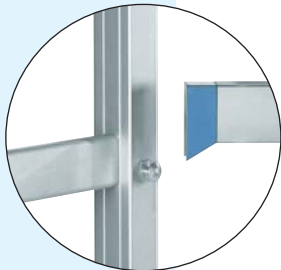


assembly without tools

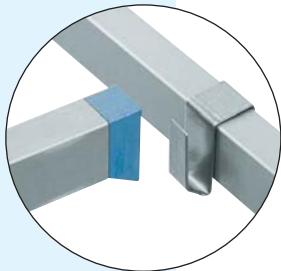

Angle mounting

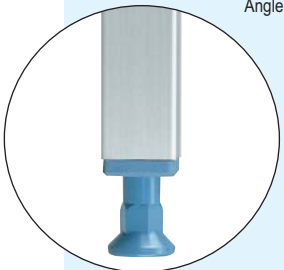

adjustable feet

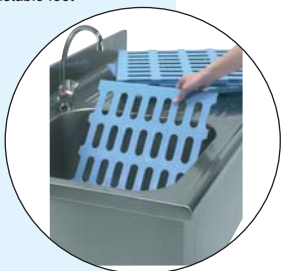

machine washable

SHELVING WITH REMOVABLE SHELVES


- **Easy assembly** : one person can assemble 5 metres in 5 minutes, no tools required.


- **Rigid structures** : tapered self locking fittings.

- **Robustness and longevity** : due to the choice of materials : high density polyethelene, anodised aluminium .
 Tubular upright 32 x 30 mm thick with adjustable feet, tubular side members 25 x 42 mm .
 Temperature resistance between - 30°C and + 60°C.
 Removable shelves machine washable up to 90° .
 Max load capacity per shelf, 50 kg, 120 kg for the 2 long lengths .

- **Modularity** : line mounted or corner mounted.
 12 base lengths.

Height 1750 mm or 2050 mm on which are premounted 3, 4, 5 or 6 fixing points which determine the shelf levels as per table below.

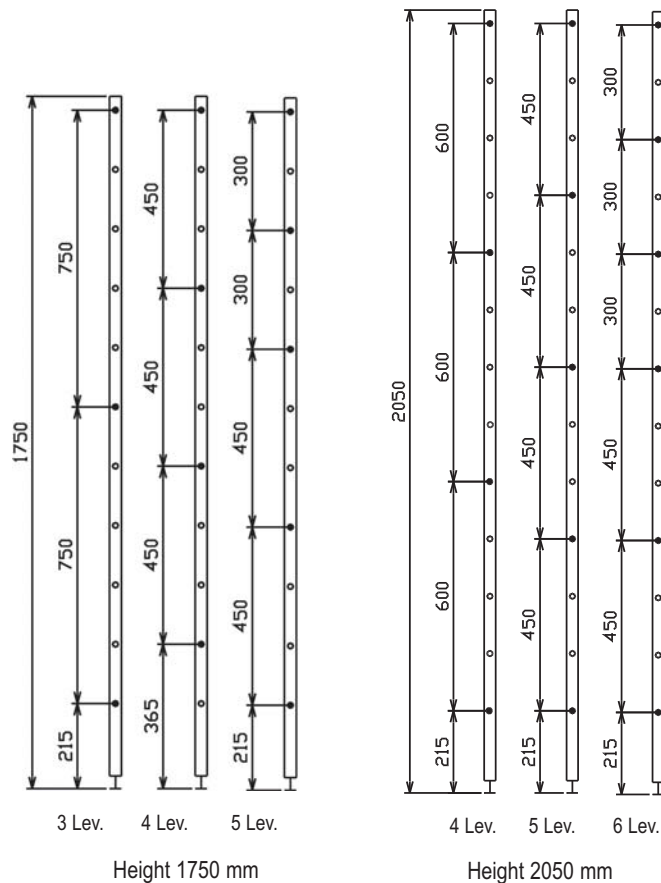

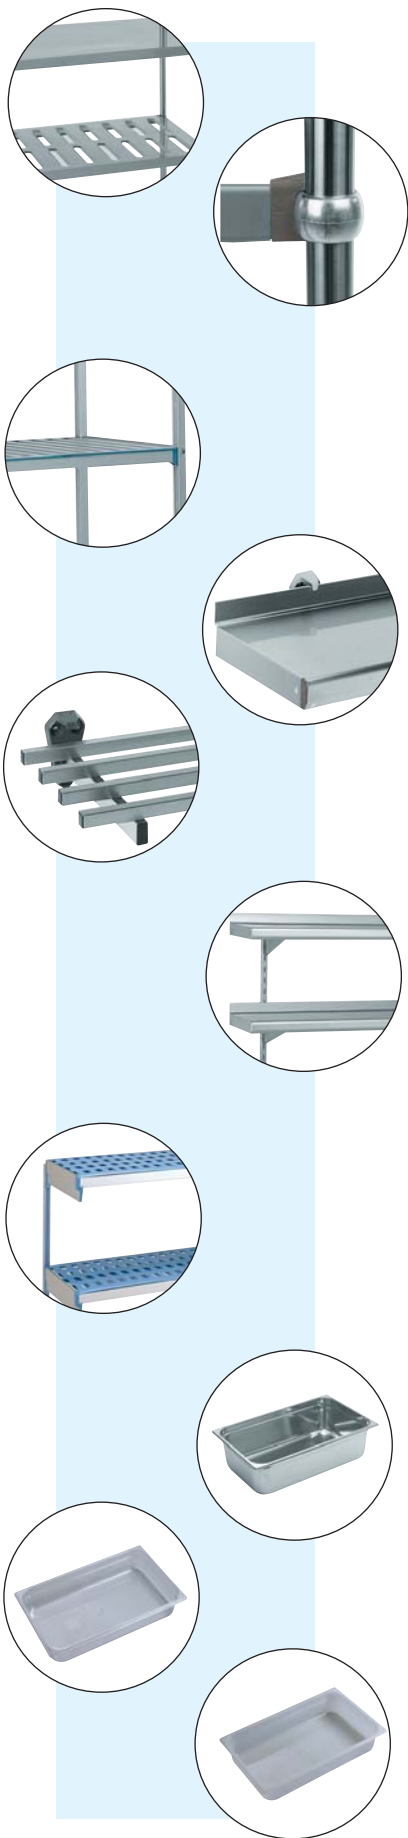

SHELVING

- Two versions : stainless steel 18-10 or duralinox alloy.
- Uprights Ø 32 mm, height 1780 mm with shelf markers every 20 cm and adjustable feet.
- Solid or perforated shelves equipped with locking collars allowing multi-positioning on the uprights.
- Maxi load : 200 kg per level.

RACKING UNITS

- Stainless steel welded construction, with/without wheels (4 levels) or with removable grids in anodised Duralinox construction (3 or 4 levels).

SINGLE LEVEL WALL SHELVING

- **1 level** with 2 brackets for wall mounting.
- 2 models : stainless steel with 40 mm upstand or 4 welded bars.
- Mounted 40 mm from wall.

RAIL WALL SHELVING

- Stainless steel shelves with rear upstand of 40 mm .
- Rails with 55 mm pitch, 315 mm height for one level, 700 mm for 2 levels and 1470 mm for 3 or 4 levels.

WALL SHELVES WITH POLYETHYLENE RACKS

- Polyethylene racks + frame sitting on 2 sliding supports mounted on 2 wall rails.
- Number of levels : 3, 4 or 5 depending on the length of the rails i.e. : 980, 1470 and 1960 mm.

GN PANS

- 3 ranges :
 - * **stainless steel pans** (refrigeration, transport, cooking, distribution),
 - * **polycarbonate pans** (preparation, storage, transport, presentation), working temperature: - 40°C to + 99°C.
 - * **polypropylene** pans (preparation, storage, freezing), working temperature : - 40°C to + 70°C.

All the pans comply with EN 631.1 standard

- All polycarbonate pans and polypropylene pans have scale marks for capacity measurement.
- Depth : from 20 to 200 mm.



Most of our product are available ex-stock within 48 hours.



A large number of products have the N-F hygiène alimentaire seal label. They are marked with this logo.

TOURNUS
EQUIPEMENT

TOURNUS EQUIPEMENT

25 avenue Jean Moulin - BP 59 - 71700 TOURNUS - FRANCE

Tel : + 33 3 85 27 42 65 - Fax : + 33 3 85 27 42 60

E-mail : export@tournus.com - Site web : www.tournus.com