


specifications

PG21.UPR.2.SD

ProSpec Series, 2 Door (Solid), Upright Fridge

Project: _____

Item No: _____

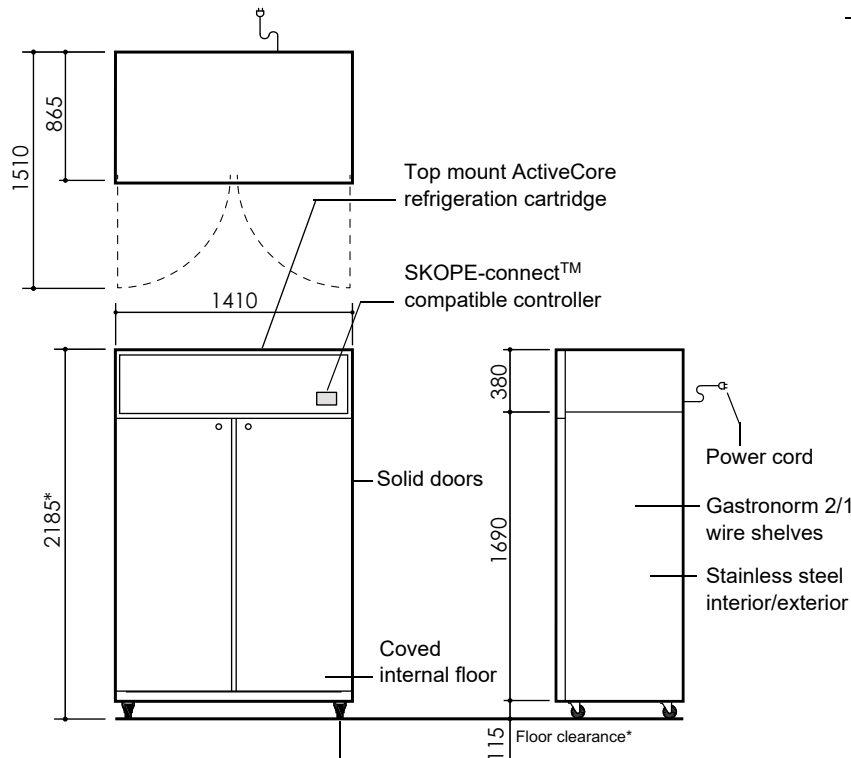

Supplied with removable height adjustable castors (Ø75mm wheel). Optional height adjustable legs available.

CABINET	
Doors	2 × self-closing, lockable, solid swing doors with stay-open position at over 90°
Internal door opening	2 × door openings: 1500mm high × 540mm wide
Shelves	10 × stainless steel GN 2/1 shelves: 530mm wide × 650mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior on all faces
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	5M1
GEMS energy consumption	3.91 kWh/24h
GEMS annual running cost	\$428 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior lighting	2 × 1400mm, 16W LED light (door activated)
Power cord	Supplied with 2.3m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	3.0 Amps (unit 2.6 Amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable ActiveCore refrigeration unit (part number UTHCNI-0010)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	165 Watts/225 Watts
Drainage	No plumbing required

DIMENSIONS		
Height	External 2185mm*	Internal 1500mm
Width	1410mm	1250mm
Depth	865mm	675mm
Floor area	1.21m ²	
Weight	230kg	
Gross volume	1,266L	
Net volume	960L	

* With supplied castors fitted. See height variation below

Height variation	
Supplied castors	2185-2200mm
Optional height adjustable legs	2220-2250mm
No castors	2070mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0596 Rev. 1.2 Mar. 2021

