

Precision Under Broiler Counters are designed to provide refrigerated storage, in an easy pull-out drawer format, under the chargrill or griddle within the cooking line. This reduces non productive time and congestion within the kitchen giving staff refrigerated storage exactly where it's needed.

Proudly made in the UK, these robust counters are capable of meeting the highest demands of commercial kitchens all around the world.

## **Key Features:**

Stainless Steel Interior & Exterior

Front Breathing & Rear Venting Refrigeration System Designed To Operate In 43°C Ambient

GN 1/1 and/or GN 2/1 Drawer System

Centrally Positioned Evaporator Between Drawers

R134a Refrigerant

Zero ODP Injected Polyurethane Insulation - 60mm

1 / 4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Off Cycle Defrost

Heat Resistant Worktop Designed To Carry Up To 150kg (Evenly Spread)

Rifle Bore Coated Evaporators

Integrated Flush Door Handle

Gastronorm Sized Drawers

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Heavy Duty Brake & Swivel Castors

Waste Heat Recovery Condensate Vaporiser System



Centrally Positioned Evaporator Place Between Drawer Sets For Even Internal Temperature Distribution

## **Options:**

Single Deep Drawer In Place Of Bank Of 2 Drawers


**Drawer Locks** 

ST/ST Back

## Notes:

Ventilation At Rear Required When Plinth Mounted



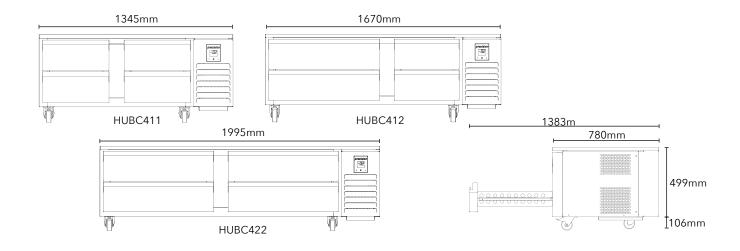

Model	HUBC411	HUBC412	HUBC422
Туре	Refrigerator	Refrigerator	Refrigerator
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Drawer Size	4 x GN1/1	2 x GN1/1 + 2 x GN2/1	4 x GN2/1
Maximum Pan Depth	100mm	100mm	100mm
Max Number of Shelves	N/A	N/A	N/A
Temperature Range	1 / 4°C	1 / 4°C	1 / 4°C
Exterior WxDxH (mm)	1345×780×605	1670x780x605	1995x780x605
Net Usable Volume (litres)	74	109	144
Weight (KG)	110	140	170
Refrigerant / GWP	R134a / 1430	R134a / 1430	R134a / 1430
Refrigeration Watts (+45°C Condensing)	412	412	412
Evaporating Temp	-10°C	-10°C	-10°C
Heat Rejection Watts	618	618	618
Noise Output (dBa)	62	62	62
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.9	1.9	1.9
Energy Consumption / 24hrs - kWh*	2.29	3.48	4.35
Energy Consumption / Year (AEC) - kWh*	836	1270	1588
Energy Efficiency Class*	С	D	D
*Tested to EN16825 Climate Test Class 4 - M1 Classification Test for Refrigerators / L1 Classification Test for Freezers			

\*Tested to EN16825 Climate Test Class 4 - M1 Classification Test for Refrigerators / L1 Classification Test for Freezers

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet