

Proudly made in the UK, Precision's durable all stainless steel Gastronorm mobile banquet carts have been designed to provide energy efficient and reliable mobile refrigerated and heated storage solutions for commercial kitchens all around the world.

The refrigerator model is designed to operate between -2°C and $+4^{\circ}\text{C}$ offering incredible flexibility and the ability to store 24 x GN1/1 65mm deep pans of refrigerated product. It's bottom mounted 43°C high ambient refrigeration system - managed by Precision's iCool energy saving controller - provides accurate temperature control and peace of mind. Audio visual temperature alarms come as standard, along with HACCP capability.

The heated model operates between 78°C and 82°C to provide storage of 30 x GN1/1 65mm deep pans of pre-cooked food product. A humidity tray is also fitted as standard to increase the humidity within the cabinet when required.

Both models are supplied with pan/tray slides only and have 60mm of polyurethane insulation helping to maintain internal temperatures for extended periods even after being switched off.

Precision's mobile banquet carts are mounted on heavy duty swivel and brake castors with flush pull handles for easy mobility and stability. All round bumper bars ensure protection and a helicoil power cable makes sure the power cord is out of the way during transportation.



PMR 24



PMH 30

Thoughtful Design Features

These include: Extra thick door insulation providing extra strength and thermal properties, as well as protecting the door gasket whilst loading pans/shelves. Low external height dimension allow the cabinet to easily fit through standard door openings.

Gastronorm Shelving


Lockable self-closing doors, with removable magnetic balloon type gaskets provide access to a Gastronorm shelving system. Gastronorm pans, shelves and trays are supported on removable anti-tilt stainless steel slides and ladder racking.

Options:

- GN Shelves
- GN Pans
- Hydrocarbon Refrigerant
- HFO Refrigerant

General Specifications

Stainless steel interior & exterior
 High ambient 43°C refrigeration system
 Ultra low energy consumption
 Zero ODP injected polyurethane insulation
 -2 / +4°C refrigerator temperature
 Electronic controller with large LCD screen
 Electric defrost - refrigerator
 Coated evaporator and vaporiser coil
 Safety cut out switch - heated
 Integrated flush door handle
 Gastronorm shelving system with anti-tilt slides
 Lockable self closing doors
 Heavy duty brake & swivel castors
 Protective bumper bars

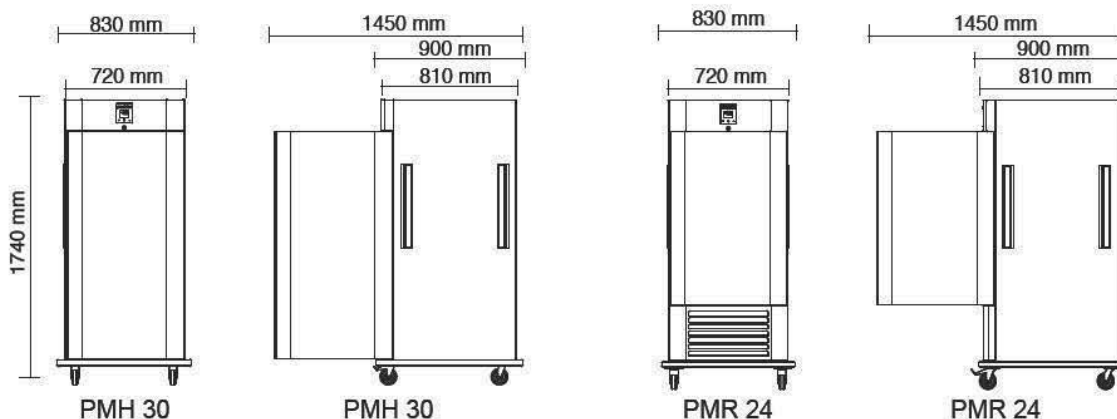

Technical Data

model	temp	capacity (GN 1/1)	w (mm)	d (mm)	h (mm)	gas	slides (pairs)	cap. watts	evap @	power	amps	kWh/24 hr (EN153)	weight (kg)
-------	------	----------------------	-----------	-----------	-----------	-----	-------------------	---------------	--------	-------	------	----------------------	----------------

Mobile Banquet Carts

PMR 24	-2 / 4°C	24	830	900	1740	R134A	12	460	-10° C	240 / 50 / 1	2.5	1.1	155
PMH 30	78 / 82°C	30	830	900	1740	NA	15	2.2kW	NA	240 / 50 / 1	9.5	11.2	135

Notes:

Cabinets supplied with pan / tray slides only