


Vianen stainless steel Fecon filters extract grease and particles from the air by means of the cyclone principle.



Captured grease runs off the filters into an integrated collection gutter and into easily removable grease tray(s).

S/S Mounting brackets for easy installation

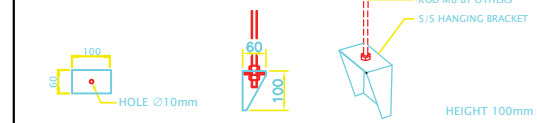

Pos. 3: S/S Misty Unit, model 3000

Material: 304 stainless steel – 320 grit brushed finish
 Dimensions: LxWxH 1450x2025x600mm (1 part)
 Exhaust flow rate : 3000 m³/h. (250 Pa)
 Advised additional supply flow rate (by others) : 2700 m³/h.

Canopy fitted with:

- 4 nos. S/S Fecon S filter WxH = 500x500x50mm (Filters NSF/UL/TNO certified)
- 1 nos. 1" Drain
- 1 nos. Internal moisture separator
- 1 nos. Electric Water valve 10W/240V~50Hz 3/4" Connection
- 1 nos. Removable inspection panel with lockable closures
- 1 nos. Inlet side 1300x350mm (@ \pm 1 m/s)
- 1 nos. Outlet side + Flange 695x395mm (@ \pm 3 m/s)

SPECIFICATIONS:

CONTINUES WATER PRESSURE 2,0 bar
 WATER CONSUMPTION MISTY 0.967 Liter/Minute/Nozzle (@2 bar)

COMMENT: ALL WATER, DRAINAGE & ELECTRIC PIPING DELIVERED AND INSTALLED BY OTHERS.

SAFETY PROTECTION SYSTEM FOR WATER DELIVERED AND INSTALLED BY OTHERS

ALL SERVICES REGARDING WATER, DRAINAGE & ELECTRIC PIPING ARE THE TENANT'S RESPONSIBILITY