



6218

SOFT SERVE FREEZER

Single flavor, Countertop, Gravity feed

Most **Compact & Versatile**
Classy design that offers quality
and simplicity

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Overrun & Consistency Control

Simple and easy control of viscosity and overrun to ensure product consistency

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Ideal for any business to add ice cream, frozen yogurt, gelato or sorbet to enhance menu and dessert options. Easy addition to restaurants, bars, kitchens, convenience stores and delis.



Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight


Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



6218

SOFT SERVE FREEZER

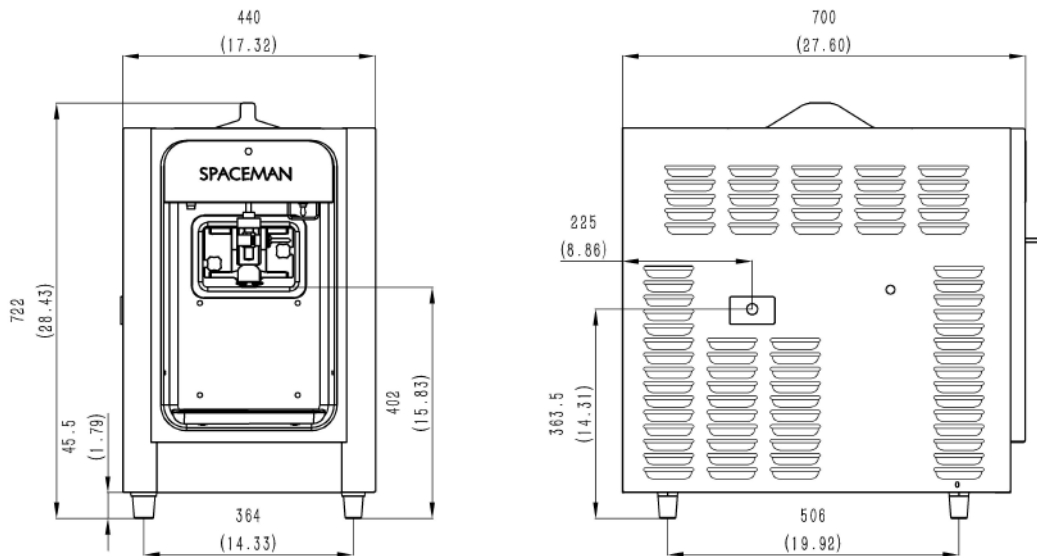

SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 1.7L / 1.8qt
Mix Hoppers	1 x 8.0L / 8.5qt
Output Capacity (80 grams)	200 serves/hr
Clearance Requirements	152mm/6" on right

Weight Kg/lb (Gravity)

Net	101 / 225
Shipping	113 / 251
Volume	0.34 CBM / 10.14 CBF

Dimensions Net (mm/in) Shipping (mm/in)

Width	440 / 17.3	500 / 19.7
Depth	700 / 27.6	770 / 25.4
Height	722 / 28.4	890 / 35.0

Electrical MFS MCA Power(kW)

220-240/50/1	20	10	2.0
208-230/60/1	20	12	2.0

FEATURES

Control Systems	Single, Analog
Refrigerated Hoppers	<input checked="" type="checkbox"/>
Hopper Agitator	
Temperature Display	
Standby Mode	<input checked="" type="checkbox"/>
Auto Closing Dispensing Valves	<input checked="" type="checkbox"/>
Dispensing Speed Control	
Low Mix Indicator Light	<input checked="" type="checkbox"/>
Low Mix Indicator Alarm	<input checked="" type="checkbox"/>
Low Temperature Protection	<input checked="" type="checkbox"/>
Motor Amperage Protection	
High Pressure Protection	<input checked="" type="checkbox"/>
Thermal Overload Protection	<input checked="" type="checkbox"/>

AVAILABLE OPTIONS

Water Cooled	
Top Air Discharge Chute	<input checked="" type="checkbox"/>
Spinner	
Soft Start	<input checked="" type="checkbox"/>
Custom Branding	<input checked="" type="checkbox"/>
Light Box	
Remote Auto Fill	

• Above specifications are subject to change without notice