


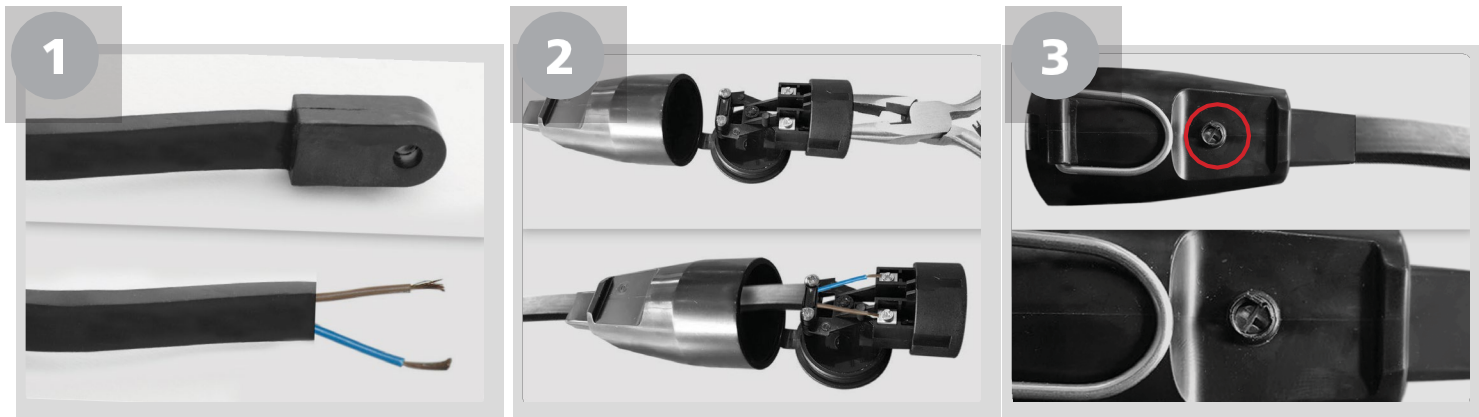

Instructions for (mating) plug installation

PLEASE NOTE: Do not tighten the screw of the (mating) plug until step 3, as it cannot be loosened again.

1. Cut off the end cap of the cable and strip the cable (+-3 cm), see figure 1.
2. Using pliers, pull the inner part out of the plug, as shown in figure 2. Then push the cable through the rectangular end of the plug and screw the two wires to the inside of the socket.
3. push the inner part back into the plug and tighten the top screw (see Fig. 3).

Tips:

1. The (mating) plug is IP44. However, it is recommended to protect the connection when used for long periods outdoors. This can be done by placing the connection under a roof, with a large heat shrink tube, or by hanging the plug upwards so it cannot retain water.

2: Make sure the mating plug hangs down. If the mating plug is hanging upwards, water can get into the socket.

Please note that the screw cannot be loosened once it has been tightened. It is therefore important that the interior is correctly positioned before tightening the screw.