



# SPACE L

-  MEETING
-  DOUBLE
-  W/O FURNITURE

An alternative to classic conference rooms, video rooms and project rooms. Three versions to match every office.



ISOLATION




LOW, MEDIUM  
& HIGH TONES

## MUTE.



SHAPE AND DIMENSIONS mm

+/- 3 mm

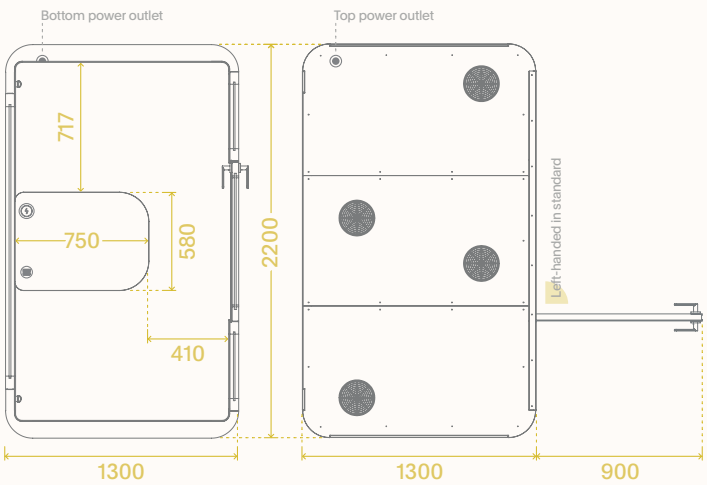

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	2200	1300 +900 mm with open door	2247 +20 mm for leveling
Internal	2000	1192	2080

WEIGHTS kg

NET	GROSS
661	971 including wooden case and packaging parts

COMPOSITION

The construction of Space L is the effect of work of our acoustics, technology and design departments. Walls of Space L are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
  - Felt
  - Metal covers
- Isolating materials
  - Plywood
  - Soundproof glass


USAGE

- Open space
- Reception
- Other public spaces (including railway stations and airports)
- Library
- Breakout area


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

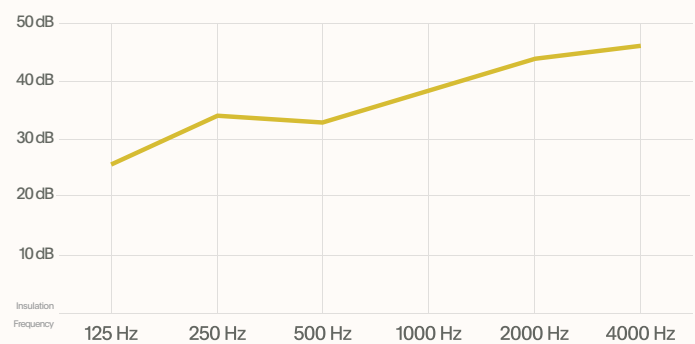


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

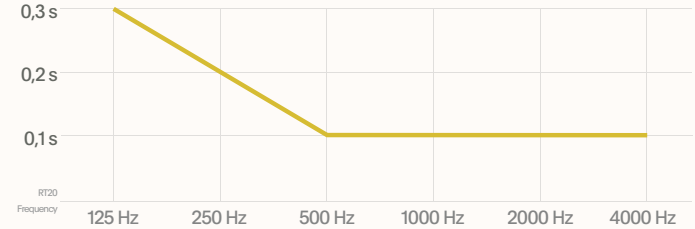

PACKING

- Space L is delivered in two wooden cases, each of following dimensions:

W 2360 × D 885 × H 1345 mm






- Dedicated sofas are delivered in two boxes, each of following dimensions:

W 1220 × D 640 × H 800 mm







SOFAS WITHOUT ARMREST mm +/- 3 mm

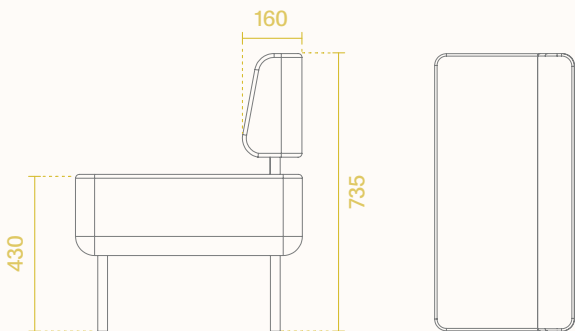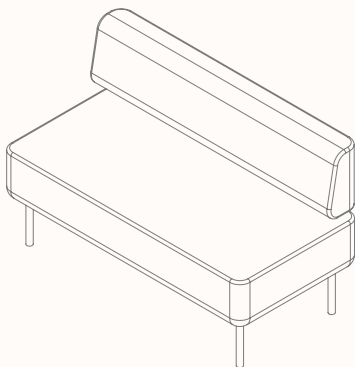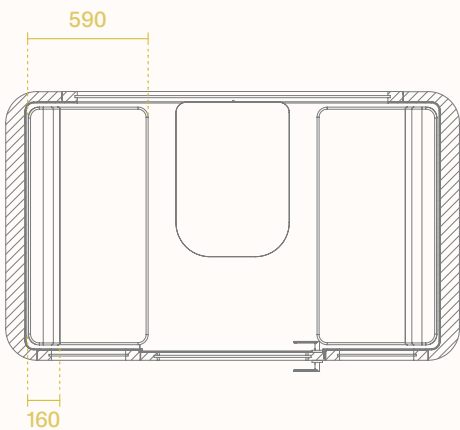

Weight of a single sofa: 17 kg

SOFAS WITH ARMREST mm +/- 3 mm

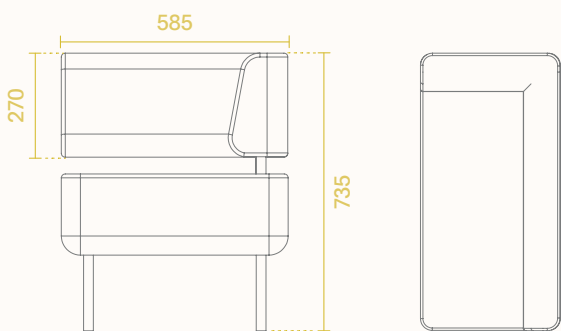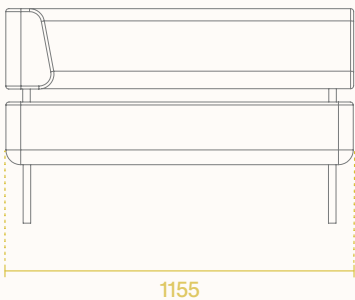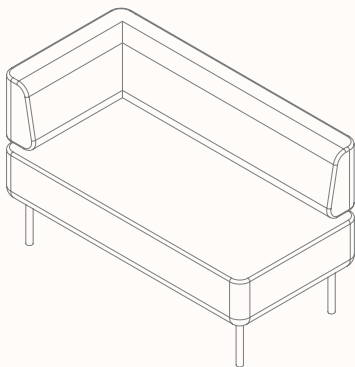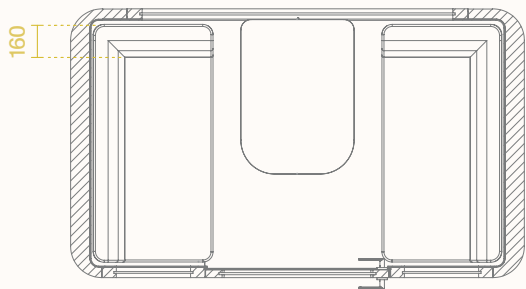

Weight of a single sofa: 23 kg



## TECHNICAL SPECIFICATIONS

## POWER CONSUMPTION



Standby: 4,5 W  
Working: 47 W (fans, LEDs)  
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 70 W  
Power supply voltage: 100 - 240 V AC (50/60Hz)  
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

## FANS PERFORMANCE



Airflow: 180 m<sup>3</sup>/ hour



Fan emitted noise level in L<sub>Aeq</sub>  
Inside ≤ 38 dB  
Outside ≤ 36 dB



The level of outside noise measured at a distance of 1.5 meters.  
The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

## LIGHTING



Power: 24 W  
Brightness: 450 lx (2460 lm at source)  
Light color temp.: 4000 K



Fans and light activated  
by occupancy sensor

## GLASS PROPERTIES PER EN 410



Light transmission: 87  
Light reflection: 8  
Solar energy transmittance: 70  
Reflection of solar radiation: 7  
Total solar energy transmittance: 76

## HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard  
Quality management system of ISO 9001  
Environmental management system of ISO 14001  
FSC Certificate No. C161812

## STANDARD EQUIPMENT



Ventilation system



LED Light



Occupancy sensor



3 electric sockets<sup>1</sup>



Graphite carpet



2 wall hooks  
max load 5 kg



Sliding tabletop

## EQUIPMENT PROPERTIES



Sliding tabletop  
without height adjustment

18 kg

Total weight

700 mm

Mounting height



CBS Lima monitor arm  
with VESA 75 & 100 plate

27"

Recommended screen size

6,5 kg

Maximum monitor weight

+80°/-10° VESA plate tilt range

## OPTIONAL ADDONS



2 sofas with/without armrest  
in Synergy or Remix3 fabric



CBS Lima monitor arm  
(white/black/silver)



Twin USB-A port<sup>2</sup>  
integrated in the tabletop



Induction charger<sup>2</sup>  
integrated in the tabletop



LAN connection<sup>3</sup>  
with 10 m wire



Light and ventilation  
control panel



Right-handed  
door opening



Integrated wheels  
for easy relocation

<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.



<sup>2</sup> Electric socket, USB ports and induction charger are available only in black.

<sup>3</sup> An optional 10 m LAN cable is set with a main power wire.



SHAPE AND DIMENSIONS mm

+/- 3 mm

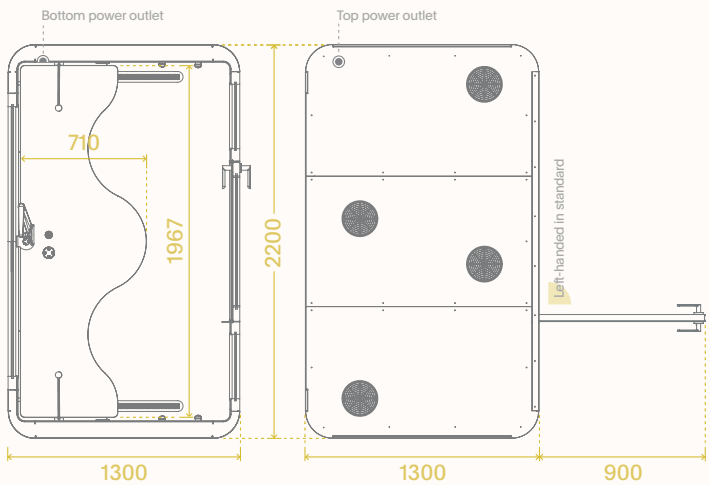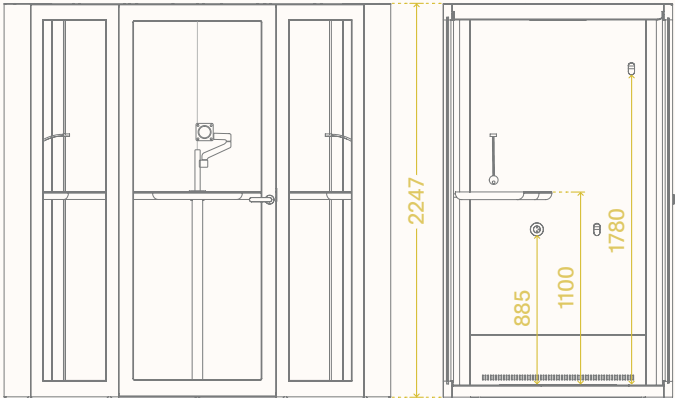

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	2200	1300 +900 mm with open door	2247 +20 mm for leveling
Internal	2000	1192	2080

WEIGHTS kg

NET	GROSS
661	941 including wooden case and packaging parts

COMPOSITION

The construction of Space L is the effect of work of our acoustics, technology and design departments. Walls of Space L are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
- Felt
- Isolating materials
- Metal covers
- Plywood
- Soundproof glass


USAGE

- Open space
- Library
- Reception
- Breakout area
- Other public spaces (including railway stations and airports)


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

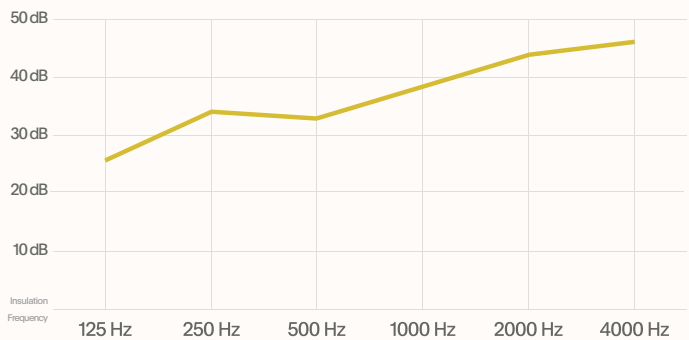


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

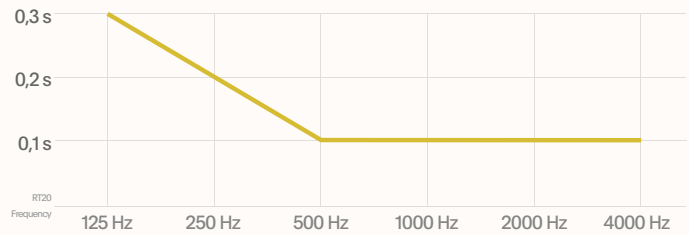

PACKING

- Space L is delivered in two wooden cases, each of following dimensions:

W 2360 × D 885 × H 1345 mm





## TECHNICAL SPECIFICATIONS

## POWER CONSUMPTION



Standby: 4,5 W  
Working: 47 W (fans, LEDs)  
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 75 W  
Power supply voltage: 100 - 240 V AC (50/60Hz)  
Supply voltage for ventilation, lighting  
and addons: 12 - 24 V DC

## FANS PERFORMANCE



Airflow: 180 m<sup>3</sup>/ hour



Fan emitted noise level in L<sub>Aeq</sub>  
Inside ≤ 39 dB  
Outside ≤ 36 dB



The level of outside noise measured at a distance of 1.5 meters.  
The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices  
(<45 dB) and will create an acoustic background for employees nearby.

## STANDARD EQUIPMENT



Ventilation  
system



LED  
Light



Occupancy  
sensor



3 electric  
sockets<sup>1</sup>



Graphite  
carpet



4 wall hooks  
max load 5 kg



Profiled  
tabletop

## OPTIONAL ADDONS



Twin USB-A port<sup>2</sup>  
integrated in the tabletop



Induction charger<sup>2</sup>  
integrated in the tabletop



LAN connection<sup>3</sup>  
with 10 m wire



Two flexible lamps<sup>2</sup>  
with USB-A port



Light and ventilation  
control panel



CBS Lima monitor arm  
(white/black/silver)



Right-handed  
door opening



Integrated wheels  
for easy relocation

## LIGHTING



Power: 24 W  
Brightness: 844 lx (2460 lm at source)  
Light color temp.: 4000K



Fans and light activated  
by occupancy sensor



Wall lamp with 17 W USB-charger  
Brightness: 100 lx  
Light color temp.: 4000K  
Power usage: 1,5 W

## GLASS PROPERTIES PER EN 410



Light transmission: 87  
Light reflection: 8  
Solar energy transmittance: 70  
Reflection of solar radiation: 7  
Total solar energy transmittance: 76

## HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard  
Quality management system of ISO 9001  
Environmental management system of ISO 14001  
FSC Certificate No. C161812

## EQUIPMENT PROPERTIES



Profiled tabletop  
without height adjustment

34 kg Total weight

1100 mm Mounting height



CBS Lima monitor arm  
with VESA 75 & 100 plate

27" Recommended screen size

6,5 kg Maximum monitor weight

+80°/-10° VESA plate tilt range

<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.


<sup>2</sup> Electric socket, USB ports, lamp and induction charger are available only in black.

<sup>3</sup> An optional 10 m LAN cable is set with a main power wire.



SHAPE AND DIMENSIONS mm

+/- 3 mm

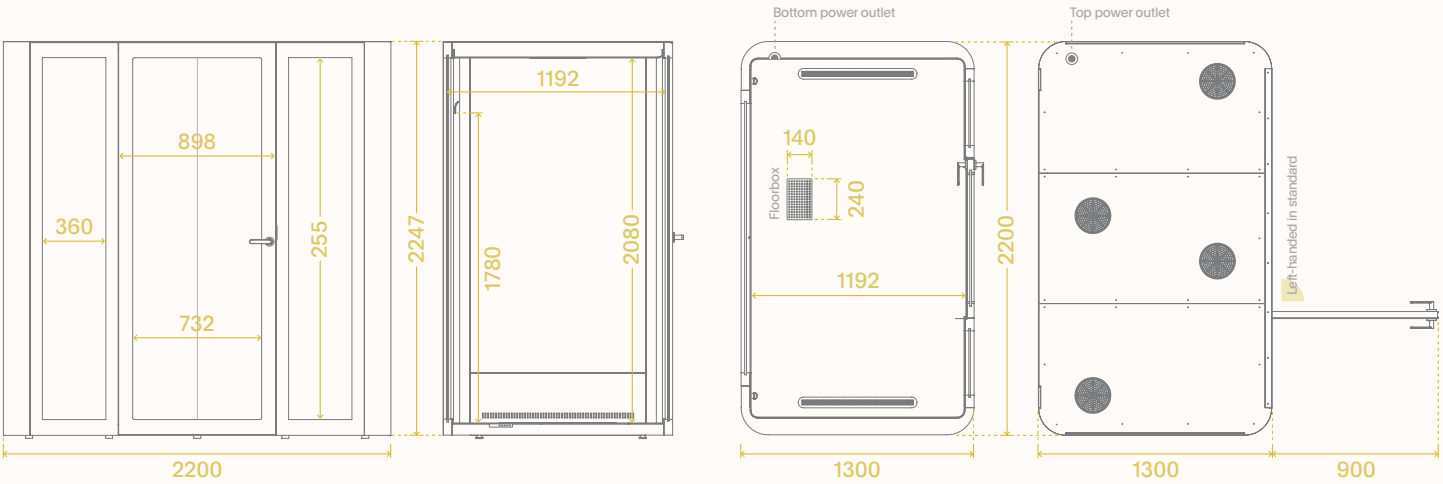

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	2200	1300 +900 mm with open door	2247 +20 mm for leveling
Internal	2000	1192	2080

WEIGHTS kg

NET	GROSS
661	907 including wooden case and packaging parts

COMPOSITION

The construction of Space L is the effect of work of our acoustics, technology and design departments. Walls of Space L are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials

Metal covers
- Felt

Plywood
- Isolating materials

Soundproof glass

USAGE

- Open space

Reception

Other public spaces (including railway stations and airports)
- Library

Breakout area


CARE

- Keep the product dry


Vacuum and clean regularly

Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

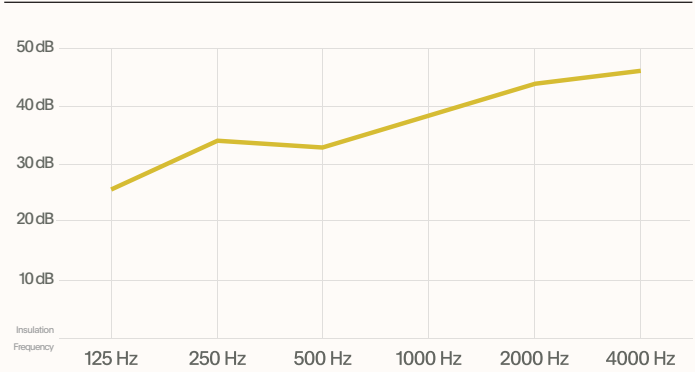


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

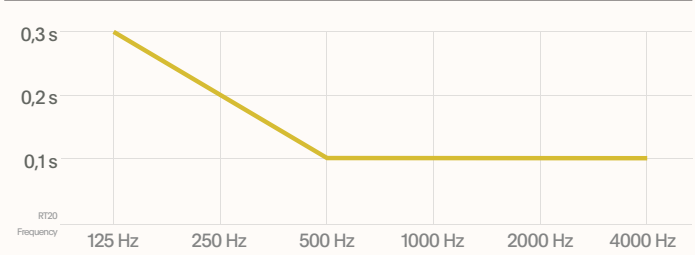

PACKING

- Space L is delivered in two wooden cases, each of following dimensions:

W 2360 × D 885 × H 1345 mm





## TECHNICAL SPECIFICATIONS

## POWER CONSUMPTION



Standby: 4,5 W  
Working: 47 W (fans, LEDs)  
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 70 W  
Power supply voltage: 100 - 240 V AC (50/60Hz)  
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

## FANS PERFORMANCE



Airflow: 180 m<sup>3</sup>/ hour



Fan emitted noise level in L<sub>Aeq</sub>  
Inside ≤ 38 dB  
Outside ≤ 36 dB



The level of outside noise measured at a distance of 1.5 meters.  
The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

## LIGHTING



Power: 24 W  
Brightness: 450 lx (2460 lm at source)  
Light color temp.: 4000K



Fans and light activated  
by occupancy sensor

## GLASS PROPERTIES PER EN 410



Light transmission: 87  
Light reflection: 8  
Solar energy transmittance: 70  
Reflection of solar radiation: 7  
Total solar energy transmittance: 76

## HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard  
Quality management system of ISO 9001  
Environmental management system of ISO 14001  
FSC Certificate No. C161812

## STANDARD EQUIPMENT



Ventilation system<sup>2</sup>



LED Light



Occupancy sensor



3 electric sockets in the floorbox<sup>1</sup>



Graphite carpet



2 wall hooks max load 5 kg

## OPTIONAL ADDONS



Twin USB-A port in the floorbox<sup>2</sup>



LAN connection<sup>3</sup> with 10 m wire



Right-handed door opening



Integrated wheels for easy relocation



Light and ventilation control panel


<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.

<sup>2</sup> Electric socket and USB ports are available only in black.







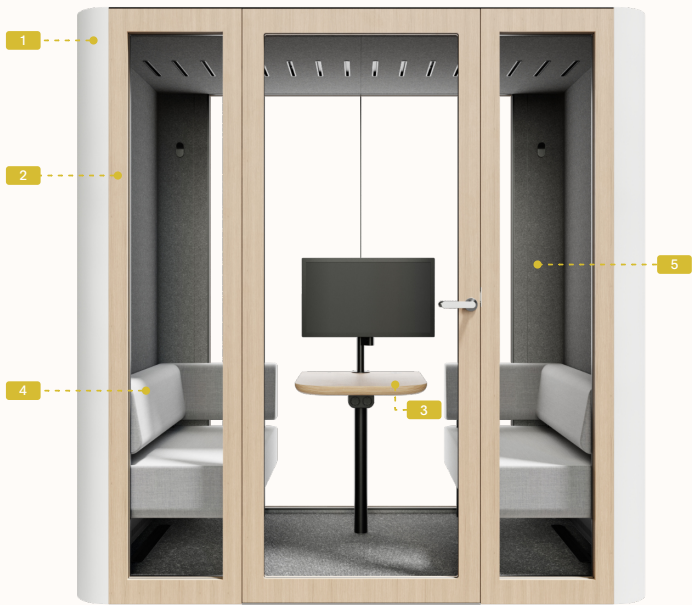




<sup>3</sup> An optional 10 m LAN cable is set with a main power wire.




FINISHES








1 EXTERNAL WALLS AND ROOF PAINT COLOURS

STANDARD	 Snow White Ultra Matt RAL 9003	
	 Powder Grey Ultra Matt RAL 7035	 New York Grey Ultra Matt NCS S 3000-N
EXTRA	 Pepper Grey Ultra Matt RAL 7012	 Panther Black Ultra Matt RAL 9005
	 Ceramic Red Ultra Matt NCS S 4050-Y70R	 Dusk Blue Ultra Matt NCS S 4050-Y70R
	 St. Tropez Yellow Ultra Matt RAL 1018	 Stainless Steel Brushed
	 Whiteboard White Glossy Anti-graffiti coating	 Custom colour From RAL palette




















2 EXTERNAL FRAME LAMINATES & VENEERS

STANDARD	 Snow White NCS S 05000-N	
	 New York Grey NCS S 3000-N	 Powder Grey NCS 1502-G
EXTRA	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
	 Whitebard White Glossy 9317-HW	 Black Premium Anti-fingerprint 0720
	 Oak Wood	 Maple Wood


3 INTERNAL TABLETOP LAMINATES & VENEERS

STANDARD	 Snow White NCS S 05000-N	
	 Powder Grey NCS 1502-G	 New York Grey NCS S 3000-N
EXTRA	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
	 Grey Premium Anti-fingerprint 0725	 Black Premium Anti-fingerprint 0720
	 Maple Wood	 Oak Wood

4 INTERNAL OPTIONAL SOFA FABRIC FOR MEETING

K/ADRIAT REMIX 3	 0422	 0452	 0566	 0906
	 0242	 0123	 0136	 0133
CAMBRAS ENERGY	 0152	 0173	 LDS16	 LDS17
	 LDS28	 LDS58	 LDS76	 LDS77
	 LDS22	 LDS32	 LDS08	 LDS31

5 INTERNAL FELT LININGS

 Beige	 Grey
 Dark Grey	



