



# SPACE S

● STANDARD

☐ VIDEO CONFERENCE

A peaceful and serene workspace,  
allowing maximum focus and minimal  
distraction. Now with video conference.



ISOLATION





LOW, MEDIUM  
& HIGH TONES

## MUTE.

SHAPE AND DIMENSIONS mm

+/- 3 mm

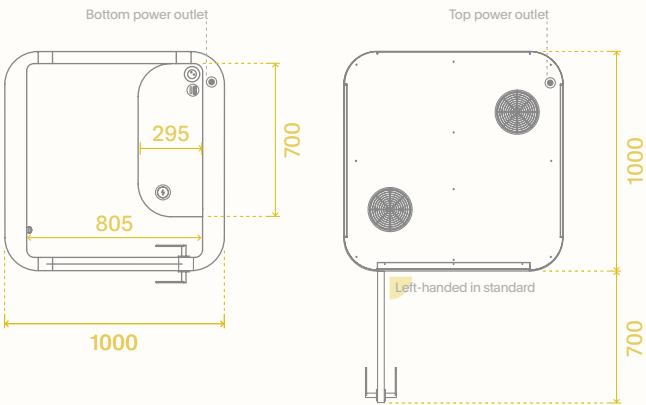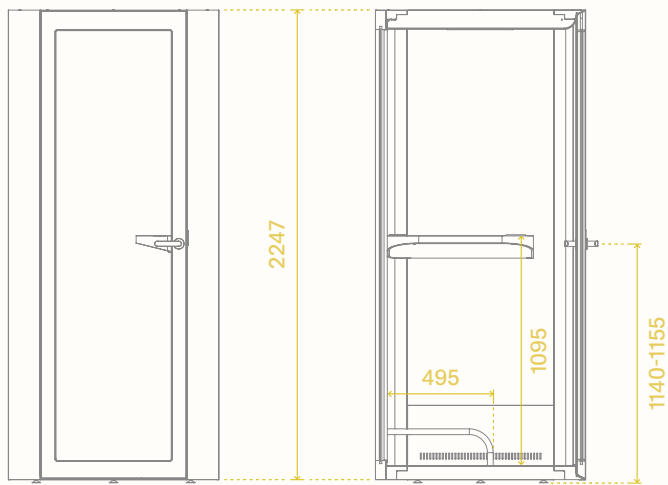

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	1000	1000 +700 mm with open door	2247 +20 mm for leveling
Internal	805	887	2080

WEIGHTS kg

NET	GROSS
347	414 including cardboards and packaging parts

COMPOSITION

The construction of Space S is the effect of work of our acoustics, technology and design departments. Walls of Space S pod are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
  - Metal covers
- Felt
  - Plywood
- Isolating materials
  - Soundproof glass


USAGE

- Open space
  - Reception
  - Other public spaces (including railway stations and airports)
- Call center
  - Breakout area
- Library


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

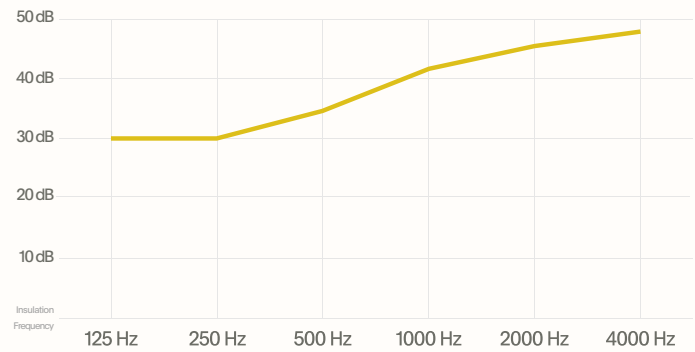


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

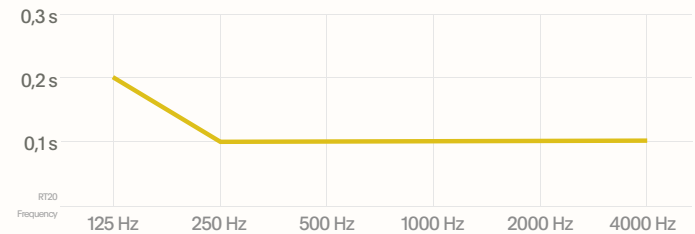

PACKING

- Space S is delivered in 2 cardboard boxes:

W 2335 x D 1160 x H 1310 mm



## TECHNICAL SPECIFICATIONS

## POWER CONSUMPTION



Standby: 4,5 W  
Working: 16 W (fans, LEDs)  
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 35 W  
Power supply voltage: 100 - 240 V AC (50/60Hz)  
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

## FANS PERFORMANCE



Airflow: 63 m<sup>3</sup>/ hour



Fan emitted noise level in L<sub>Aeq</sub>  
Inside ≤ 39 db  
Outside ≤ 35 dB



The level of outside noise measured at a distance of 1.5 meters.  
The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

## LIGHTING



Power: 6 W  
Brightness: 307 lx (615 lm at source)  
Light color temp.: 4000K



Fans and light activated  
by occupancy sensor

## GLASS PROPERTIES PER EN 410



Light transmission: 87  
Light reflection: 8  
Solar energy transmittance: 70  
Reflection of solar radiation: 7  
Total solar energy transmittance: 76

## HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard  
Quality management system of ISO 9001  
Environmental management system of ISO 14001  
FSC Certificate No. C161812

## STANDARD EQUIPMENT



Ventilation  
system



LED  
Light



Occupancy  
sensor



Electric  
socket<sup>1</sup>



Graphite  
carpet



Wall hook  
max load 5 kg



Wall-mounted  
tabletop

## OPTIONAL ADD-ONS



USB A+C port<sup>2</sup>  
integrated in the tabletop



Induction charger<sup>2</sup>  
integrated in the tabletop



LAN connection<sup>3</sup>  
with 10 m wire



Light and ventilation  
control panel



Height-adjustable stool  
with footrest



Wall-mounted  
back support



Integrated wheels  
for easy relocation



Right-handed door opening

## OPTIONAL EQUIPMENT'S DIMENSIONS mm



Height-adjustable stool  
with footrest in Remix3

12 kg Total weight



✓ Floor-integrated



Height fixed wall-mounted  
back support in Remix3

4 kg Total weight in kg

850 mm Height from a pod's floor

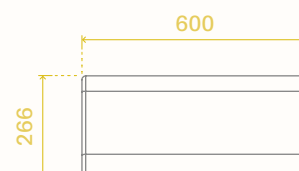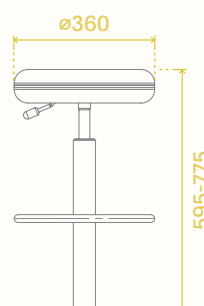


<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.

<sup>2</sup> Electric socket, USB ports and induction charger are available only in black.

<sup>3</sup> An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.

SHAPE AND DIMENSIONS mm

+/- 3 mm

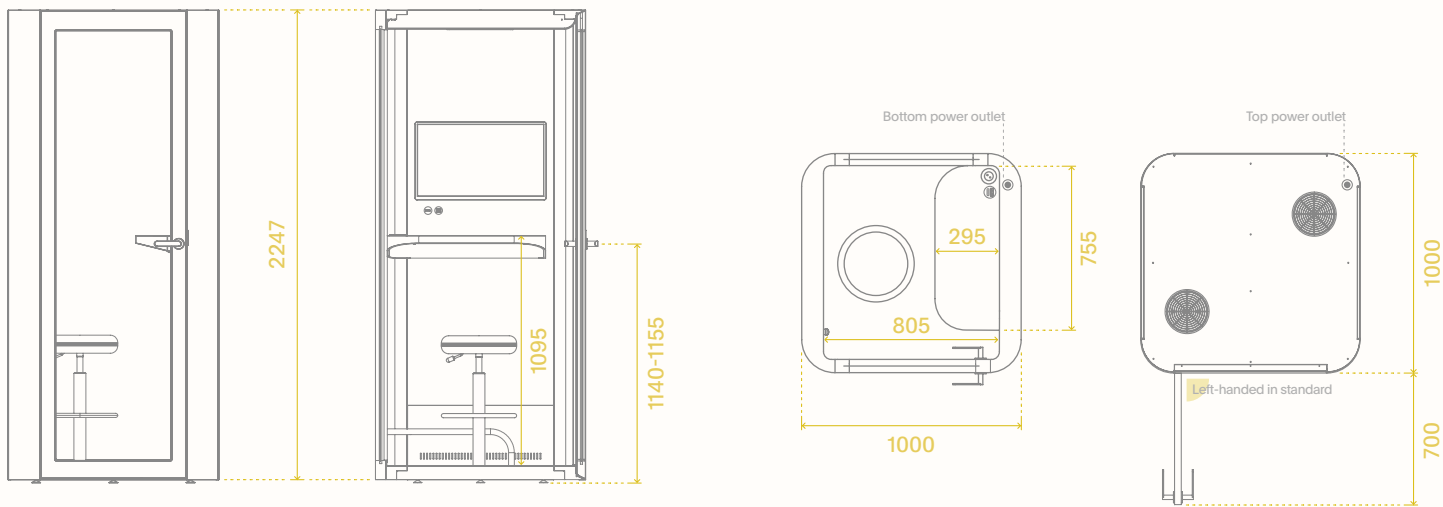

DIMENSIONS mm			
	WIDTH	DEPTH	HEIGHT
External	1000	1000 +700 mm with open door	2247 +20 mm for leveling
Internal	805	887	2080

COMPOSITION

The construction of Space S is the effect of work of our acoustics, technology and design departments. Walls of Space S pod are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
  - Metal covers
- Felt
  - Plywood
- Isolating materials
  - Soundproof glass

USAGE


- Open space
  - Reception
  - Other public spaces (including railway stations and airports)
- Call center
  - Breakout area
- Library

CARE


- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

WEIGHTS kg	
NET	GROSS
360	427 including cardboards and packaging parts

AVERAGE SOUND INSULATION

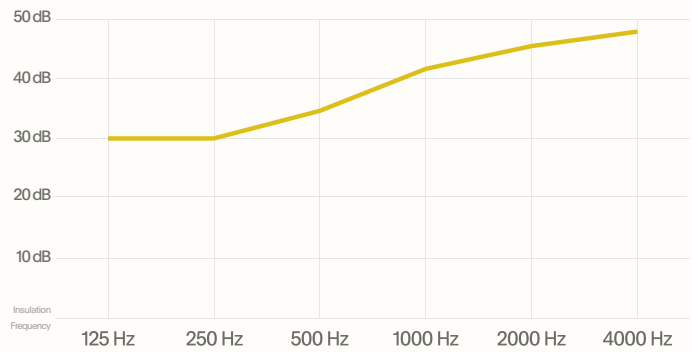


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

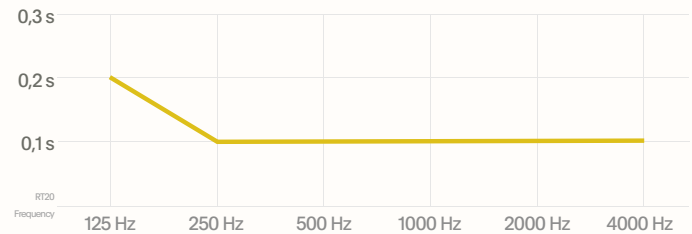

PACKING

- Space S is delivered in 2 cardboard boxes:

W 2335 x D 1160 x H 1310 mm



## TECHNICAL SPECIFICATIONS

## POWER CONSUMPTION



Standby: 4,5 W  
Working: 16 W (fans, LEDs)  
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 35 W  
Power supply voltage: 100 - 240 V AC (50/60Hz)  
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

## FANS PERFORMANCE



Airflow: 63 m<sup>3</sup>/ hour



Fan emitted noise level in L<sub>Aeq</sub>  
Inside ≤ 39 db  
Outside ≤ 35 dB



The level of outside noise measured at a distance of 1.5 meters.  
The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

## LIGHTING



Power: 6 W  
Brightness: 307 lx (615 lm at source)  
Light color temp.: 4000K



Fans and light activated  
by occupancy sensor

## GLASS PROPERTIES PER EN 410



Light transmission: 87  
Light reflection: 8  
Solar energy transmittance: 70  
Reflection of solar radiation: 7  
Total solar energy transmittance: 76

## HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard  
Quality management system of ISO 9001  
Environmental management system of ISO 14001  
FSC Certificate No. C161812

## STANDARD EQUIPMENT



Ventilation system



LED Light



Occupancy sensor



Electric socket<sup>1</sup>



Graphite carpet



Wall hook  
max load 5 kg



Wall-mounted tabletop



USB and HDMI ports for video<sup>2</sup>



USB A+C port<sup>2</sup>



Height-adjustable stool with footrest



Wall-integrated monitor bracket

## OPTIONAL ADD-ONS



LAN connection<sup>3</sup>  
with 10 m wire



Light and ventilation control panel



Integrated wheels for easy relocation



Right-handed door opening

## EQUIPMENT DIMENSIONS mm



Height-adjustable stool with footrest in Remix3

12 kg Total weight



✓ Centrally floor-integrated



Wall-integrated bracket with VESA 75 & 100 plate

24" Recommended screen size

27" Maximum screen size

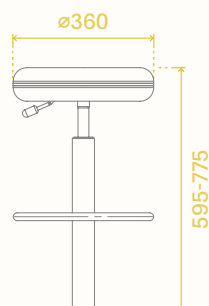


<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.







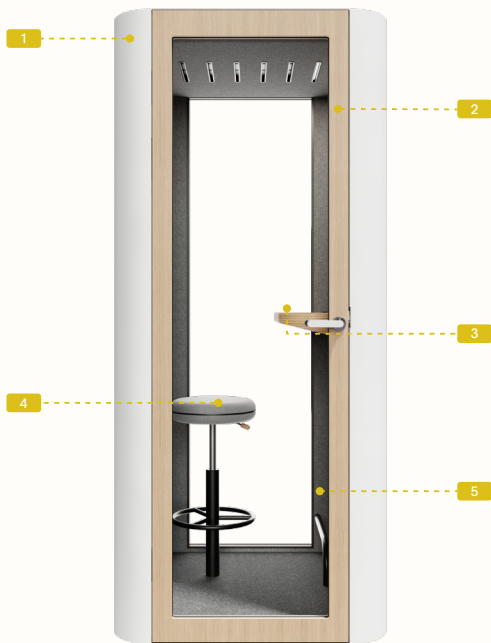



<sup>2</sup> Electric socket, HDMI and USB ports are available only in black.

<sup>3</sup> An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.










FINISHES



1 EXTERNAL WALLS AND ROOF PAINT COLOURS

STANDARD	 Snow White Ultra Matt RAL 9003	
	 Powder Grey Ultra Matt RAL 7035	 New York Grey Ultra Matt NCS S 3000-N
EXTRA	 Pepper Grey Ultra Matt RAL 7012	 Panther Black Ultra Matt RAL 9005
	 Ceramic Red Ultra Matt NCS S 4050-Y70R	 Dusk Blue Ultra Matt NCS S 4010-B50G
	 St. Tropez Yellow Ultra Matt RAL 1018	 Whiteboard White Glossy Anti-graffiti coating
	 Custom colour From RAL palette	











2 EXTERNAL FRAME LAMINATES & VENEERS

STANDARD	 Snow White NCS S 0500-N	
EXTRA	 Powder Grey NCS S 1502-G	 New York Grey NCS S 3000-N
	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
	 Whiteboard White Glossy 9417-HW	 Black Premium Anti-fingerprint 0720
	 Maple Wood	 Oak Wood



3 INTERNAL TABLETOP LAMINATES & VENEERS

STANDARD	 Snow White NCS S 0500-N	
EXTRA	 Powder Grey NCS 1502-G	 New York Grey NCS S 3000-N
	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
	 Grey Premium Anti-fingerprint 0725	 Black Premium Anti-fingerprint 0720
	 Maple Wood	 Oak Wood

4 INTERNAL STOOL/BACK SUPPORT FABRIC

KVAADRAT REMIX 3	 0422	 0452	 0566	 0906
	 0242	 0123	 0136	 0133
	 0152	 0173		

5 INTERNAL FELT LININGS

 Beige	 Grey
 Dark Grey	





Space S | MUTE.