

MBC Guttin

The Expert of Winding and Unwinding

PRESENTATION

French manufacturer of safety chucks, expandable airshafts, brakes and spreading equipment.

Several patents ensure quality and know-how our company.

Specific products

SIMPLIFIED MAINTENANCE :

- Interchangeability of wear parts within few minutes (**from the front face**)
- 100% Steel manufacturing (**easier to meet specific requirements**)
- Safety chucks with riveted bellows (in accordance with European norms)
- Changing the bladder in few minutes

SECTORS OF ACTIVITIES



Manual safety chucks



Pneumatic safety chucks



Self-centring pneumatic safety chucks



Assembling



Expandable Material and spare parts



Spreading equipment



Brakes



Others

PNEUMATIC SELF-CENTRING CHUCKS

Multi-functions self-centring chucks



Several adapters



**Self-centring
Multifunction
Safety chucks
Serie 2000—2100**

SHAFT ENDS



STD



MD



BD



AC

SAFETY CHUCK SERIE 2100



SFE



SFE/G



SFE/R



SFE/ST



SFE/STG

SAFETY CHUCK SERIE 2000



SFE



SFE/G



SFE/R



SFE/ST



SFE/STG

SAFETY CHUCK SERIE 2000/2100

MBC
Guttin


Available : - Serie 20/30 to 80/120

- With 60 mm stroke

- With 100 mm stroke



Others on request

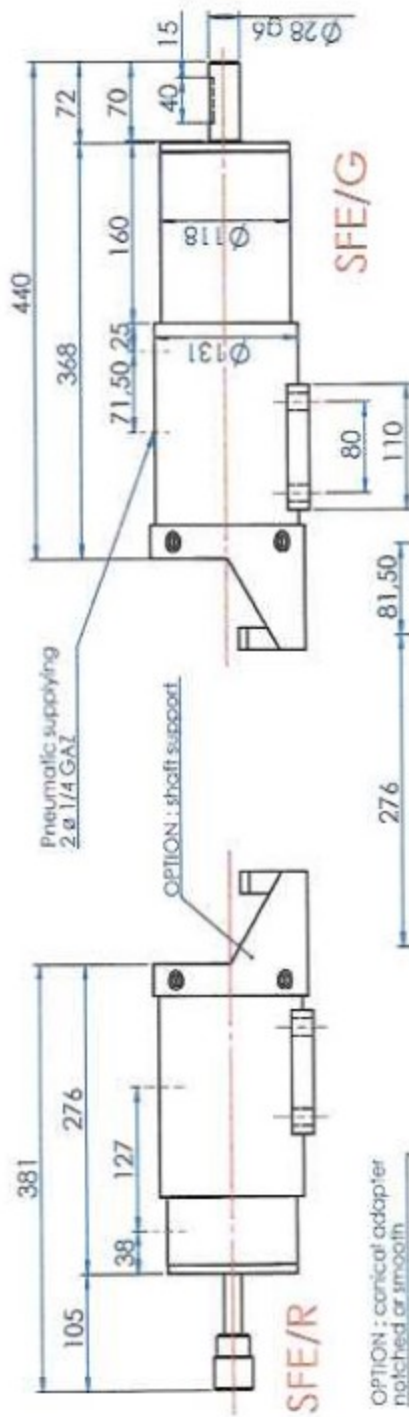


SFE/R

SFE/G

SFE

OPTION : conical adapter
notched or smooth






PNEUMATIC SAFETY CHUCK **SERIE 2000 20/30** **STROKE 60mm**

Rollweight : 8000 N
 Available with stroke 100 mm



OPTION : conical adapter
smooth or notched

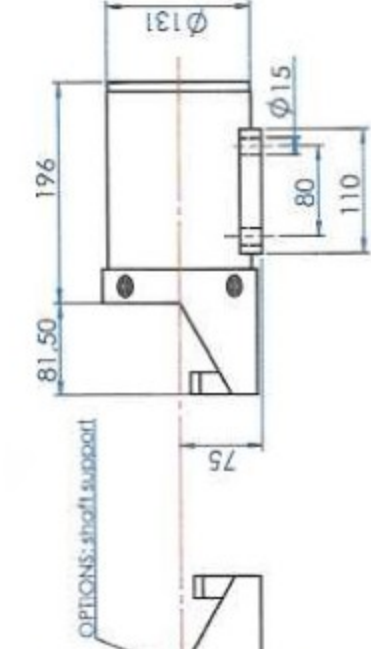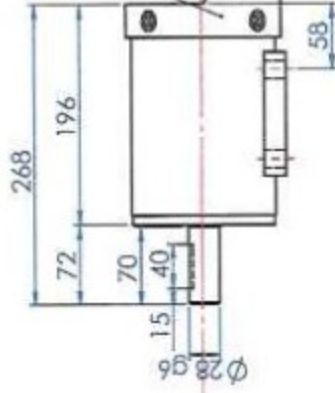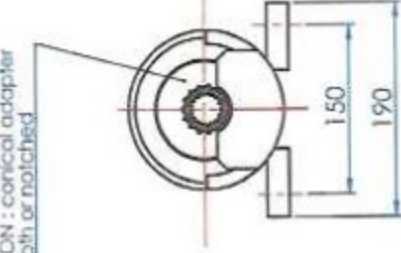

SFE/STG


SFE/ST



SAFETY CHUCK non-translatory *MBC*
Guttin
SERIE 2000 20/30


Rollweight : 8000 N



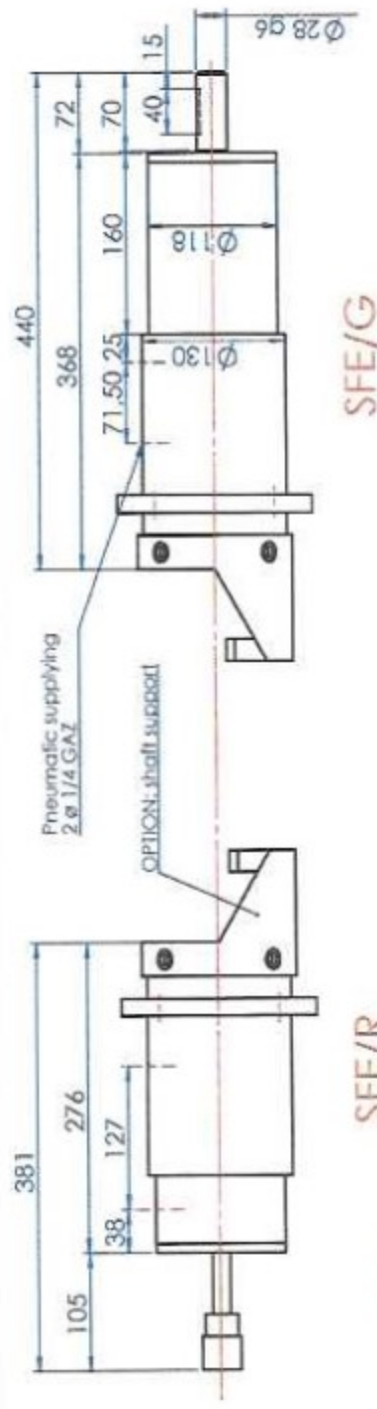

SFE/R

SFE/G

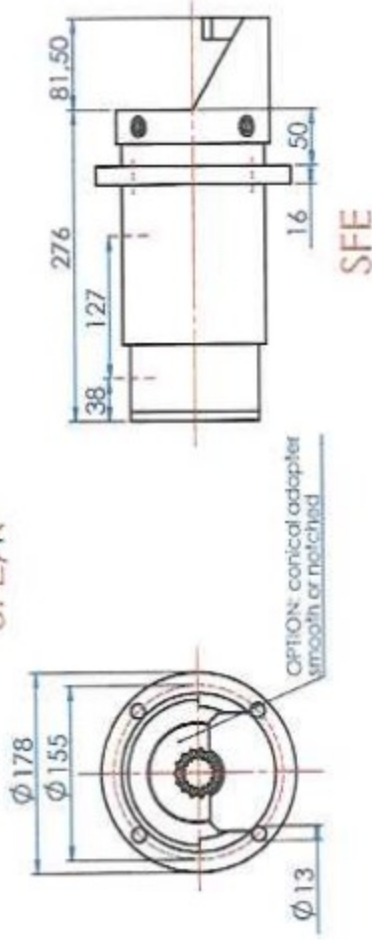


SFE



PNEUMATIC SAFETY CHUCK *MBC*
Guttin
SERIE 2100 20/30
STROKE 60

Rollweight : 8000 N
Available with stroke 100 mm



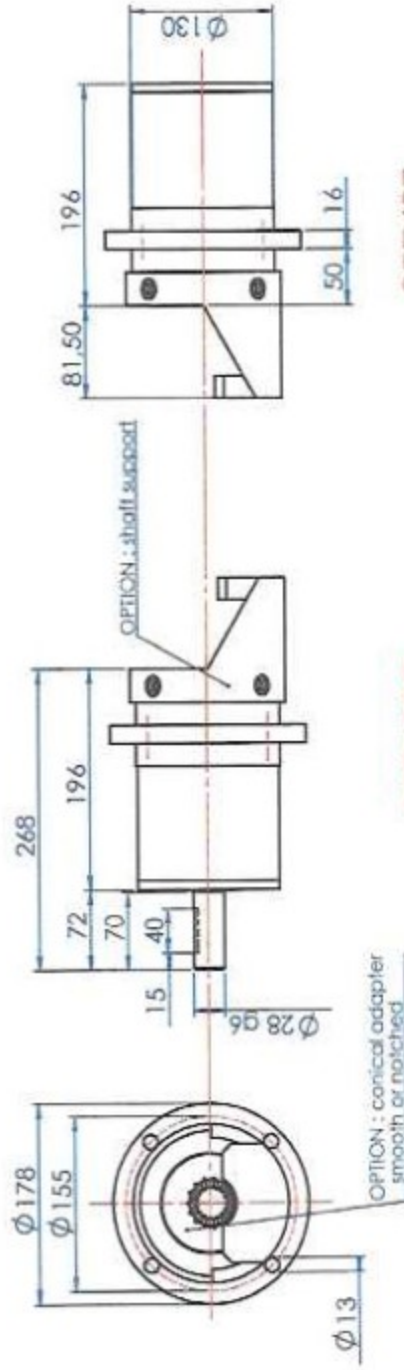

SFE/STG


SFE/ST



SAFETY CHUCK - non Translatory *MBC*
SERIE 2100 20/30 *Cuttin*

Rollweight : 8000 N




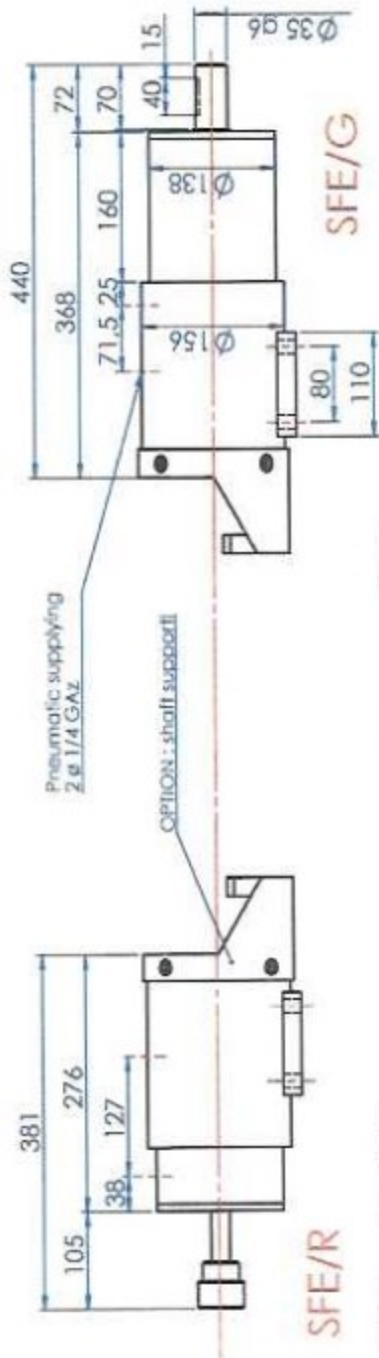


SFE/R

SFE/G

OPTION : conical adapter
smooth or notched

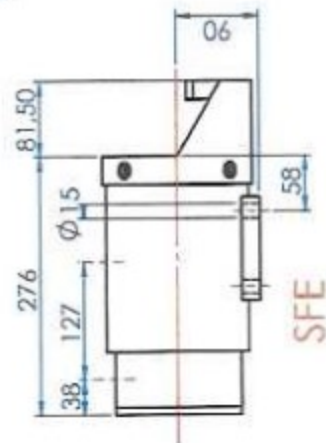




SFE



PNEUMATIC SAFETY CHUCK *MBC*
Guttin
SERIE 2000 30/40
STROKE 60mm

Rollweight : 16000 N
Available with stroke 100 mm




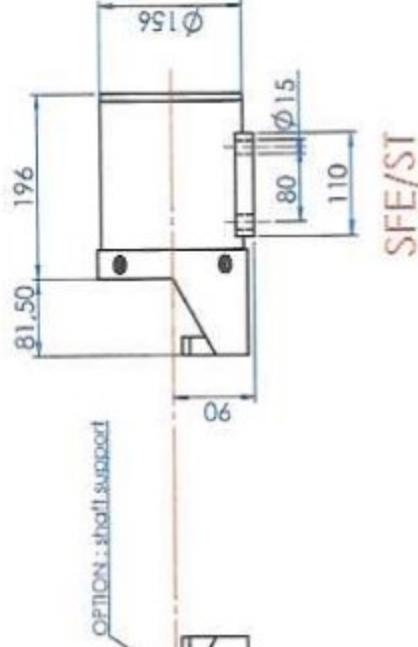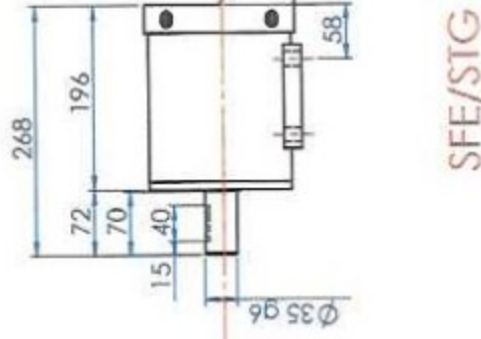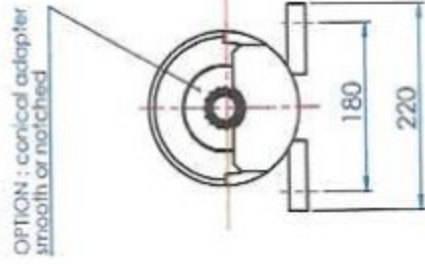

SAFETY CHUCK - non Translatory *MBC*
Guttin
SERIE 2000 30/40


Rollweight : 16000N



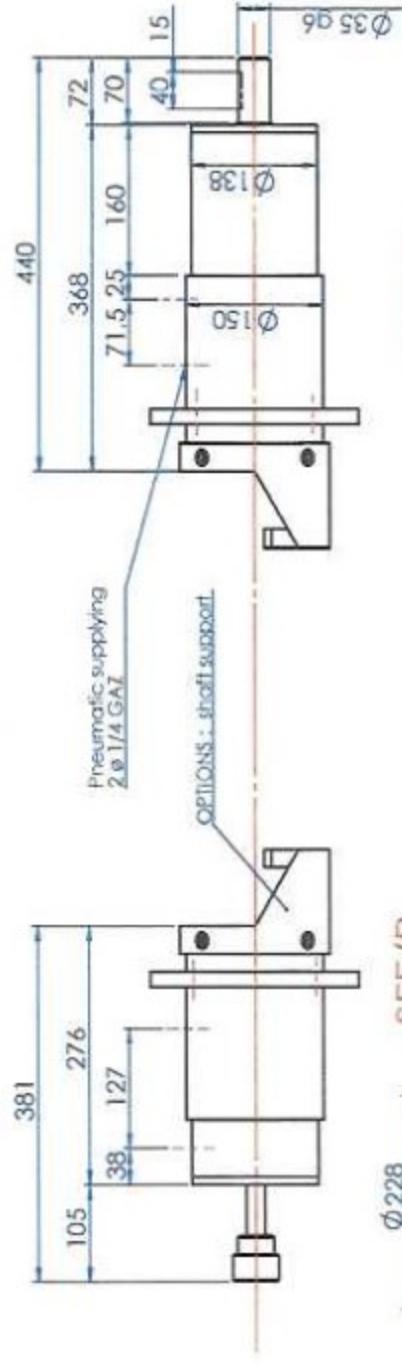

SFE/G

SFE/R

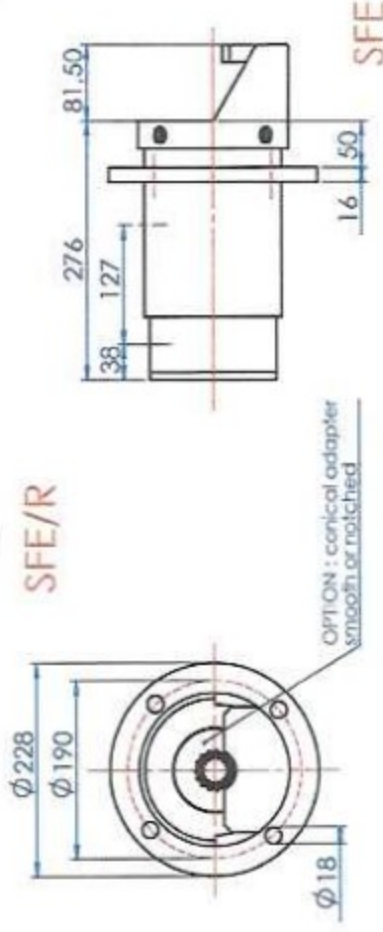


SFE



PNEUMATIC SAFETY CHUCK *MBC*
Guttin
SERIE 2100 30/40
STROKE 60mm

Spulengewicht : 16000 N
Available with stroke 100 mm



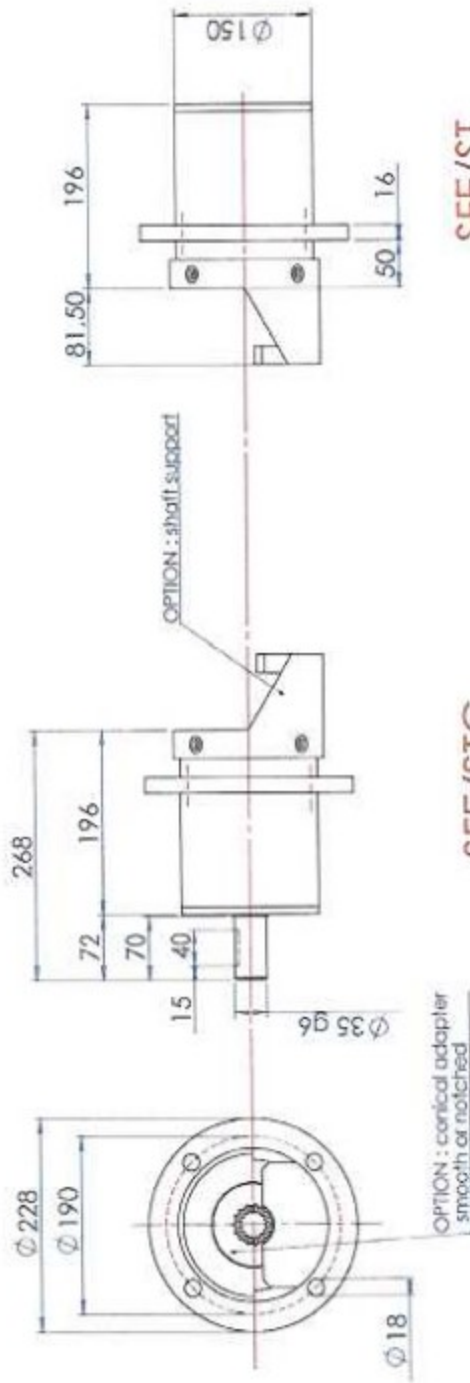

SFE/STG

SFE/ST






SAFETY CHUCK - non Translatory
SERIE 2100 30/40

MBC
Guttin

Rollweight : 16000 N



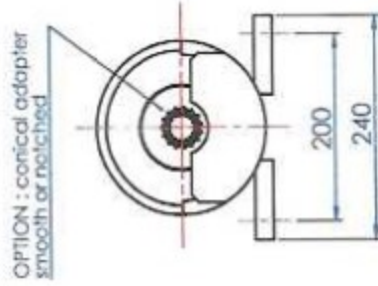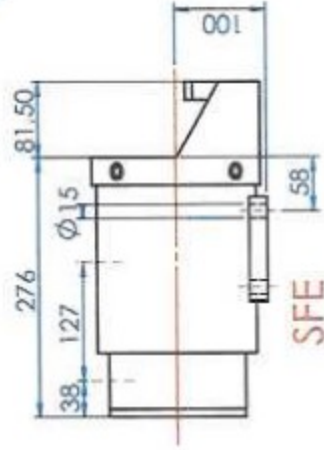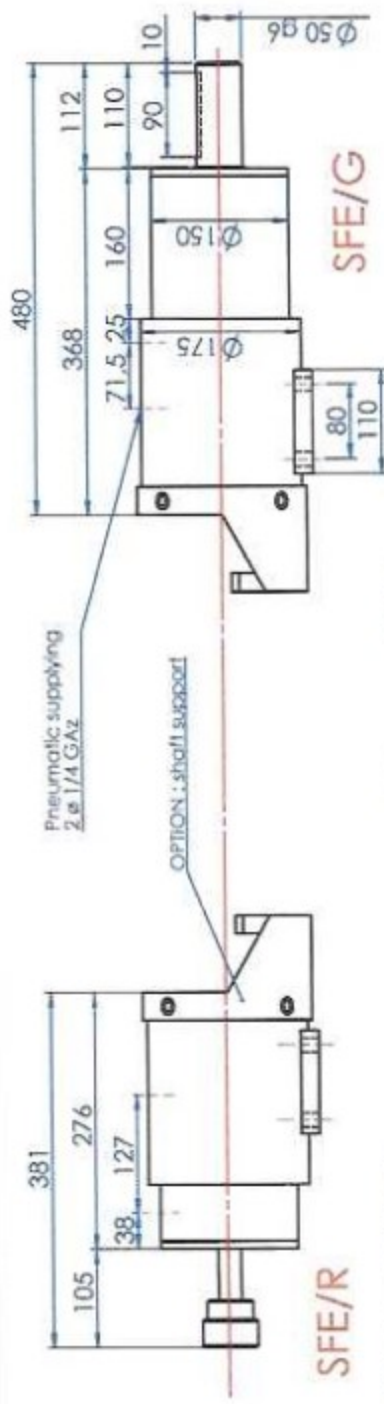



PNEUMATIC SAFETY CHUCK
SERIE 2000 40/50
STROKE 60mm

MBC
Cuttin


Rollweight : 28500 N
 Available with stroke 100 mm



OPTION : conical adapter
smooth or notched

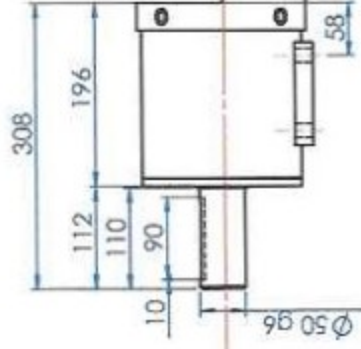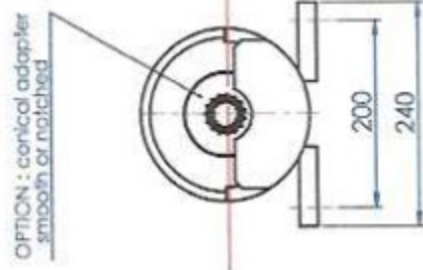

SFE/STG

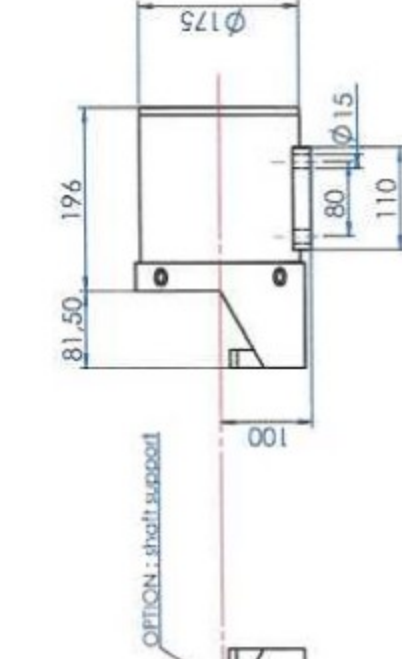

SFE/ST




SAFETY CHUCK - non Translatory
SERIE 2000 40/50

MBC
Guttin


Rollweight : 28500 N



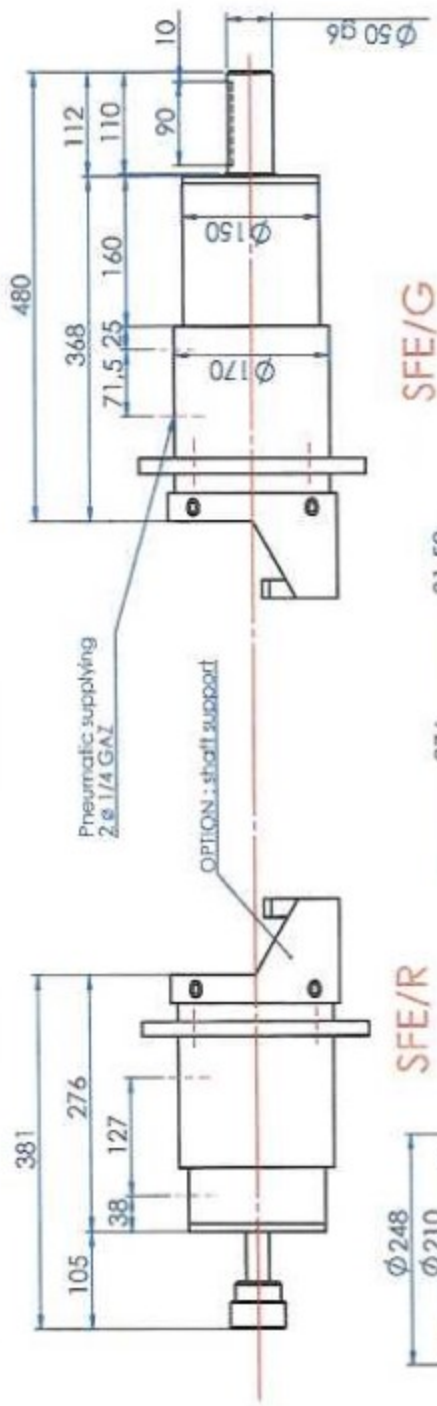

SFE/R

SFE/G

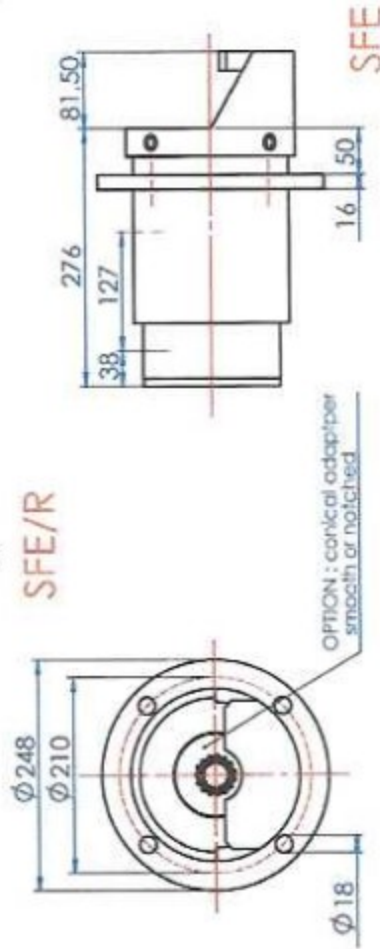

SFE




PNEUMATIC SAFETY CHUCK
SERIE 2100 40/50
STROKE 60mm

Rollweight : 28500 N
 Available with stroke 100 mm

MBC
Guttin



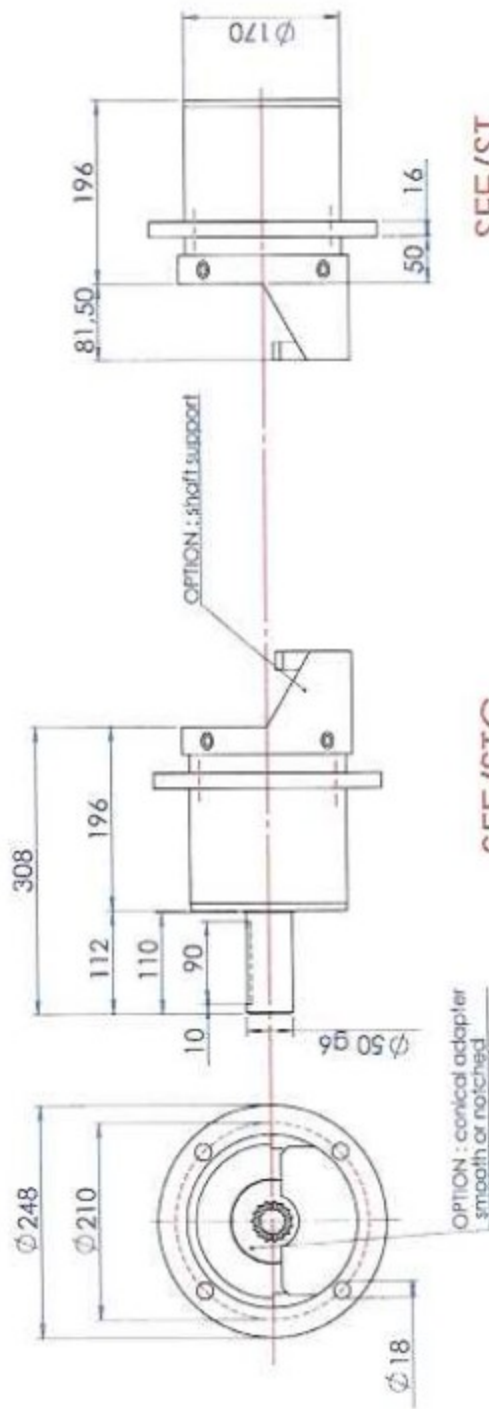

SFE/STG

SFE/ST






SAFETY CHUCK - non Translatory
SERIE 2100 40/50

MBC
Guttin

Rollweight : 28500 N



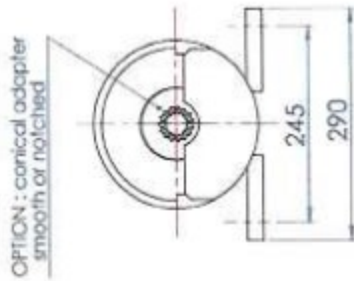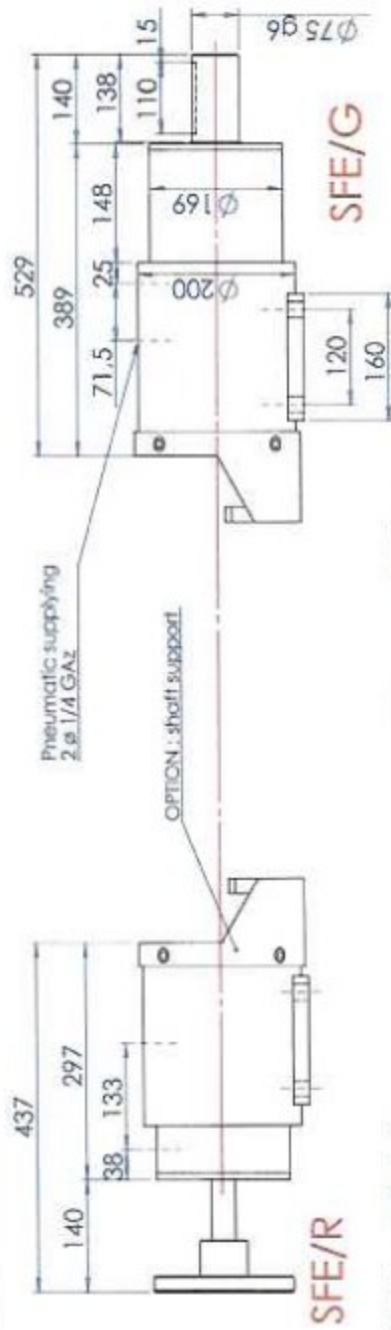


PNEUMATIC SAFETY CHUCK
SERIE 2000 50/80
STROKE 60mm

Rollweight : 72000 N
 Available with stroke 100 mm

MBC
Guttin



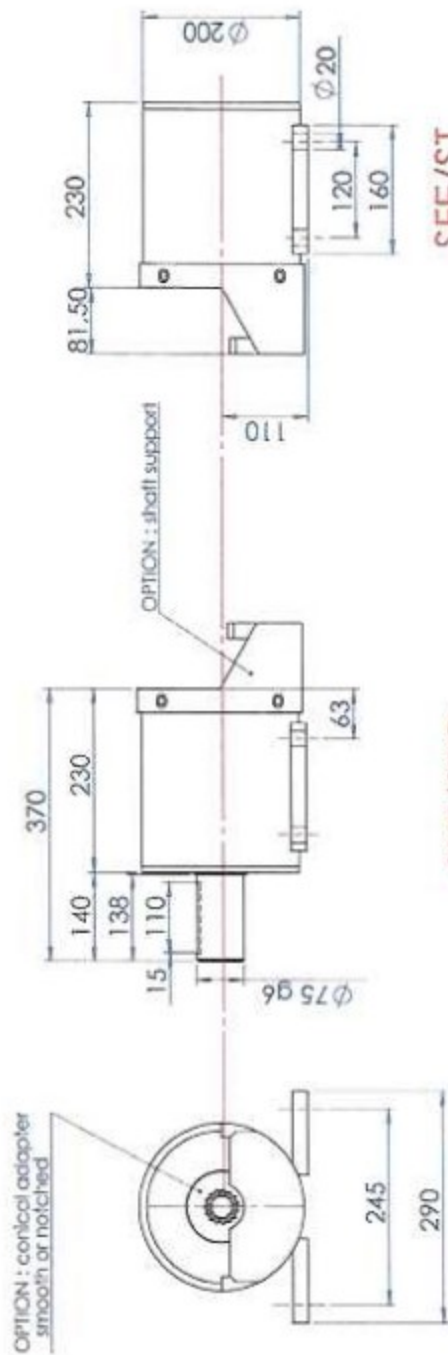

SFE/STG

SFE/ST




SAFETY CHUCK - non Translatory
SERIE 2000 50/80


MBC
Guttin

Rollweight : 72000 N



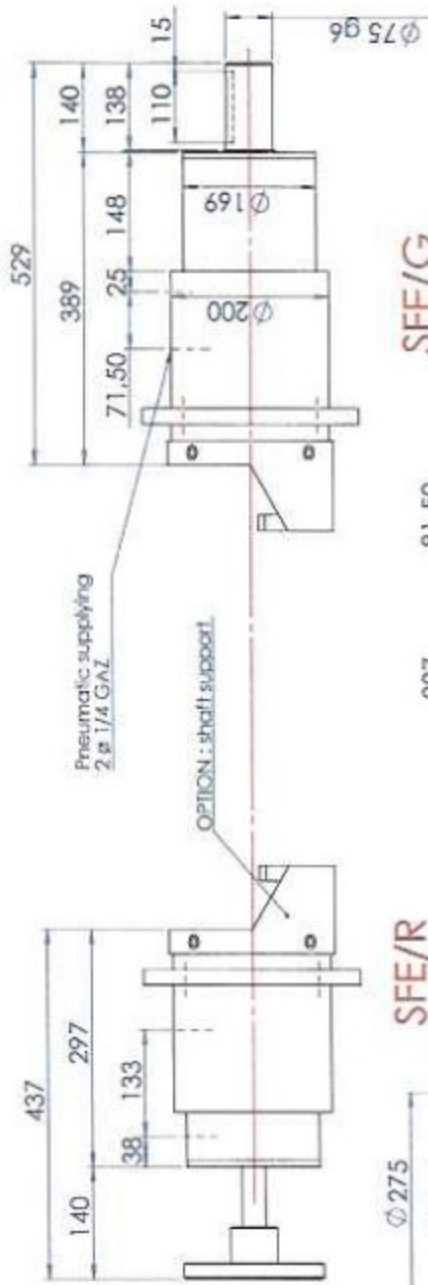


SFE/G

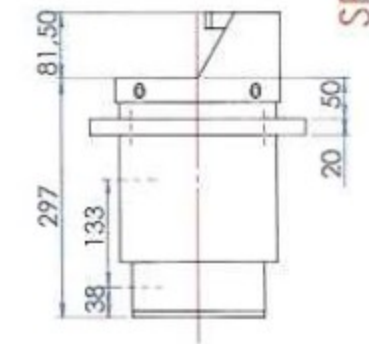

SFE

SFE/R

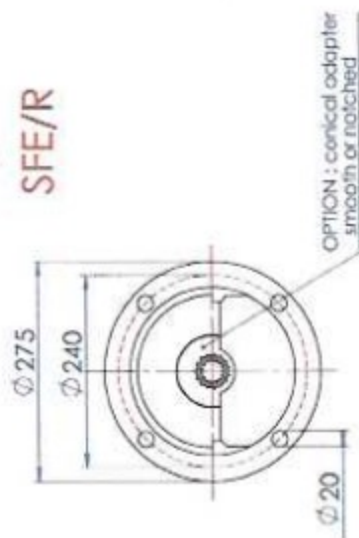


PNEUMATIC SAFETY CHUCK
SERIE 2100 50/80
STROKE 60mm

Rollweight : 72000 N
 Available with stroke 100 mm

MBC
Guttin



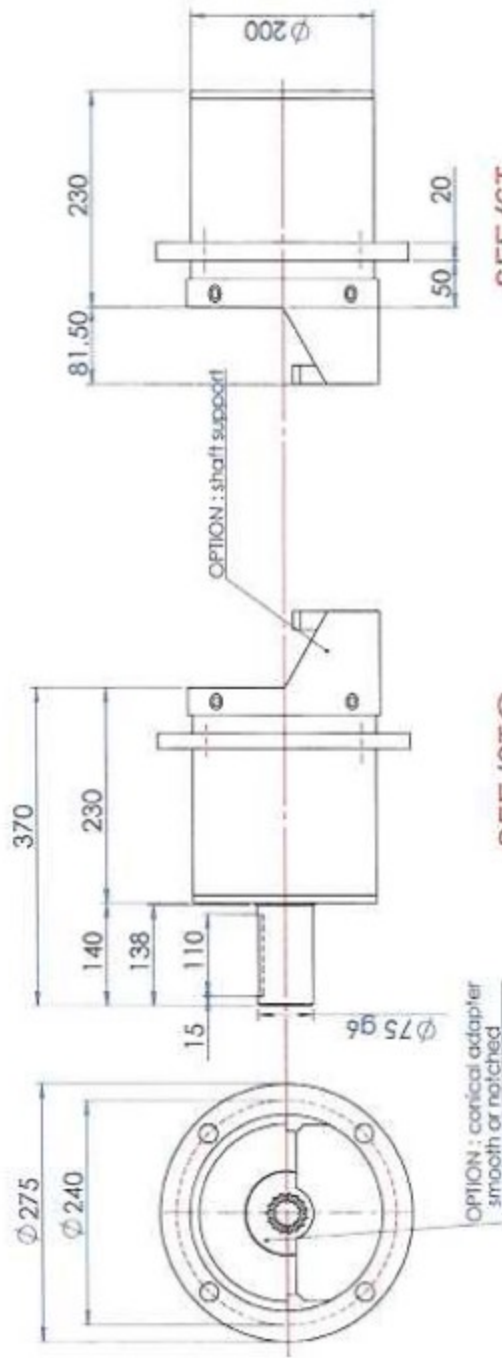

SFE/STG

SFE/ST




SAFETY CHUCK - non Translatory
SERIE 2100 50/80

MBC
Guttin

Rollweight : 72000 N



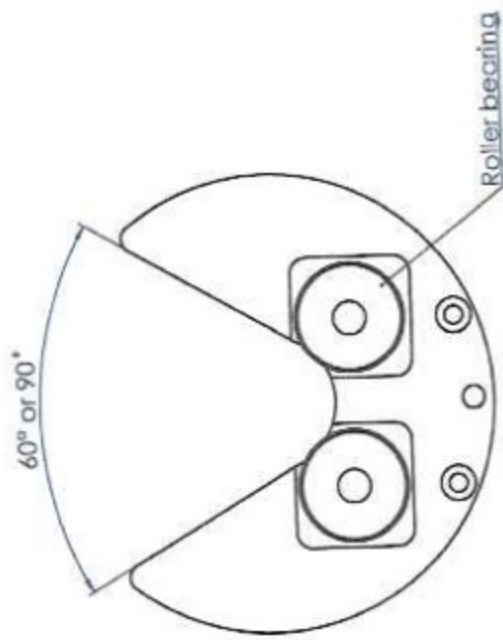

SAFETY CHUCK serie 2000/2100 *MBC*
Guttin
 Shaftsupport type 2

