

BEGA**84 260**

Floodlight

□ IP 65

Project · Reference number

Date

Product data sheet**Application**

Portable Floodlight with earthspike, connecting cable and power plug.
For floodlighting plants, flowers and small woodlands, for walls and other surfaces and for various lighting purposes in the private garden.

Product description

Floodlight made of glass-fibre reinforced polyamide
Clear safety glass
Silicone gasket
Reflector made of pure anodised aluminium
Toolless relamping
No tools are needed to adjust the operating position
Rotation range of floodlight 325°
Swivel range -30°/+70°
Ready for connection with 5 m connecting cable H05RN-F 2×1[□] and mains plug.
Lampholder E 27
Safety class II □
Protection class · power plug IP X4
Protection against splash water
Protection class · luminaire IP 65
Dust tight luminaires and protected against water jets
Impact strength IK07
Protection against mechanical impacts < 2 joule
CE – Conformity mark
Weight: 1.2 kg

Lighting technology

Half beam angle 93°
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website www.bega.com.

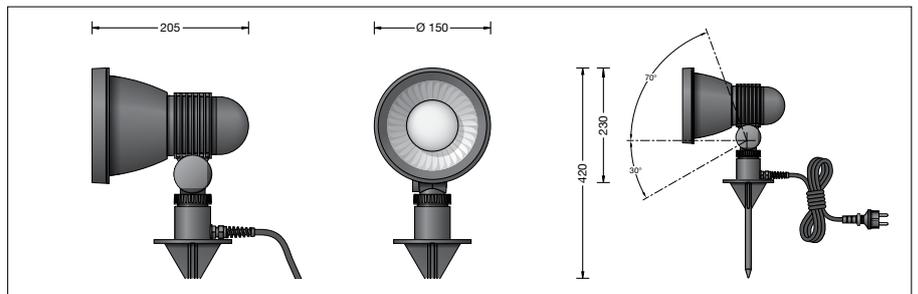
Lamp

Luminaire with lampholder E 27
Lamp output max. 40 W

inclusive BEGA LED lamp 13512

LED 8 W 1055 lm
Colour temperature 2700 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

**Accessories**

For the electrical connection, we recommend the BEGA connecting pillars with safety sockets. You can find them on our website at www.bega.com.

Light distribution