

VAPOR 225

VAPOUR CONTROL MEMBRANE



RELIABLE

The mass per unit area of the membrane provides mechanical strength and protection during construction.

PROTECTION


It is also suitable for applications on uneven and rough supports, which could damage lighter vapour control layers.

COST/PERFORMANCE

Cost-effective membrane, ensuring high performance and protection against weathering.

COMPOSITION

- ① top layer: non-woven PP fabric
- ② middle layer: vapour control PP film
- ③ bottom layer: non-woven PP fabric

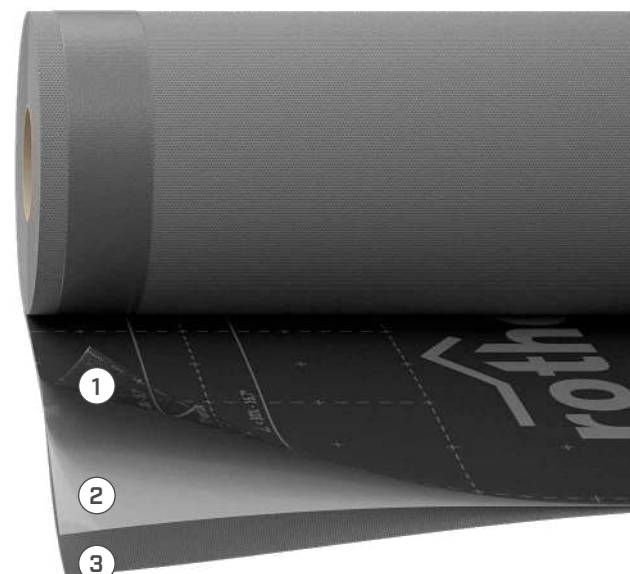

CODES AND DIMENSIONS

CODE	description	tape	H [m]	L [m]	A [m ²]	H [ft]	L [ft]	A [ft ²]	
V225	VAPOR 225	-	1,5	50	75	5	164	807	20
VTT225	VAPOR 225 TT	TT	1,5	50	75	5	164	807	20



SECURE SEALING

The TT version offers fast installation and professional sealing thanks to the integrated double tape.

FLEXIBILITY

Although the membrane is very thick and resistant, its composition ensures great flexibility in processing without the risk of material wear.

TECHNICAL DATA

Properties	standard	value	USC units
Mass per unit area	EN 1849-2	225 g/m ²	0.74 oz/ft ²
Thickness	EN 1849-2	0,8 mm	31 mil
Water vapour transmission (Sd)	EN 1931	4 m	0.87 US Perm
Tensile strength MD/CD	EN 12311-2	> 380/300 N/50 mm	> 43/34 lbf/in
Elongation MD/CD	EN 12311-2	60/80 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 225/300 N	> 51/67 lbf
Watertightness	EN 1928	compliant	-
Water vapour resistance:			
- after artificial ageing	EN 1296/EN 1931	compliant	-
- in the presence of alkalis	EN 1847/EN 12311-2	npd	-
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	< 0,02 m ³ /(m ² h50Pa)	< 0.001 cfm/ft ² at 50Pa
Resistance to temperature	-	-20/80 °C	-4/176 °F
UV stability ⁽¹⁾	EN 13859-1/2	336h (3 months)	-
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 280 kg/m ³	approx. 17 lbm/ft ³
Water vapour resistance factor (μ)	-	approx. 5000	approx. 20 MNs/g
VOC	-	not relevant	-
Water column	ISO 811	> 500 cm	> 197 in

⁽¹⁾ Laboratory ageing test data cannot reproduce unforeseeable causes of the product's degradation, or consider the stresses to which it will be subjected during its service life. To ensure its integrity, as a precautionary measure, exposure to weathering during construction should be limited to a maximum of 4 weeks.

Waste classification (2014/955/EU): 17 02 03.

RELATED PRODUCTS



FLEXI BAND
page 78




NAIL PLASTER
page 134



LIZARD
page 388



MANICA FLEX
page 148

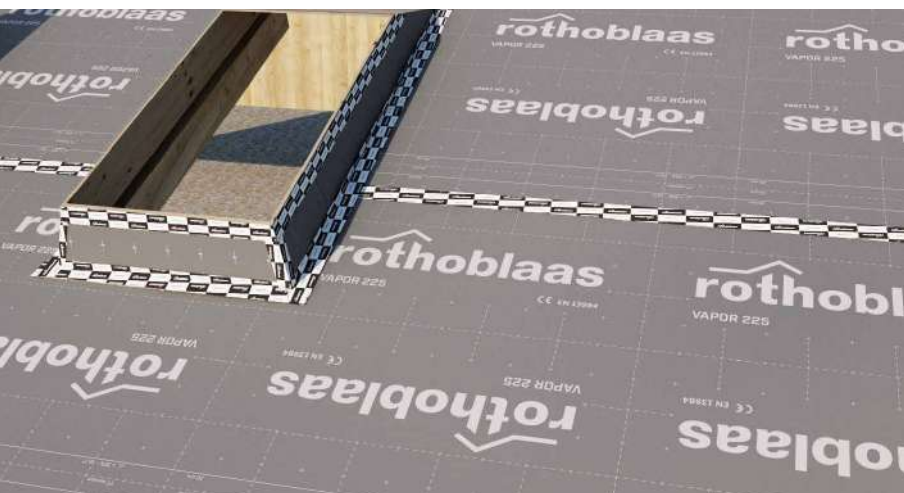

WEAR RESISTANCE

Thanks to its high mass per unit area, it ranks among the most strongest vapour control layers on the market, providing protection for common construction phases.