


Nexum X


50/100 m

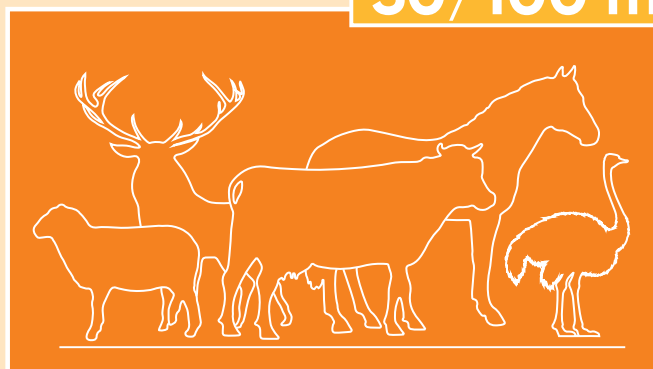

2.5 mm

heavy galvanized

7.5 cm

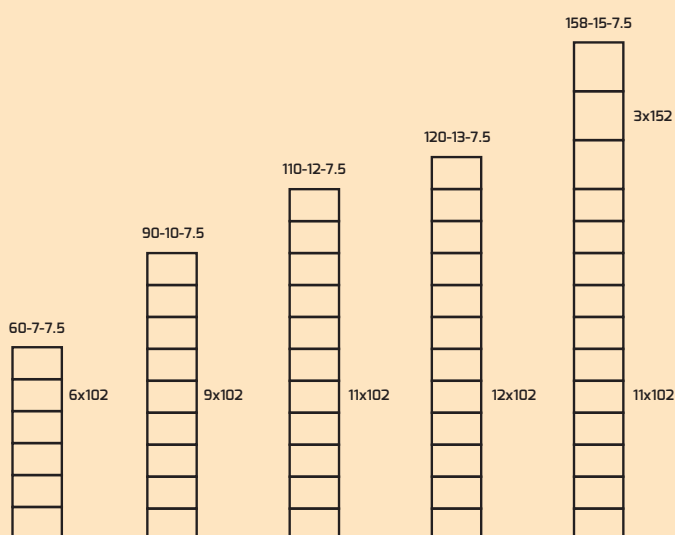

Kop- & voetdraad	2.5 mm
Horizontale draad	2.5 mm
Verticale draad	2.5 mm
Treksterkte	1100/1300 N/mm ²
Zinkbedekking	245 g/m ²
Norm	EN 10218-2 EN 10223-5 EN 10244-2

opbouw	hoogte	lengte	gewicht
60 - 7 - 7.5	60 cm	50 m	34 kg
90 - 10 - 7.5	90 cm	50 m	51 kg
110 - 12 - 7.5	110 cm	50 m	61 kg
110 - 12 - 7.5	110 cm	100 m	122 kg
120 - 13 - 7.5	120 cm	50 m	67 kg
120 - 13 - 7.5	120 cm	100 m	134 kg
158 - 15 - 7.5	158 cm	50 m	81 kg

Natuur|gaas

