


Nexum X

50/100 m




heavy galvanized

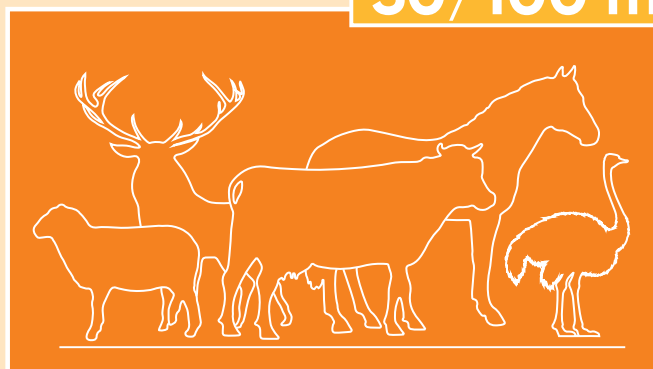

2.5 mm

15 cm

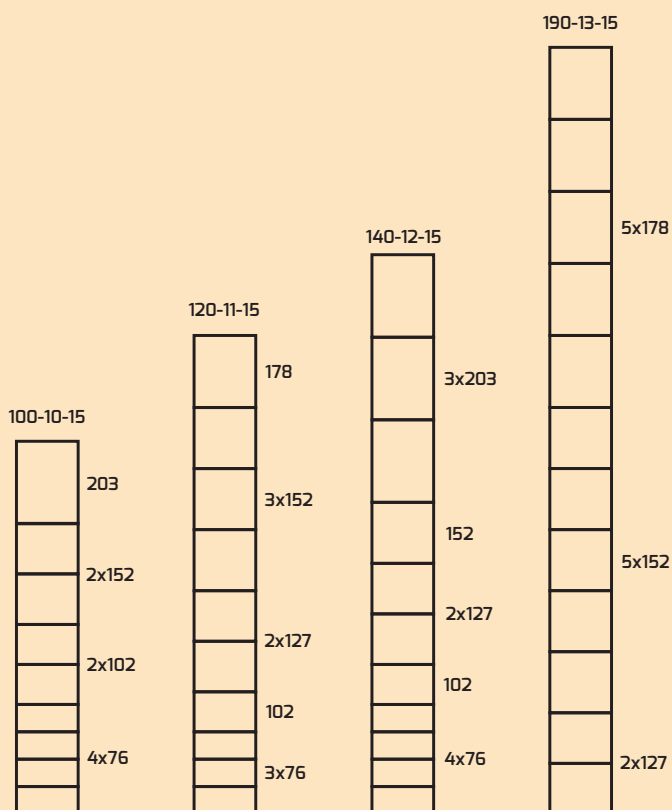

Kop- & voetraad	2.5 mm
Horizontale draad	2.5 mm
Verticale draad	2.5 mm
Treksterkte	1100/1300 N/mm ²
Zinkbedekking	245 g/m ²
Norm	EN 10218-2 EN 10223-5 EN 10244-2

opbouw	hoogte	lengte	gewicht
100 - 10 - 15	100 cm	50 m	36 kg
100 - 10 - 15	100 cm	100 m	72 kg
120 - 11 - 15	120 cm	50 m	41 kg
120 - 11 - 15	120 cm	100 m	82 kg
140 - 12 - 15	140 cm	50 m	44 kg
190 - 13 - 15	190 cm	50 m	55 kg
190 - 13 - 15	190 cm	100 m	110 kg

Natuur|gaas

