

MV-ACU3-MBMs-AM-SF

USB3.0 SUPER FLEX DATA CABLE

The USB3.0 Super Flex Data Cable can be used for data transmission and power supply of USB3.0 interface cameras, and is available in a variety of lengths.




Applicable Camera:

- Hikrobot USB3.0 Interface Area Scan Camera
- Hikrobot USB3.0 Interface Board Level camera

Order Models:

- 3m USB3.0 Super Flex Data Cable : MV-ACU3-MBMs-AM-SF-3m
- 5m USB3.0 Super Flex Data Cable : MV-ACU3-MBMs-AM-SF-5m
- 7m USB3.0 Super Flex Data Cable : MV-ACU3-MBMs-AM-SF-7m
- 10m USB3.0 Super Flex Data Cable: MV-ACU3-MBMs-AM-SF-10m
- 15m USB3.0 Super Flex Data Cable: MV-ACU3-MBMs-AM-SF-15m
- 20m USB3.0 Super Flex Data Cable: MV-ACU3-MBMs-AM-SF-20m

Dimension:

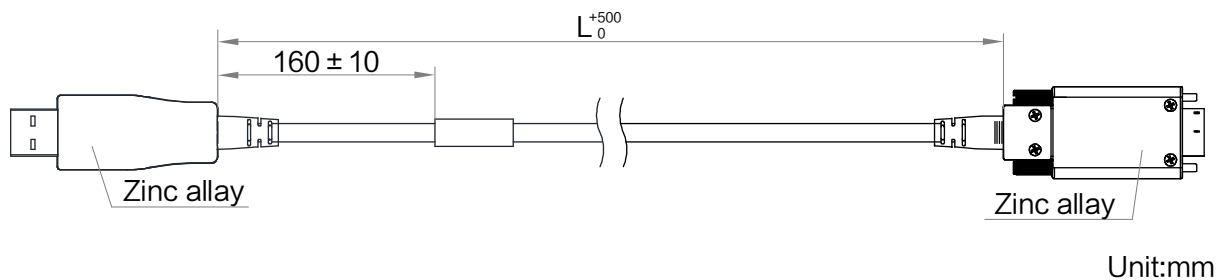

Specification

Specifications	Model	MV-ACU3-MBMs-AM-SF
		USB 3.0 Super Flex Data Cable
Physical specification		
End A connector	Micro-B male (with screw)	
End B connector	A male	
Cable diameter	4.8 mm	
Length	3/5/7/10/15/20 m	
Cable mechanical	(1P*26#+ADBMP)2C+1P*26#+1P*24#+FPB	
Jacket	Nitrile PVC	
Cable color	Black	
Connector durability	5,000 cycles	
Min. bending radius	57.6 mm	
Applicable scenario	Static scenes/tank chain	
Max. U-type bending cycles	10 million times	
Max. ±90° bending cycles	5 million times	
Electrical specification		
Max. voltage	5 VDC	
Additional information		
Working tmperature	-20℃ ~ 80℃	
Certification	RoHS	
Packaging	Individual package	

*Read the user manual for the camera including the precautions before connecting the cable to the camera.