

VSUN320-60M



320W
Highest power output

VSUN320-60M VSUN315-60M VSUN310-60M
VSUN300-60M VSUN305-60M

19.71%
Module efficiency

12years
Material & Workmanship warranty

25years
Linear power output warranty

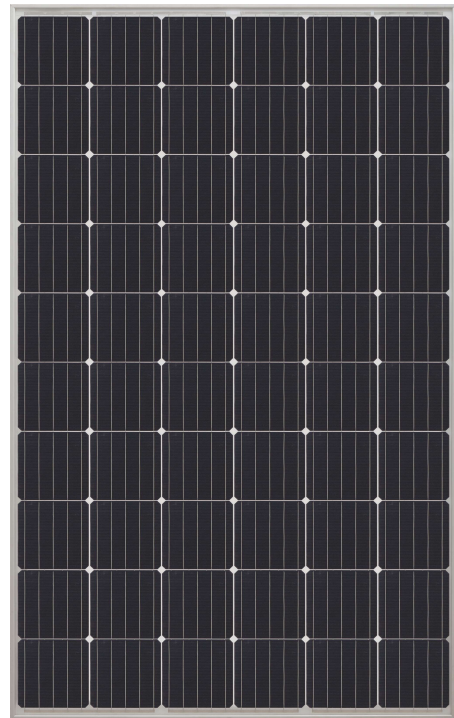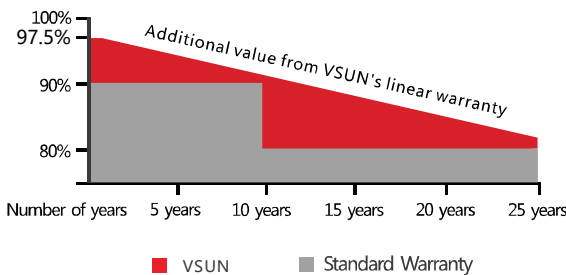

Munich RE 



PID-free



World class mono efficiency



Tighter product performance distribution and current sorting reduces the mismatch power loss in system operation



Positive tolerance offer



Good temperature coefficient enables higher output in high temperature regions



Excellent performance under low light conditions



Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa

VSUN, a BNEF Tier-1 PV module manufacturer invested by Fuji Solar, has been committed to providing greener, cleaner and more intelligent renewable energy solutions. VSUN is dedicated to bringing reliable, customized and high-efficient products into various markets and customers worldwide



Engineered in Japan
www.vsun-solar.com

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN320-60M	VSUN315-60M	VSUN310-60M	VSUN305-60M	VSUN300-60M
Maximum Power - Pmax (W)	320	315	310	305	300
Open Circuit Voltage - Voc (V)	40.6	40.4	40.2	40	39.8
Short Circuit Current - Isc (A)	10.12	10.01	9.92	9.83	9.74
Maximum Power Voltage - Vmpp (V)	33.4	33.2	33	32.8	32.6
Maximum Power Current - Imp (A)	9.59	9.49	9.4	9.3	9.21
Module Efficiency	19.71%	19.40%	19.09%	18.79%	18.48%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; Cell temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	VSUN320-60M	VSUN315-60M	VSUN310-60M	VSUN305-60M	VSUN300-60M
Maximum Power - Pmax (W)	236.7	232.9	229.1	225.6	222
Open Circuit Voltage - Voc (V)	37.6	37.4	37.2	37	36.8
Short Circuit Current - Isc (A)	8.18	8.09	8.02	7.94	7.87
Maximum Power Voltage - Vmpp (V)	30.8	30.7	30.5	30.3	30.1
Maximum Power Current - Imp (A)	7.69	7.59	7.51	7.45	7.37

Normal Operating Cell Temperature(NOCT) : irradiance 800W/m²; wind speed 1 m/s, ambient temperature 20°C. Measuring Tolerance: ±3%.

Temperature Characteristics

NOCT	45°C (±2°C)
Voltage Temperature Coefficient	-0.29%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.39%/°C

Maximum Ratings

Maximum System Voltage [V]	1000
Series Fuse Rating [A]	20

Material Characteristics

Dimensions	1640×990×35mm (L×W×H)
Weight	18.3kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6×10 pieces monocrystalline solar cells series strings (156.75mm×156.75mm)
Junction Box	IP≥67, 3 diodes
Cable&Connector	Length 900 mm, 1×4 mm ² , compatible with MC4

Packaging


Dimensions(L×W×H)	1680×1125×1120mm
Container 20'	372
Container 40'	868
Container 40'HC	938

System Design


Temperature Range	-40 °C to + 85 °C
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s
Maximum Surface Load	5,400 Pa
Application class	class A

Dimensions


Note: mm

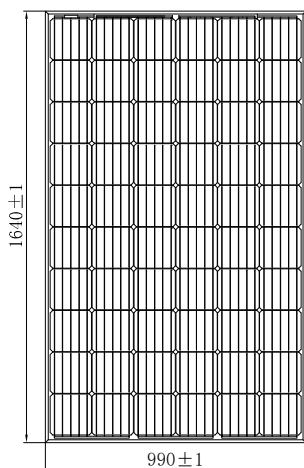


FRONT VIEW

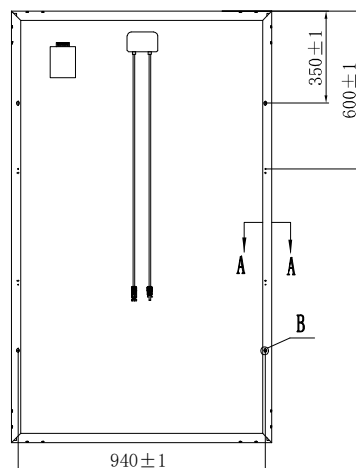



BACK VIEW



B-Mounting Hole
4 place



IV-Curves

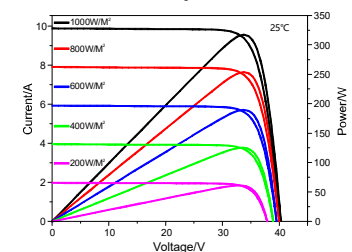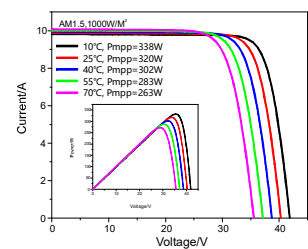

Excellent performance under weak light condition.