

VSUN405-108BMH-DG

405W

Highest power output

20.74%


Module efficiency

12years

Material & Workmanship warranty

30years

Linear power output warranty

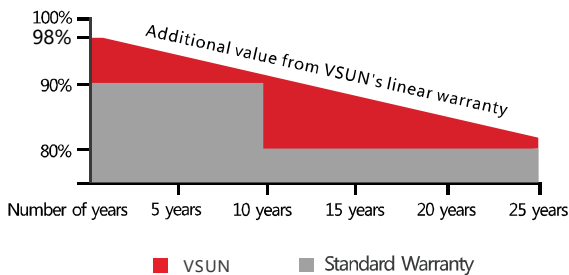

Munich RE



MBB technology with Circular Ribbon



Higher output power



Half-cell Technology



Positive tolerance offer



Micro Gap



Up to 30% extra power generation yield from the back side




Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa



Lower LCOE

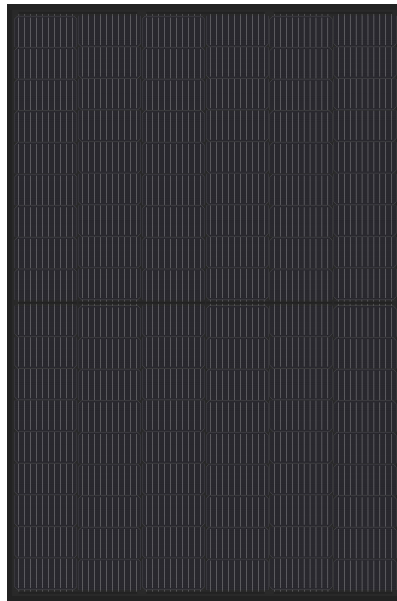

VSUN405-108BMH-DG
VSUN395-108BMH-DG

VSUN400-108BMH-DG
VSUN390-108BMH-DG

VSUN, a BNEF Tier-1 PV module manufacturer invested by Fuji Solar, has been committed to providing greener, cleaner and more intelligent renewable energy solutions. VSUN is dedicated to bringing reliable, customized and high-efficient products into various markets and customers worldwide

Electrical Characteristics at Standard Test Conditions(STC)

| Module Type | VSUN405-108BMH-DG | VSUN400-108BMH-DG | VSUN395-108BMH-DG | VSUN390-108BMH-DG |
|----------------------------------|-------------------|-------------------|-------------------|-------------------|
| Maximum Power - Pmax (W) | 405 | 400 | 395 | 390 |
| Open Circuit Voltage - Voc (V) | 37.36 | 37.2 | 37.03 | 36.84 |
| Short Circuit Current - Isc (A) | 13.78 | 13.68 | 13.59 | 13.5 |
| Maximum Power Voltage - Vmpp (V) | 31.36 | 31.17 | 31 | 30.82 |
| Maximum Power Current - Imp (A) | 12.92 | 12.84 | 12.75 | 12.66 |
| Module Efficiency | 20.74% | 20.48% | 20.23% | 19.97% |

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Electrical Characteristics with different rear side power gain(reference to 400 front)

| Pmax (W) | Voc (V) | Isc (A) | Vmpp (V) | Imp (A) | Pmax gain |
|----------|---------|---------|----------|---------|-----------|
| 420 | 37.1 | 14.36 | 31.17 | 13.48 | 5% |
| 440 | 37.1 | 15.05 | 31.17 | 14.12 | 10% |
| 479 | 37.2 | 16.42 | 31.12 | 15.41 | 20% |
| 499 | 37.2 | 17.10 | 31.12 | 16.05 | 25% |

Temperature Characteristics

| | | | |
|---------------------------------|------------|----------------------------|---------|
| NOCT | 45°C(±2°C) | Maximum System Voltage [V] | 1500 |
| Voltage Temperature Coefficient | -0.27%/°C | Series Fuse Rating [A] | 30 |
| Current Temperature Coefficient | +0.048%/°C | Bifaciality | 70%±10% |
| Power Temperature Coefficient | -0.32%/°C | | |

Maximum Ratings

Material Characteristics

| | |
|--------------------|--|
| Dimensions | 1722×1134×30mm (L×W×H) |
| Weight | 24.7kg |
| Frame | Black anodized aluminum profile |
| Front Glass | AR-Coating Semi-toughened glass, 2.0mm |
| Cell Encapsulation | EVA or POE |
| Back Glass | Black glazed & Semi-toughened glass, 2.0mm |
| Cells | 12×9 pieces monocrystalline solar cells series strings |
| Junction Box | IP68, 3 diodes |
| Cable&Connector | Potrait: 500 mm (cable length can be customized) , 1×4 mm ² , compatible with MC4 |


Packaging

| | | | |
|-------------------|--------------------------|----------------------|---|
| Dimensions(L×W×H) | 1760×1125×1253mm | Temperature Range | -40 °C to + 85 °C |
| Container 20' | 210 | Withstanding Hail | Maximum diameter of 25 mm with impact speed of 23 m/s |
| Container 40' | 455 | Maximum Surface Load | 5,400 Pa |
| Container 40'HC | 910 or 735 (only for US) | Application class | class A |

System Design

Dimensions

Note: mm

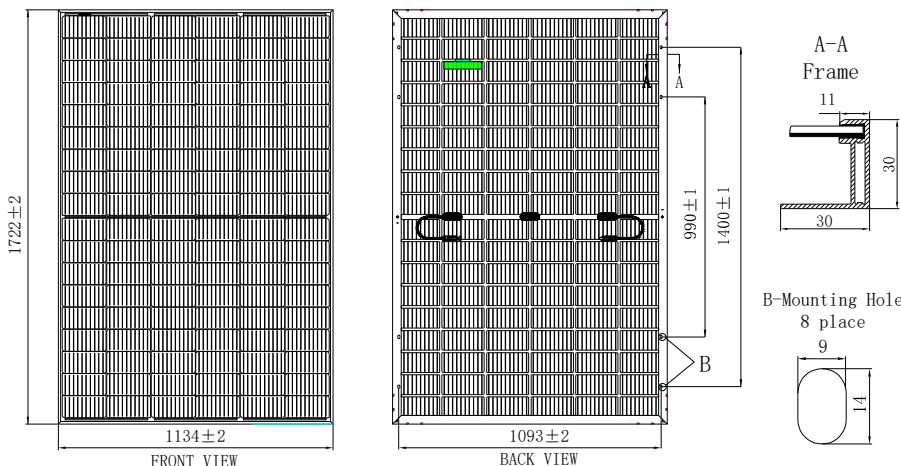

IV-Curves

