


MOD 3000-9000TL3-HU

- Battery ready, future proof
- Dual MPP trackers for stable operation
- Integrated backup function without backup box
- Support accurate AFCI protection
- Reliable Type II SPD for both DC and AC side



P O W E R
- I N G O
T O M O -
R R O W O

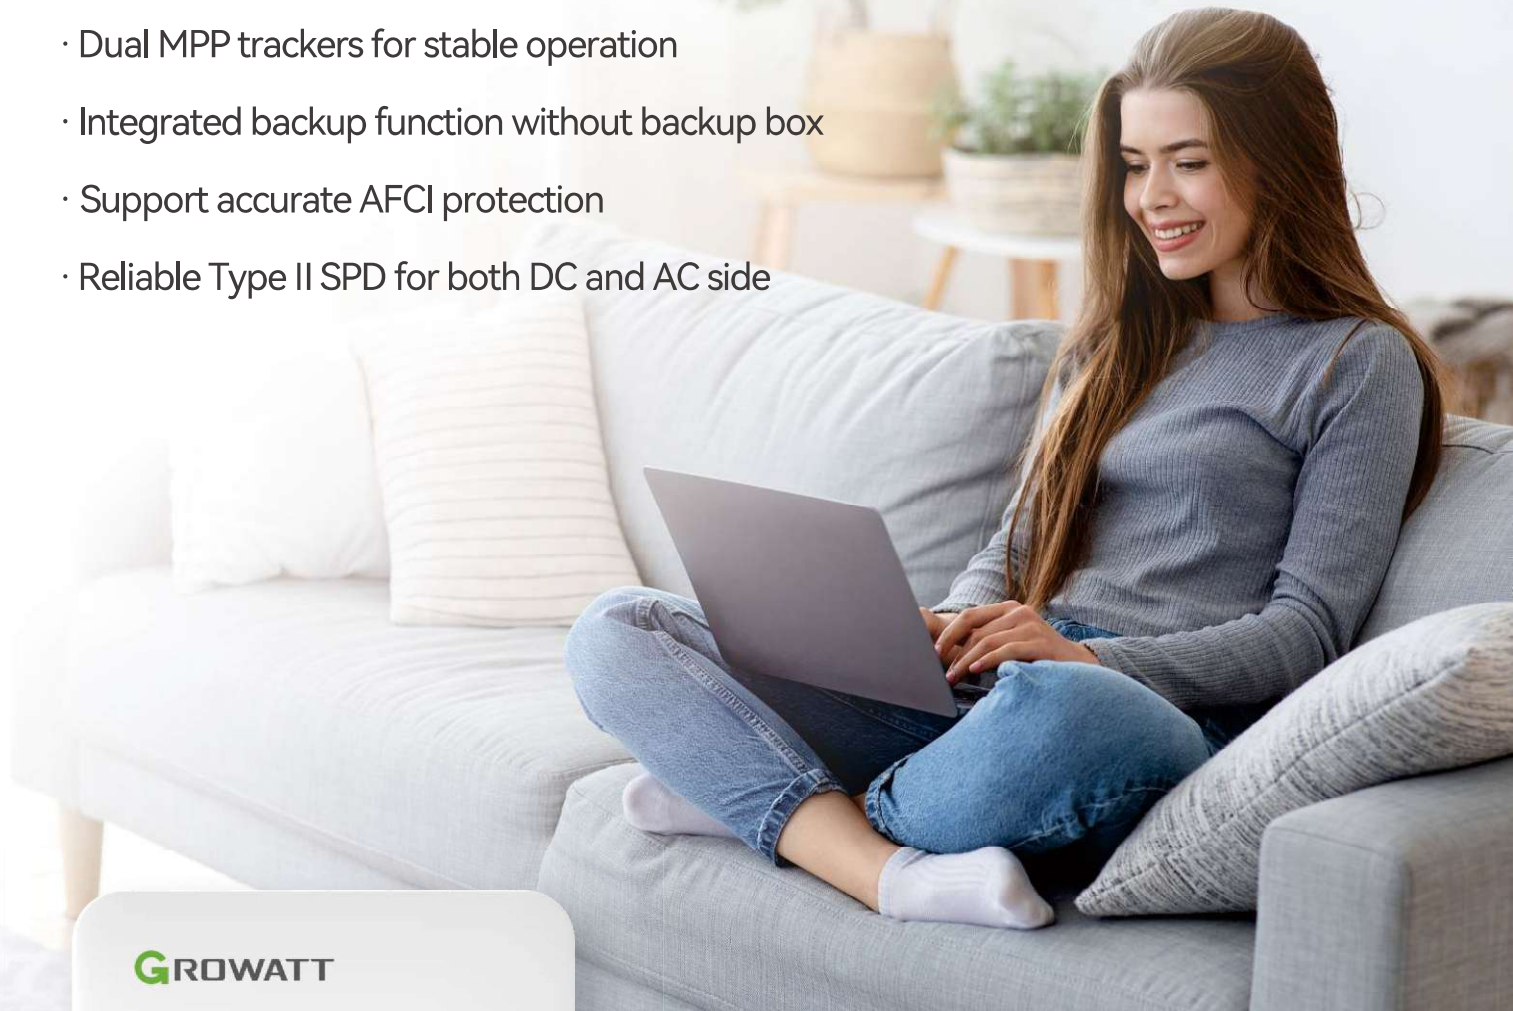

Datasheet	MOD 3000TL3-HU	MOD 4000TL3-HU	MOD 5000TL3-HU	MOD 6000TL3-HU	MOD 7000TL3-HU	MOD 8000TL3-HU	MOD 9000TL3-HU
Input data (DC)							
Max. recommended PV power (for module STC)	6000W	8000W	10000W	12000W	14000W	16000W	18000W
Max. DC voltage				1000V			
Start voltage				160V			
Nominal DC voltage				600V			
MPPT voltage range				140V~1000V			
No. of MPP tracker				2			
No. of PV string per MPP tracker				1			
Max. input current per MPP tracker				20A			
Max. short-circuit current per MPP tracker				25A			
Output data (AC)							
AC nominal power	3000W	4000W	5000W	6000W	7000W	8000W	9000W
Max. AC apparent power	3300VA	4400VA	5500VA	6600VA	7700VA	8800VA	9900VA
Nominal AC voltage	220V/380V, 230V/400V						
AC grid frequency (range)	50/60Hz (45~55Hz/55~65Hz)						
Max. output current	5.0A	6.7A	8.3A	10.0A	11.7A	13.3A	15.0A
Adjustable power factor	0.8leading...0.8lagging						
THDi	<3%						
AC grid connection type	3W+N+PE/3W+PE						
Battery data (DC)							
Compatible battery	APX 5.0~30.0P-S2						
Operating voltage range	600~980V						
Max. operating current	25A						
Max. discharge power	3kW	4kW	5kW	6kW	7kW	8kW	9kW
Max. charge power	9kW	12kW	15kW	15kW	15kW	15kW	15kW
Backup output (AC)							
AC nominal power	3kW	4kW	5kW	6kW	7kW	8kW	9kW
Peak output apparent power	3.6kVA @10min	4.8kVA @10min	6kVA @10min	7.2kVA @10min	8.4kVA @10min	9.6kVA @10min	10.8kVA @10min
Peak output apparent power on single phase	1kVA	1.33kVA	1.67kVA	2kVA	2.3kVA	2.67kVA	3kVA
Nominal AC voltage	220/380V, 230/400V						
Max. output current	5.5A	7.3A	9.1A	10.9A	12.7A	14.5A	16.4A
AC grid frequency	50/60Hz						
THDv	<3%						
Efficiency							
Max. efficiency	98.30%			98.60%			
European efficiency	97.80%			98.10%			
Protection devices							
DC reverse polarity protection				Yes			
DC switch				Yes			
AC/DC surge protection				Type II			
Insulation resistance monitoring				Yes			
AC short-circuit protection				Yes			
Ground fault monitoring				Yes			
Grid monitoring				Yes			
Anti-islanding protection				Yes			
Residual-current monitoring unit				Yes			
String fault monitoring				Yes			
AFCI protection				Yes			
General data							
Dimensions (W / H / D)				468/408/202mm			
Weight				19kg			
Operating temperature range				-25°C ... +60°C			
Noise level				≤29dB (A)			
Max. operating altitude				4000m			
Nighttime power consumption				< 20W			
Topology				Transformerless			
Cooling				Natural			
Protection degree				IP66			
Relative humidity				0~100%			
DC connection				H4/MC4 (Optional)			
AC connection				Waterproof PG connector+OT terminal			
Display				OLED+LED/WIFI+APP			
Interfaces: RS485/CAN/USB				Yes			
Monitor: WiFi-X/WiLan-X2/Grohome/Shinemaster-X				Optional			
Warranty: 10 years				10 Years			
CE, N4105, EN50549-1, C10/C11, CEI0-21, G98, G99, G100, AS4777							