

(4) 4-way ceiling cassette type (FDTC)

(a) Sound power level

Model FDTC25VH1


(Indoor unit)

Model	FDTC25VH1	
Noise level	Cooling	51 dB(A)
	Heating	52 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Rated capacity value (P-Hi)
------	-----------------------------


× Cooling ○ — Heating

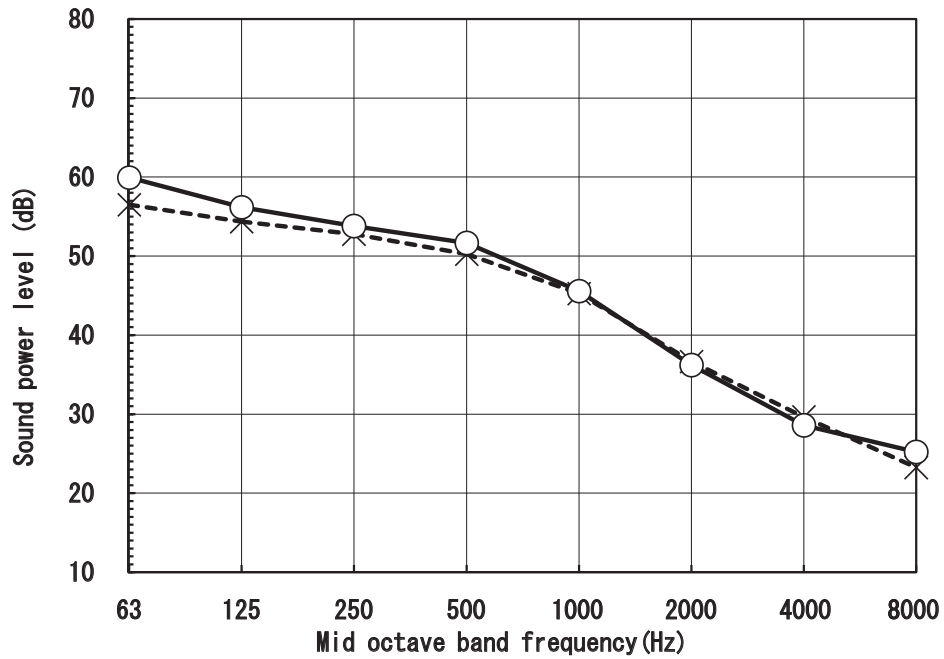

(Outdoor unit)

Model	SRC25ZS-WA2	
Noise level	Cooling	58 dB(A)
	Heating	59 dB(A)

× Cooling ○ — Heating

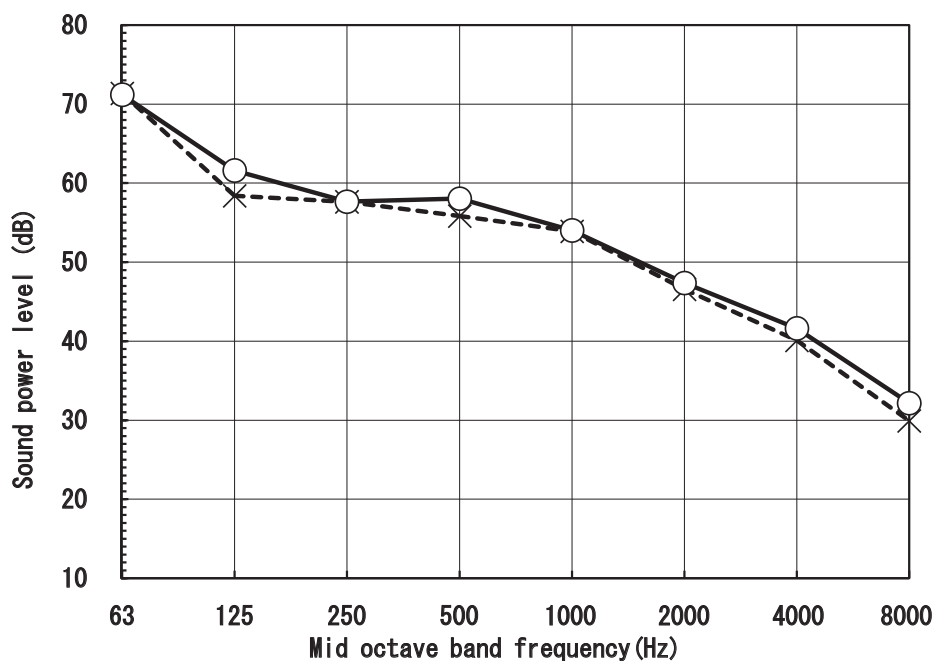

Model FDTC35VH1


(Indoor unit)

Model	FDTC35VH1	
Noise level	Cooling	52 dB(A)
	Heating	53 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Rated capacity value (P-Hi)
------	-----------------------------


× Cooling ○ — Heating

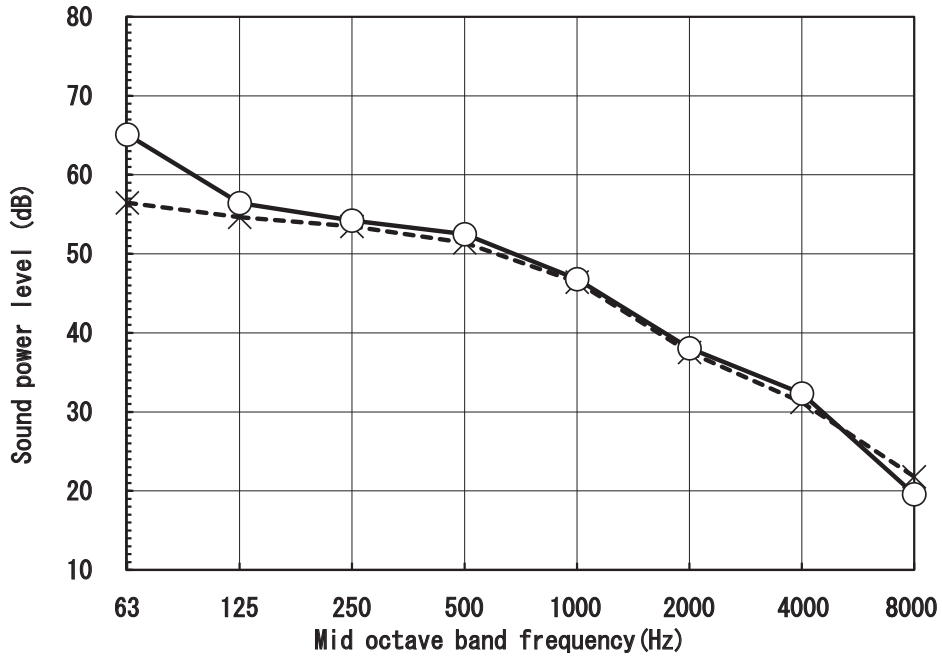

(Outdoor unit)

Model	SRC35ZS-WA2	
Noise level	Cooling	62 dB(A)
	Heating	62 dB(A)

× Cooling ○ — Heating

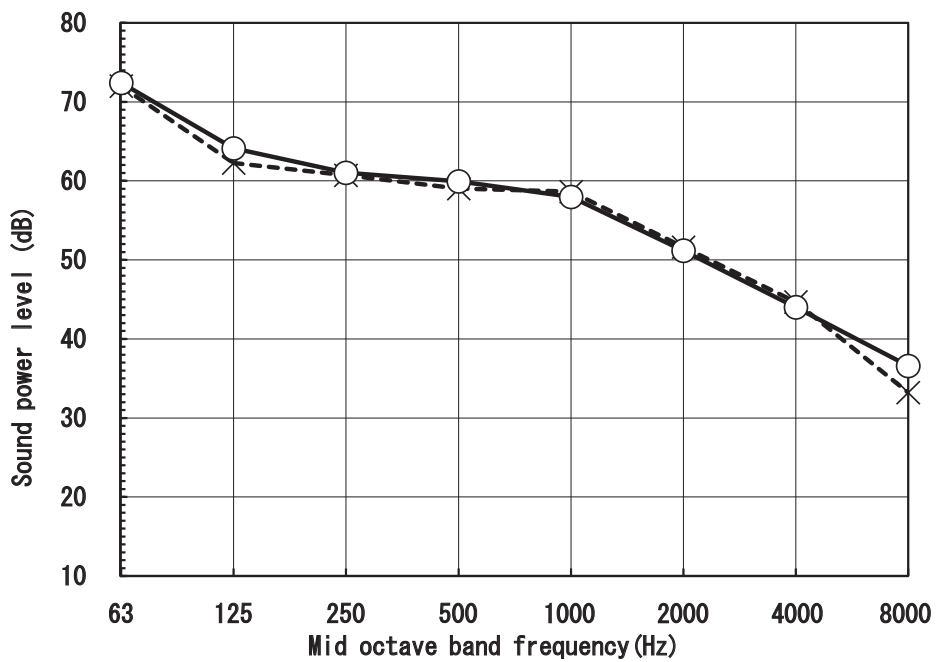

(b) Sound pressure level

(i) Rated capacity value


Model FDTC25VH1

(Indoor unit)


Model	FDTC25VH1	
Noise level	Cooling	38 dB(A)
	Heating	39 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Rated capacity value (P-Hi)
------	-----------------------------




× Cooling ○ — Heating

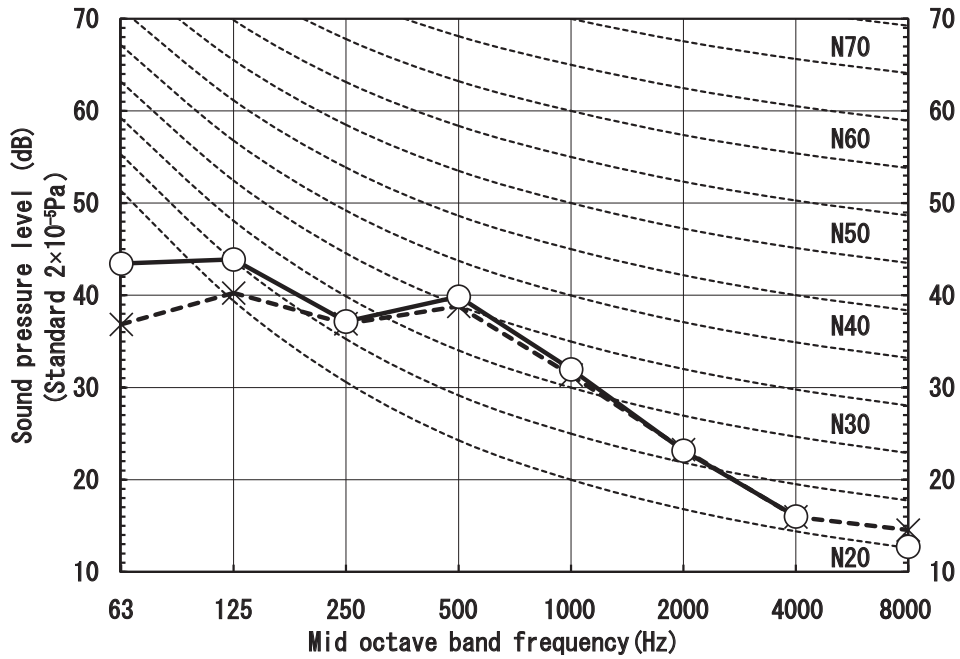

(Outdoor unit)

Model	SRC25ZS-WA2	
Noise level	Cooling	47 dB(A)
	Heating	47 dB(A)

× Cooling ○ — Heating

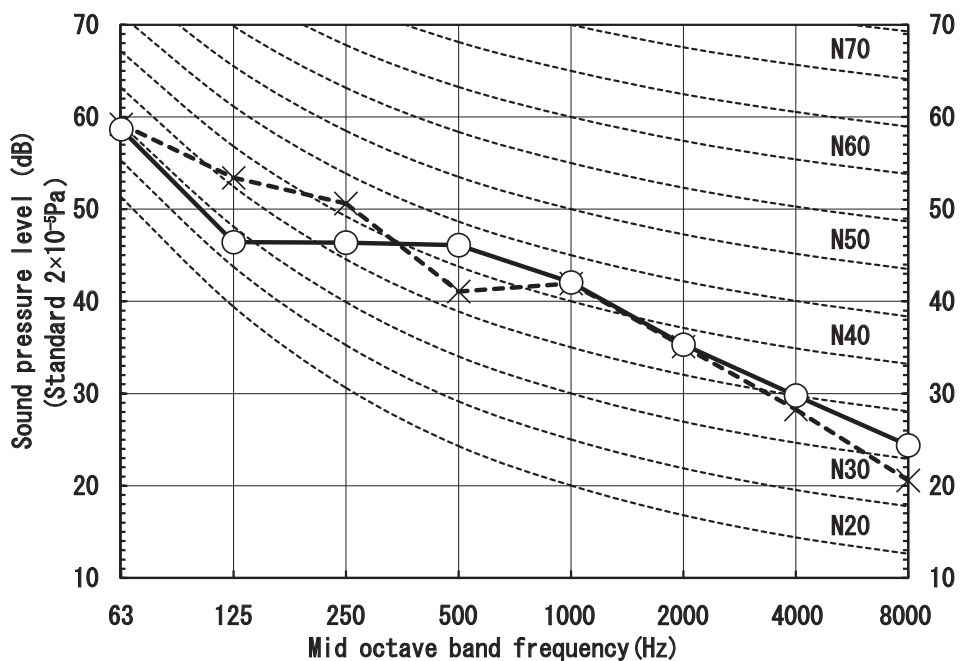


Model FDTC35VH1

(Indoor unit)


Model	FDTC35VH1	
Noise level	Cooling	39 dB(A)
	Heating	41 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Rated capacity value (P-Hi)
------	-----------------------------




× Cooling ○ — Heating

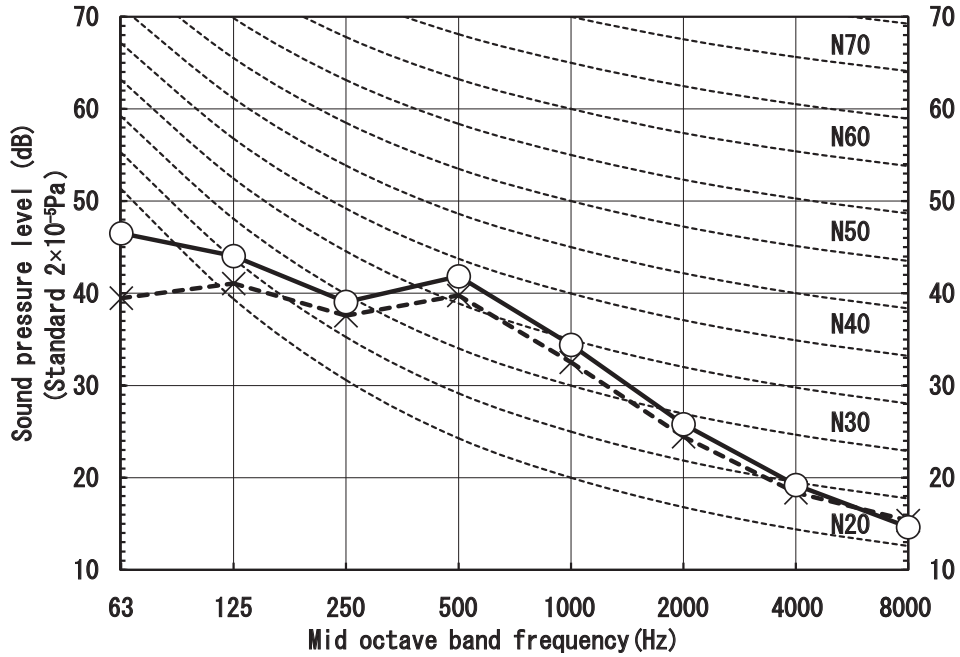

(Outdoor unit)

Model	SRC35ZS-WA2	
Noise level	Cooling	50 dB(A)
	Heating	50 dB(A)

× Cooling ○ — Heating

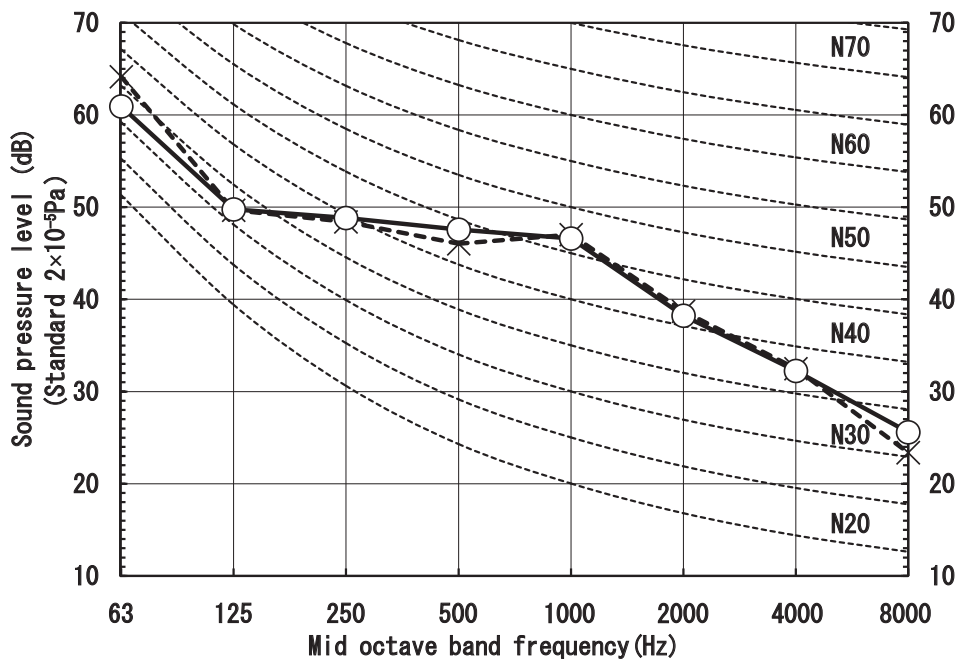

(ii) Each fan speed mode



Model FDTC25VH1

(Indoor unit)

Model	FDTC25VH1	
Noise level	Cooling	34 dB(A)
	Heating	36 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Hi
------	----

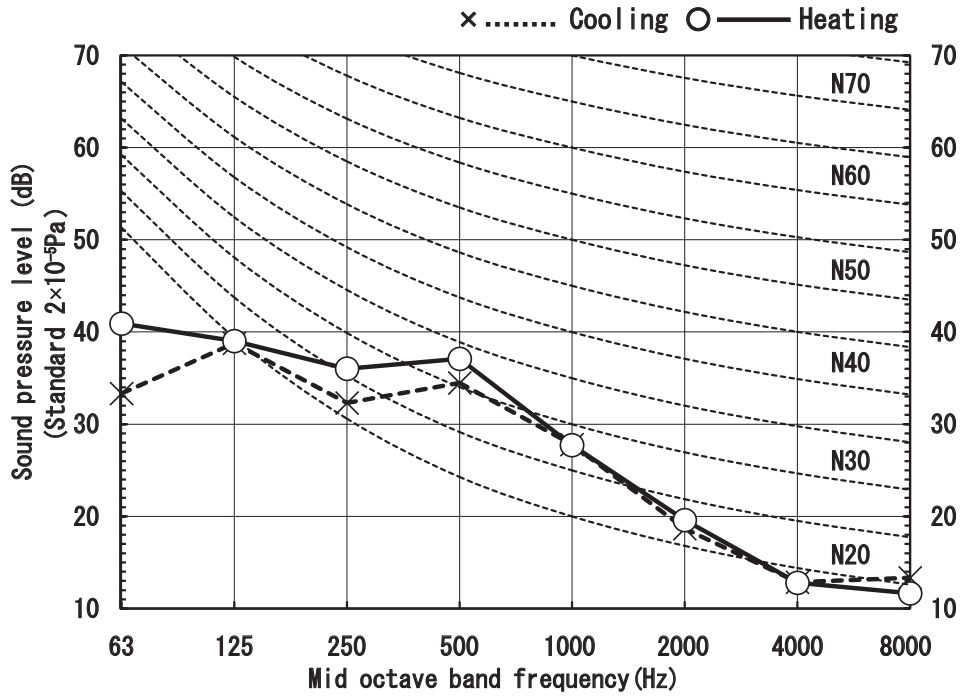



(Indoor unit)

Model	FDTC25VH1	
Noise level	Cooling	30 dB(A)
	Heating	32 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Me
------	----

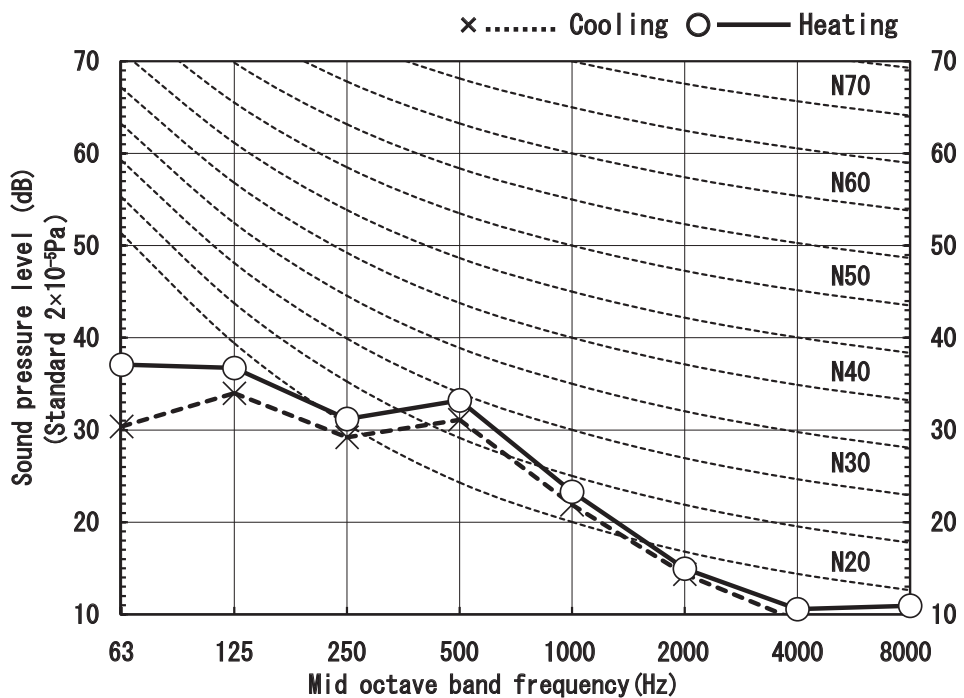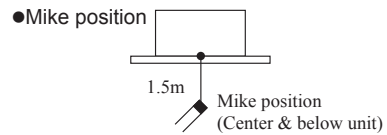


(Indoor unit)


Model	FDTC25VH1	
Noise level	Cooling	27 dB(A)
	Heating	28 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Lo
------	----

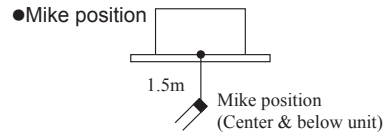

× Cooling ○ — Heating

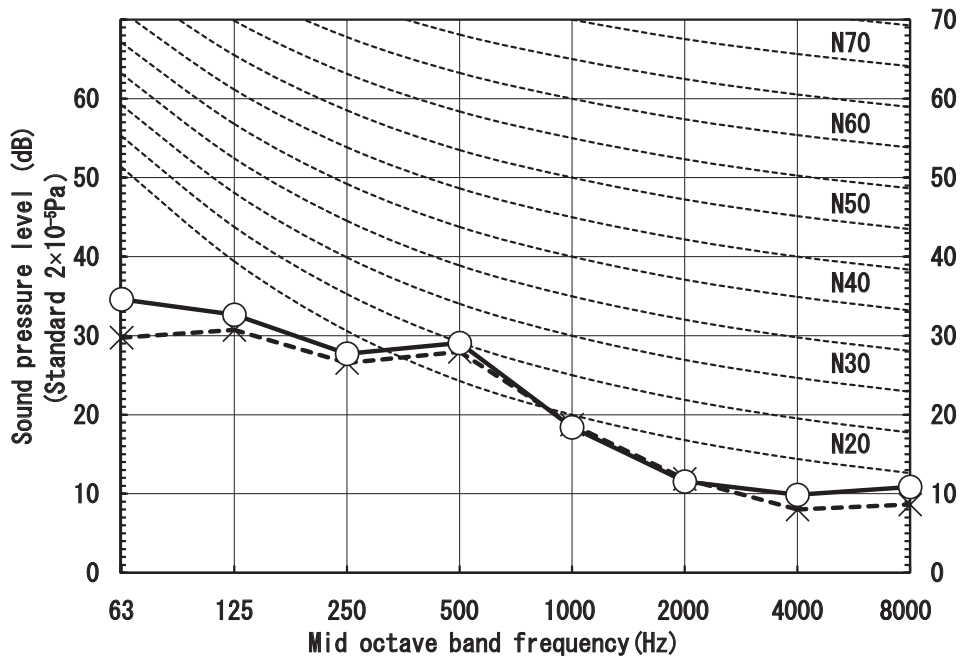


(Outdoor unit)

Model	SRC25ZS-WA2	
Noise level	Cooling	41 dB(A)
	Heating	42 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Silent
------	--------

× Cooling ○ — Heating

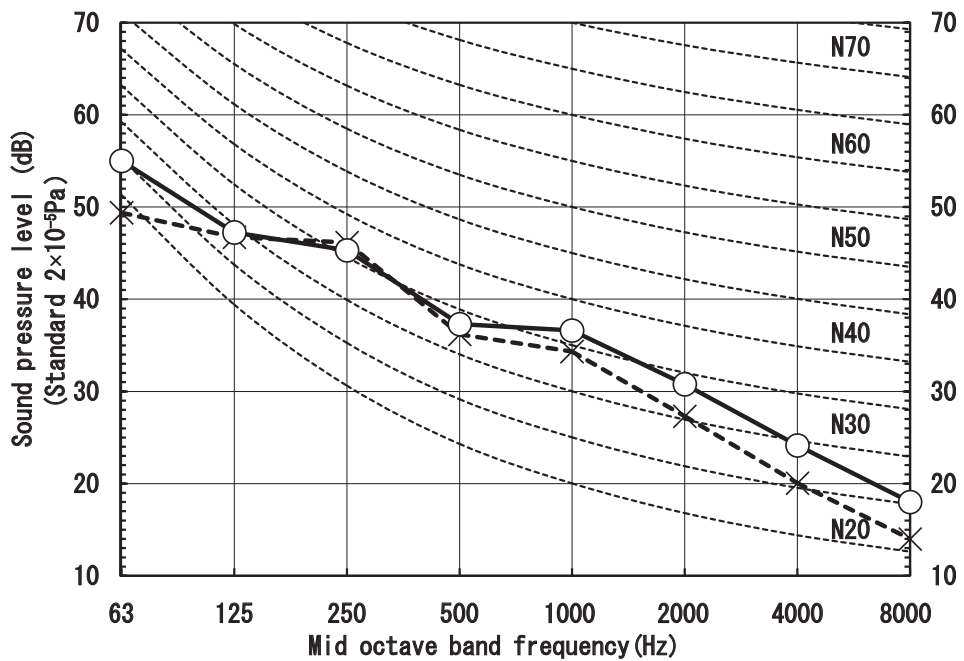



Model FDTC35VH1

(Indoor unit)

Model	FDTC35VH1	
Noise level	Cooling	36 dB(A)
	Heating	38 dB(A)

Condition	IS05151 T1/H1
-----------	---------------

MODE	Hi
------	----

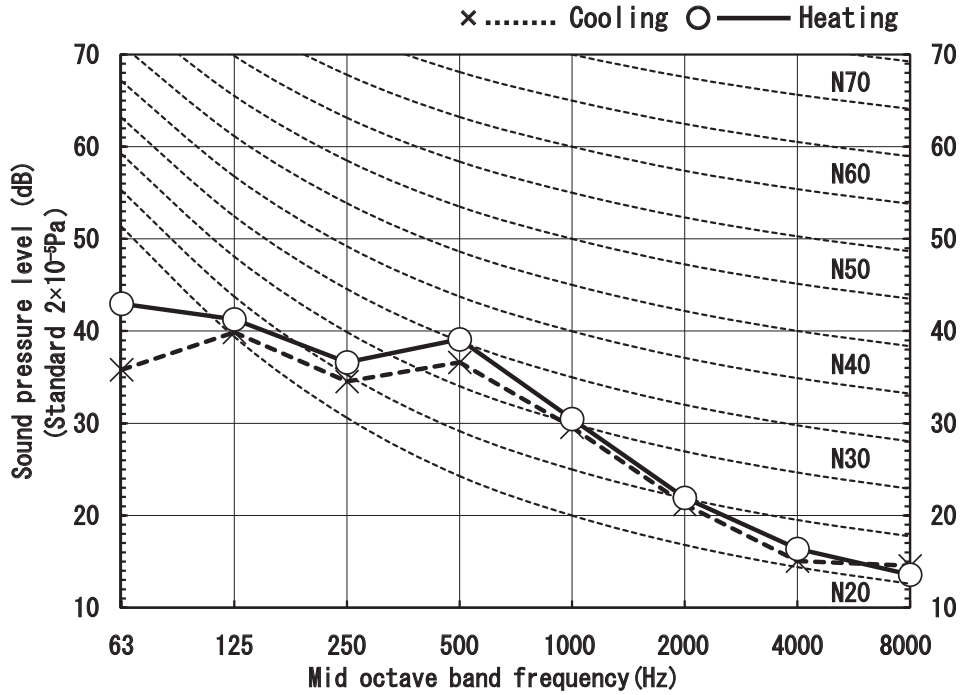
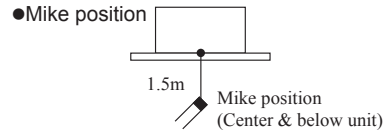


(Indoor unit)

Model	FDTC35VH1	
Noise level	Cooling	32 dB(A)
	Heating	34 dB(A)

Condition	IS05151 T1/H1
-----------	---------------

MODE	Me
------	----

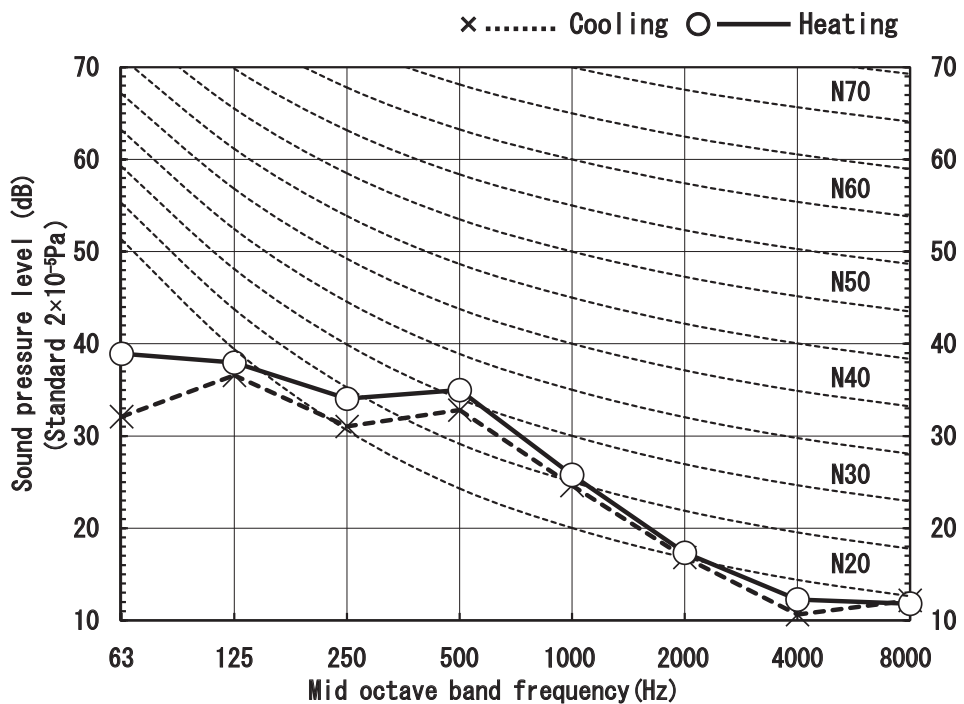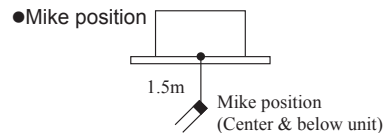


(Indoor unit)


Model	FDTC35VH1	
Noise level	Cooling	29 dB(A)
	Heating	30 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Lo
------	----

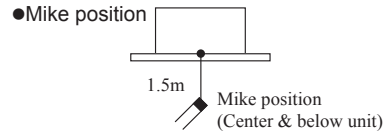

× Cooling ○ — Heating

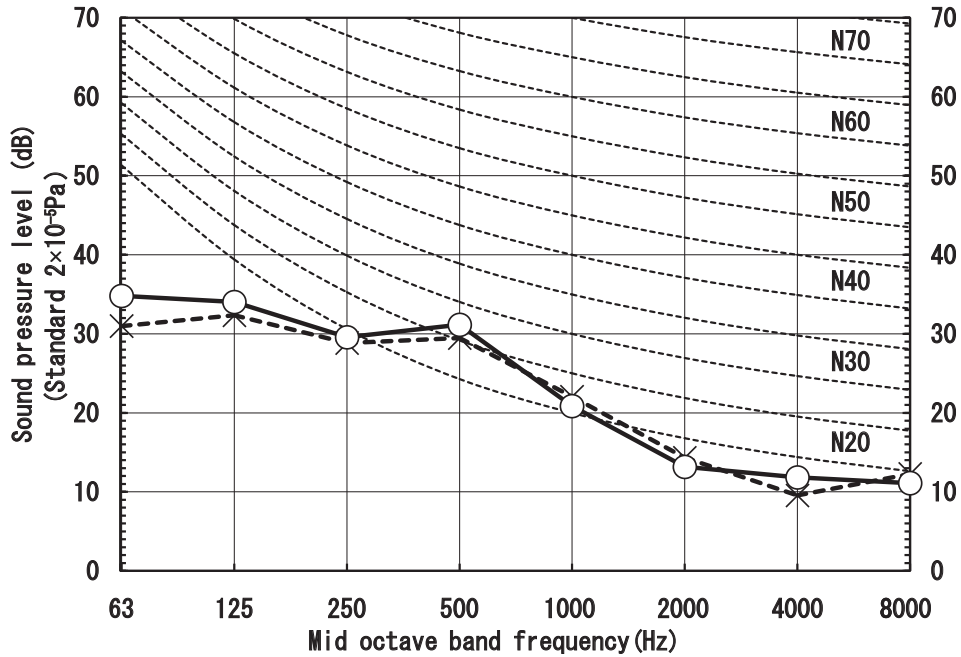

(Outdoor unit)

Model	SRC35ZS-WA2	
Noise level	Cooling	45 dB(A)
	Heating	43 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Silent
------	--------

× Cooling ○ — Heating

