
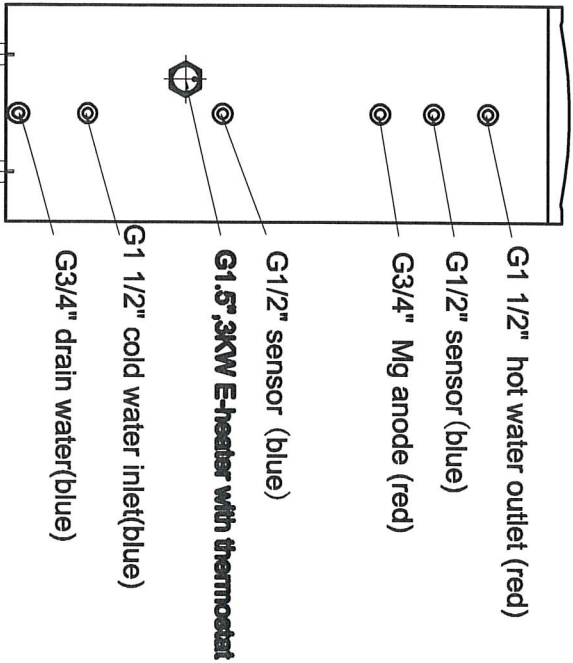
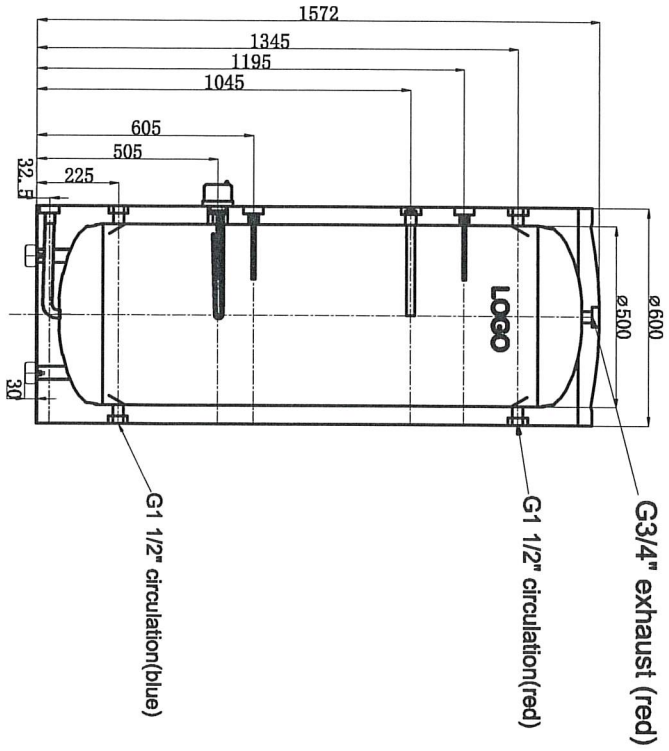


CWT-300L

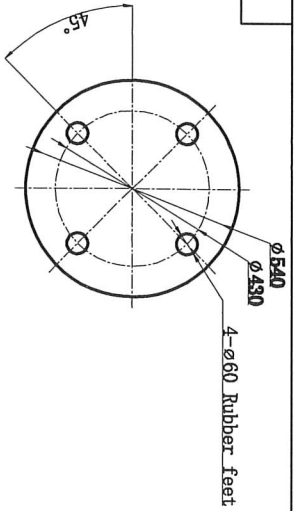

- Technical parameter:**
1. The water tank diameter is $\Phi 600$ mm, outer shell is galvanized sheet with dark grey painting, $\delta = 0.5$ mm, black top cover.
 2. Inner tank diameter is $\Phi 500$ mm, SUS304, $\delta = 1.5$ mm;
 3. All the connectors are female.
 4. The insulation is 50mm polyurethane.

BEIJING ENERGY
 SUPPORT
 11/15/23
 5688 N4 Dirschot
 Postbus 100
 5688 ZJ Dirschot
 T: +31 (0)83 122 07 00

设计	夏球文件号	日期	审核	批准	日期	材料	DATE	20230601
校核	字日期					CWT-300L	版本	1/1
工艺						标准件	比例	1:1
标准化								

SST Heating Energy Co., Ltd