


**CAWTH-300L**

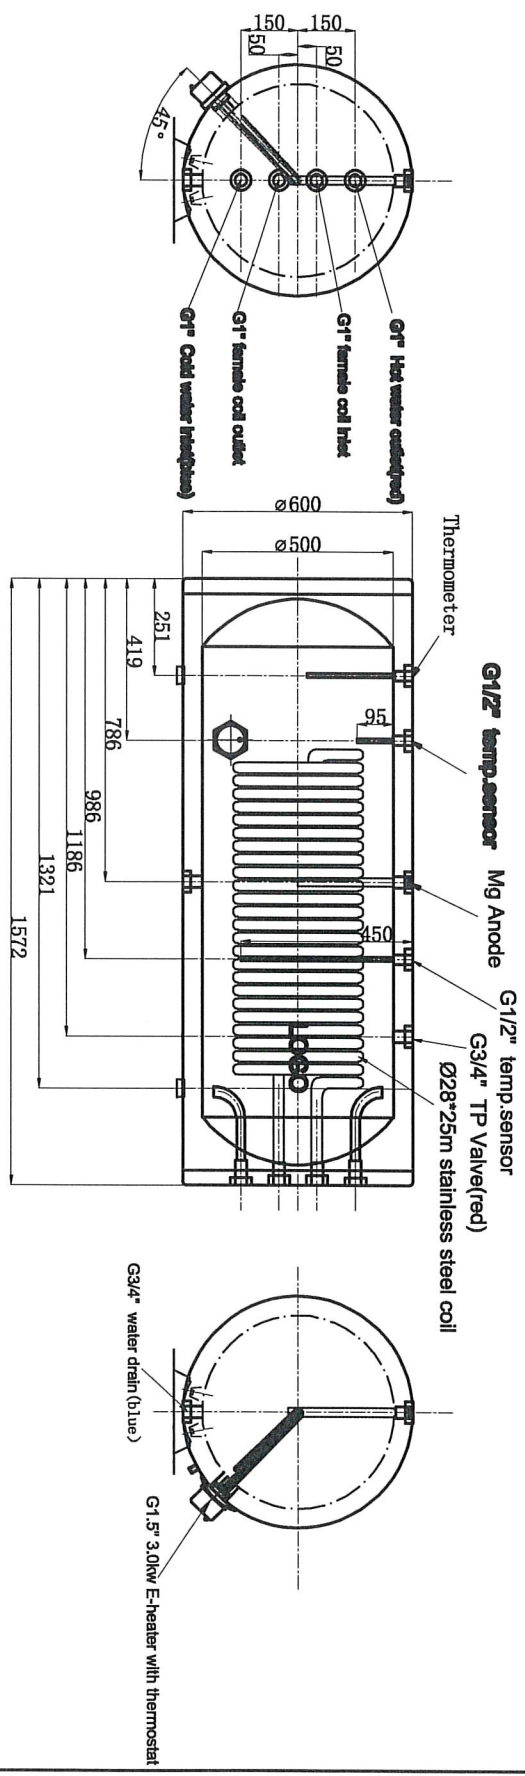

**Technical parameter:**

1. The water tank diameter is  $\Phi 600\text{mm}$ , outer shell is galvanized sheet with dark grey painting,  $\delta=0.5\text{mm}$ , black top covers
2. Inner tank diameter is  $\Phi 500\text{mm}$ , dupler steel 2205,  $\delta=1.0\text{mm}$ ;
3. With SUS316L wave coil  $\Phi 28\text{--}25\text{m}$ , surface area is  $3.3\text{m}^2$ ;
4. All the connectors are female.
5. The insulation is 50mm polyurethane.

*BEIJER REF*  
*1/1/15*  
 Westfields 1210  
 Posibus 100  
 5688 21 Oirschot  
 Tel: +31 (0)88 122 07 00

标题	更改文件号	签字日期	DATE	20230601
设计			版本	1/1
校核			比例	1:1
工艺			材料	Duplex $\delta=1.0\text{mm}$
标准化			材料	Duplex $\delta=1.0\text{mm}$
CAWTH-300L			SST HEATING ENERGY CO., LTD.	