

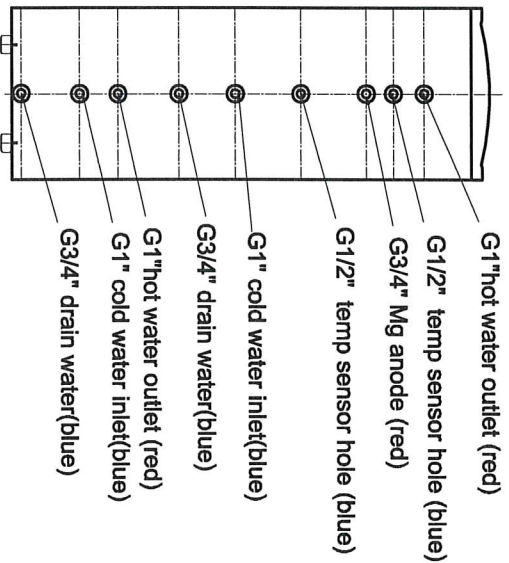
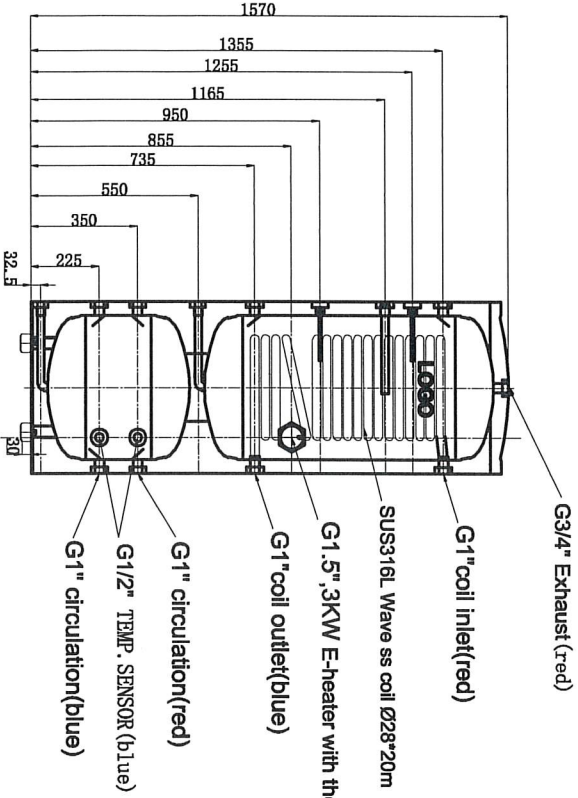


CDWT-215L

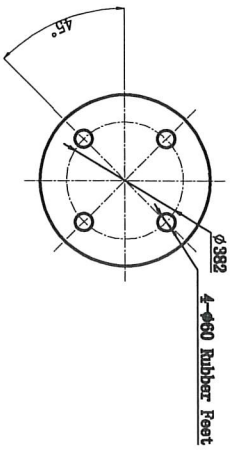

- Technical parameter:
1. The water tank diameter is $\Phi 560\text{mm}$, outer shell is galvanized sheet with dark grey painting, $\delta = 0.5\text{mm}$, black top cover;
 2. Inner tank diameter is $\Phi 470\text{mm}$, duplex steel 2205, $\delta = 1.0\text{mm}$;
 3. With SUS316L wave coil $\phi 28 \times 20\text{m}$, surface area is 2.6m^2 ;
 4. All the connectors are female.
 5. The insulation is 45mm polyurethane.

BEIJER RIKS
 SUPFOR
 Seed fields 1210
 Postbus 100
 5688 ZJ Oirschot
 Tel: 31 (0)83 122 07 00
 3/15/23

标题	更改文件号	签字日期	材料	DATE	20230518
设计			CDWT-215L (150L+65L)	版本	比例
工艺			Duplex, $\delta = 1.0\text{mm}$	A	1:1
标准化				批准	日期
				SST HEATING ENERGY CO., LTD.	