

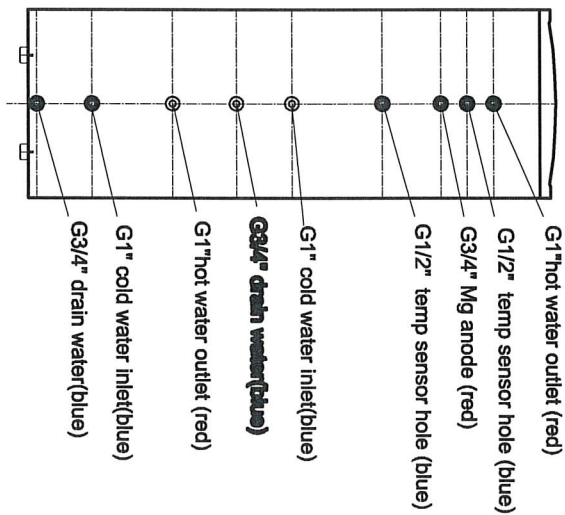


CDWT-500L

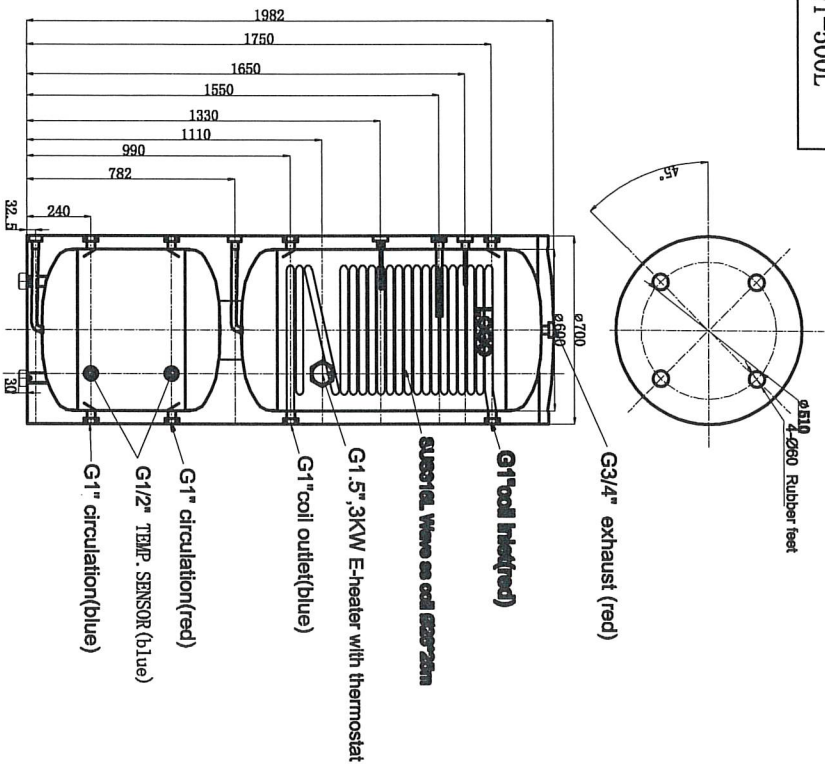

**Technical parameter:**

1. The water tank diameter is  $\Phi 700\text{mm}$ , outer shell is galvanized sheet with dark grey painting,  $\delta=0.5\text{mm}$ , black top cover;
2. Inner tank diameter is  $\Phi 600\text{mm}$ , duplex steel 2205,  $\delta=1.5\text{mm}$ ;
3. With SUS316L wave coil  $\Phi 28 \times 25\text{m}$ , surface area is 3.3  $\text{m}^2$ ;
4. All the connectors are female.
5. The insulation is 50mm polyurethane.



**BEUER**  
SUPPORT

3/15/23

Westfields 12-10  
5688 HA Oirschot  
Postbus 100  
5688 ZJ Oirschot  
Tel: +31 (0)83 122 07 00

原图	更改内容	日期	CDWT-500L (300L+200L)	Date	20230518
设计				版本	1/1
工艺				比例	1:1
审核				SST HEATING EQUIPMENT CO., LTD.	
材料	Duplex 8-1.5mm				