

Index 2



Safety information 2

Content 2











Technical 3

Specifications 3

Installation 4

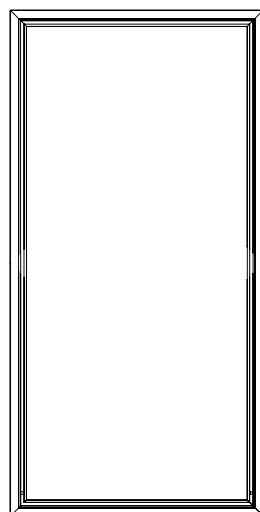


SAFETY INFORMATION




CONTENT

65 x 65 LEDframe




125 x 65 LEDframe




OR


Power supply




+



LEDFRAME 65 x 65 cm



LEDFRAME 125x65

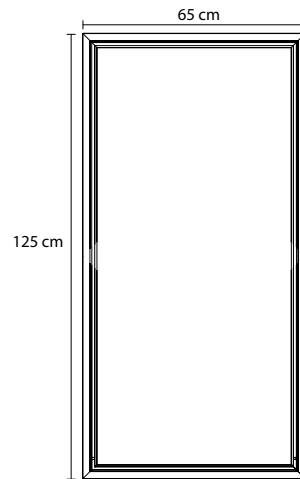

SPECIFICATIONS

LED:	Bridgelux	Weight:	65 x 65 frame: 1,5 kg
Available colours:	CRI>90 : 3000K		125 x 65 frame: 2,3 kg
Optics:	120°	IP value:	IP20
Power supply:	100 ~ 240 VAC	Measurements:	See drawing
Housing:	Aluminium	Ambient temperature:	-10° C till +40° C

! Note: When plugging or unplugging the frames, there must be no power on the LED driver !

