

Frencken

LIJMEN SINDS 1901

Frencken Stripping Spray is a smoothing liquid specially developed for the finishing of Window Frame Adhesive 0819 SLS (3.0 IP). This Spray makes it possible to strip the corner joint easily to give an extra smooth bonding line, and it makes it easy to clean tools.

72127 Bottle 500 ml 6/box 360/pallet

72140 Refill can 5 l 1/piece 60/pallet

Frencken Cleaning Wipes dissolve fresh and uncured adhesive residue on hands, tools, work tables and other surfaces. Contains skin care substances. A safe alternative to White Spirit and other detergents. Frencken Cleaning Wipes are not suitable to prepare surfaces for bonding.

72129 Cartridge 80 st. 6/box 66/pallet



Frencken

LIJMEN SINDS 1901

SPECIALIST IN ADHESIVES FOR
WOOD & PANELMATERIAL



CONTACT

Please contact us if you
have any questions!
sales@frencken1901.nl



Frencken has been a partner since 1901 and specialist in the field of adhesives for wood and panelmaterial. Frencken develops, manufactures and markets adhesives for the market segments construction, carpentry industry, interior flooring and custom industrial applications. Regardless of the complexity of the application, Frencken has or seeks the solution.

950006 - 2016/1

WINDOW FRAME ADHESIVE 0819 SLS 3.0 IP

- Waterproof
- No pressure time
- No foaming, no shrinkage
- 100% filling and sealing
- Gluing dowels with the same adhesive
- Excellent paintability



Existance BRL-standard and Window Frame Adhesive 0819

In 2010 an assessment criterion BRL 0819 'Joining techniques for wooden facades' was concluded to improve the durability of Window Frame joints.

In answer to this BRL assesment criterion Frencken developed **Window Frame Adhesive 0819**.

This adhesive prevents water from entering the wood and completely shuts off the corner joint (main cause of problems). An optimization with respect to the formerly used white PVAc wood adhesive.

- Very fast elastic SMP adhesive
- Waterproof
- No press time
- No foaming, no shrinkage
- 100% filling and sealing
- Gluing dowels with the same adhesive
- Immediate and good paintability
- KOMO certified BRL 0819 (certificate 20942)
- No irritation, no isocyanates

Self Levelling System

During the closing of the joint the **Window Frame Adhesive 0819 SLS** distributes itself evenly throughout the total surface. This method of application shortens the total processing time considerably. There is no need to spread out the adhesive with a brush.



The adhesive must be coated within 3 days with a standard KOMO improved paint system in order to ensure an optimal coating adhesion.*

This adhesive is certified in combination with these types of wood: Meranti, Merbau, Sapupira , Sapeli Mahogany, Iroko, Oregon Pine, Pine/Redwood and Accoya®.

- 1-sided application stripe -wise
- (SLS system) the adhesive distributes itself
- Good paintability between 4-72 uur, de-
- pendant on which paint system is used*


Window Frame Adhesive 0819 SLS			
79020	Cartridge 310 ml	12/box	1248/pallet
79029	Sausage 600 ml	12/box	576/pallet
79024	Hobbock 29 kg	1/piece	16/pallet


* Paint Adhesion Tests of different suppliers can be requested with the paint suppliers.

Window Frame Adhesive 0819 SLS 3.0 IP (Improved Paintability)

The 3th generation Window Frame Adhesive where paintability and workability are optimized.

Window Frame Adhesive 0819 3.0 IP makes it possible to coat the corner joint within 3 days with a standard KOMO improved paint system after bonding. An optimal coating adhesion will be guaranteed.* In addition, the workability is also optimized, no glue threads are drawn in the application.

 This adhesive is certified in combination with these types of wood: Meranti, Merbau, Sapeli Mahogany, Iroko, Pine/Redwood.

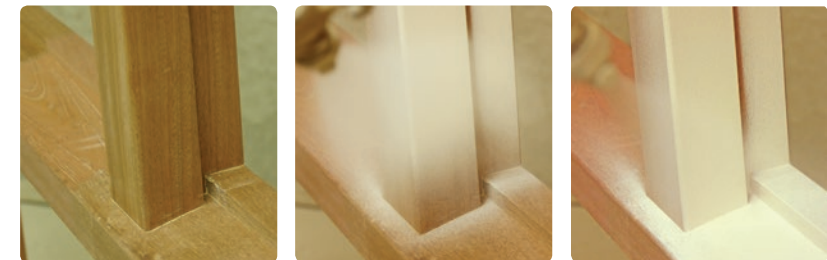

- Paintability upto 72 hours after bonding with a standard KOMO improved paint system.*
- Improved paintability
- Improved workability, no glue threads are drawn

Window Frame Adhesive 0819 SLS 3.0 IP			
79025	Cartridge 310 ml	12/box	1248/pallet
79062	Sausage 600 ml	12/box	576/pallet
79063	Hobbock 29 kg	1/piece	16/pallet

