


Description

- Suitable for explosive environment class II zone 1, 2, class III zone 21, 22 and other professional portable lighting.
- Intrinsically safe explosion-proof design.
- The body is made of high performance nylon. It features as lightweight, anti-aging, anti-corrosion, impact-resistant and easy to carry.
- Professional optical lens design, soft illumination, uniform spot, in line with GB 30734 fire protection standard.

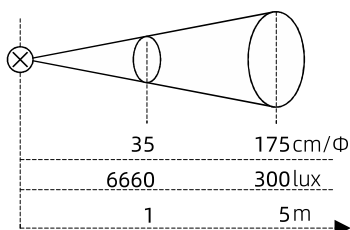

Parameters

Certifications:	IECEX, ATEX
Ex mark:	IECEX: Ex ib IIC T4 Gb; Ex ib IIIB T130°C Db ATEX: Ex II 2 G Ex ib IIC T4 Gb Ex II 2 D Ex ib IIIB T130°C Db
Usage:	II Zone 1/2, and III Zone 21/22
Working ambient temp.:	-20°C≤Ta≤+55°C
Ingress protection:	IP66/67
CCT:	6500K
Luminous flux:	≥410lm (strong mode), ≥210lm (work mode), ≥210lm (SOS mode)
Run time:	≥14h (strong mode), ≥25h (work mode)
Beam distance:	≥164m (strong mode), ≥125m (work mode)
Battery type:	18650 lithium battery (IEC 61233, IEC 61960)
Battery capacity:	7.2V, 6700mAh
Charging way:	matched 1000/01-B51 charging base
Charging time:	≤12h
Recharging cycles:	500 cycles
Lifespan:	50,000h (without battery)
Indicator color:	Red, Yellow, Green, White

Note: The luminous flux and continuous discharge time are the values measured under the environment of -20°C≤Ta≤+55°C.


Features



90° rotational head



Comes with 4 colors light source, switch by knob. ○ ● ● ●

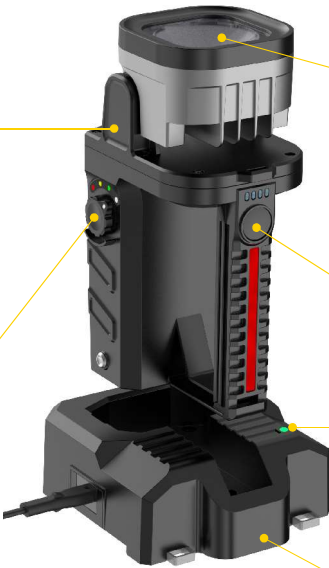

Charging indicator



The head adopts advanced insert over-molding of glass with high performance nylon material.





Large button, designed for industrial use, is made of durable, chemical-resistant nylon. 4 grids power display.



Matched charging base, safer and more reliable.

Order specifications

Illustration	Description	Weight (g)
	Explosion Proof Rechargeable LED Handlamp	960
	Explosion Proof Rechargeable LED Handlamp + Charging base + Power cord	1367

Charging system

- ExMP is equipped with a dedicated charging base to ensure safe use. The charging base has a charging indicator light, red means charging, green means fully charged.
- The charging base has 3 charging ports - AC 100-250V/3A, DC 5.0V/3A and a matched integrated charging port at the bottom. Safe, simple and convenient.
- This product is suitable for type B integrated charging track rail.

Note: For technical parameters of integrated charging track rail and integrated charging stand, please refer to pages 03-05.

DC 5.0V/3A




Individual Charging




AC 100-250V,
50/60Hz

Type B Integrated
Charging Track Rail

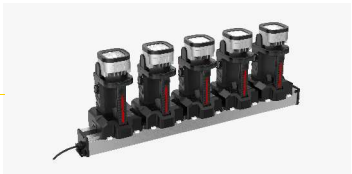

Integrated Charging Stand

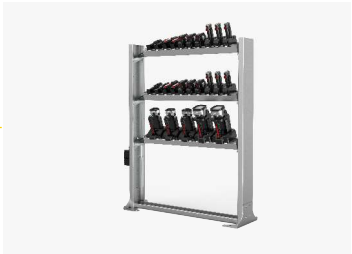



Outline dimension (unit: mm)

