

S.GROUND

STELLA



S.GROUND

LIGHT IN ITS
NATURAL HABITAT.

The S.GROUND series is a landmark for Stella's Outdoor Lighting line. More than simply adding the brand to its name, the initial "S." represents Stella's unique way of creating new lighting experiences through design and technology, taking its signature products to a new technical and functional level.



S.GROUND · LED SPIKE



S.GROUND · LED INGROUND





NATURAL SELECTION HAS COME TO THE LIGHTING MARKET.

Inspired by nature's own evolution, the S.GROUND series was conceived to transform outdoor lighting with its optimal performance. Its advanced project was designed to maintain maximum impermeability, delivering a set of distinguishing features, such as electrical safety, a precise and adjustable light effect and the visual comfort that is always provided by Stella's signature creations.



THE IDEAL LIGHTING, FROM THE GROUND UP.

Composed by LED Spikes and Ingrounds, S.GROUND allows for a stylish and completely efficient outdoor lighting.

There is a wide range of options to highlight each color and texture of your yard, including tall grass areas. A complete series, enlightened by Stella's quality.






YOUR YARD
WILL BE THE
NEIGHBOURHOOD'S
BEST VIEW.



H2OFF.
A NEW NAME FOR
IMPERMEABILITY.

Besides the specially processed glass and the IP67 Protection Index, S.GROUND products have the Block System, an exclusive feature designed by Stella to offer greater impermeability against water infiltration or moisture.

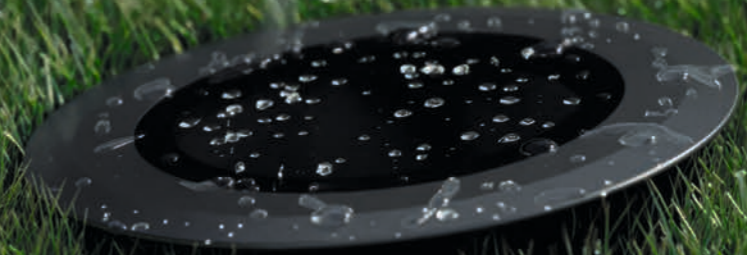



BLOCK SYSTEM.
DOUBLE PROTECTION
AGAINST
WATER'S EFFECTS.



Composed by an Anti-Condensation Device and a High-Density Cable, the Block System offers an enhanced protection against moisture and prevents water infiltration from advancing through the cable to the electric circuit.




ORBITAL INSTALLATION CASING AND ELEVATION RING.
 FLIP TO THE NEXT PAGE AND DISCOVER UNIQUE FEATURES FOR LED INGROUNDS.



Elevation Ring*

360° rotation of the light source and inclining adjustment of up to 15° in every direction.

*Installation accessory, sold separately.

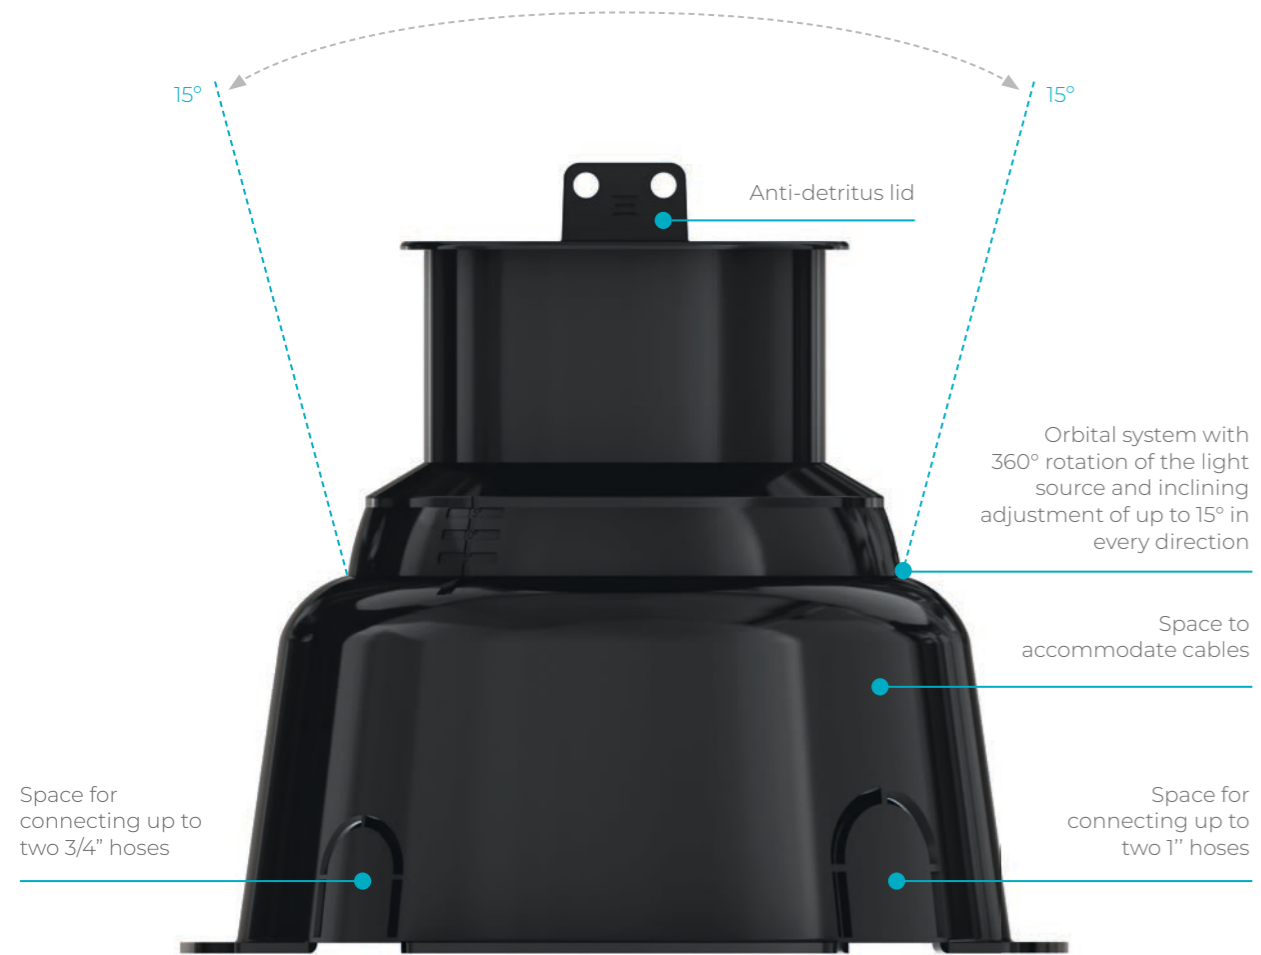

NATURE AND
TECHNOLOGY
IN HARMONY.



SIGNATURE OPTICAL SET.
ORIGINALITY TO BRING YOU THE
UTMOST OF VISUAL COMFORT.






BEAUTY THROUGH DIFFERENT ANGLES.

14° & 36°

297

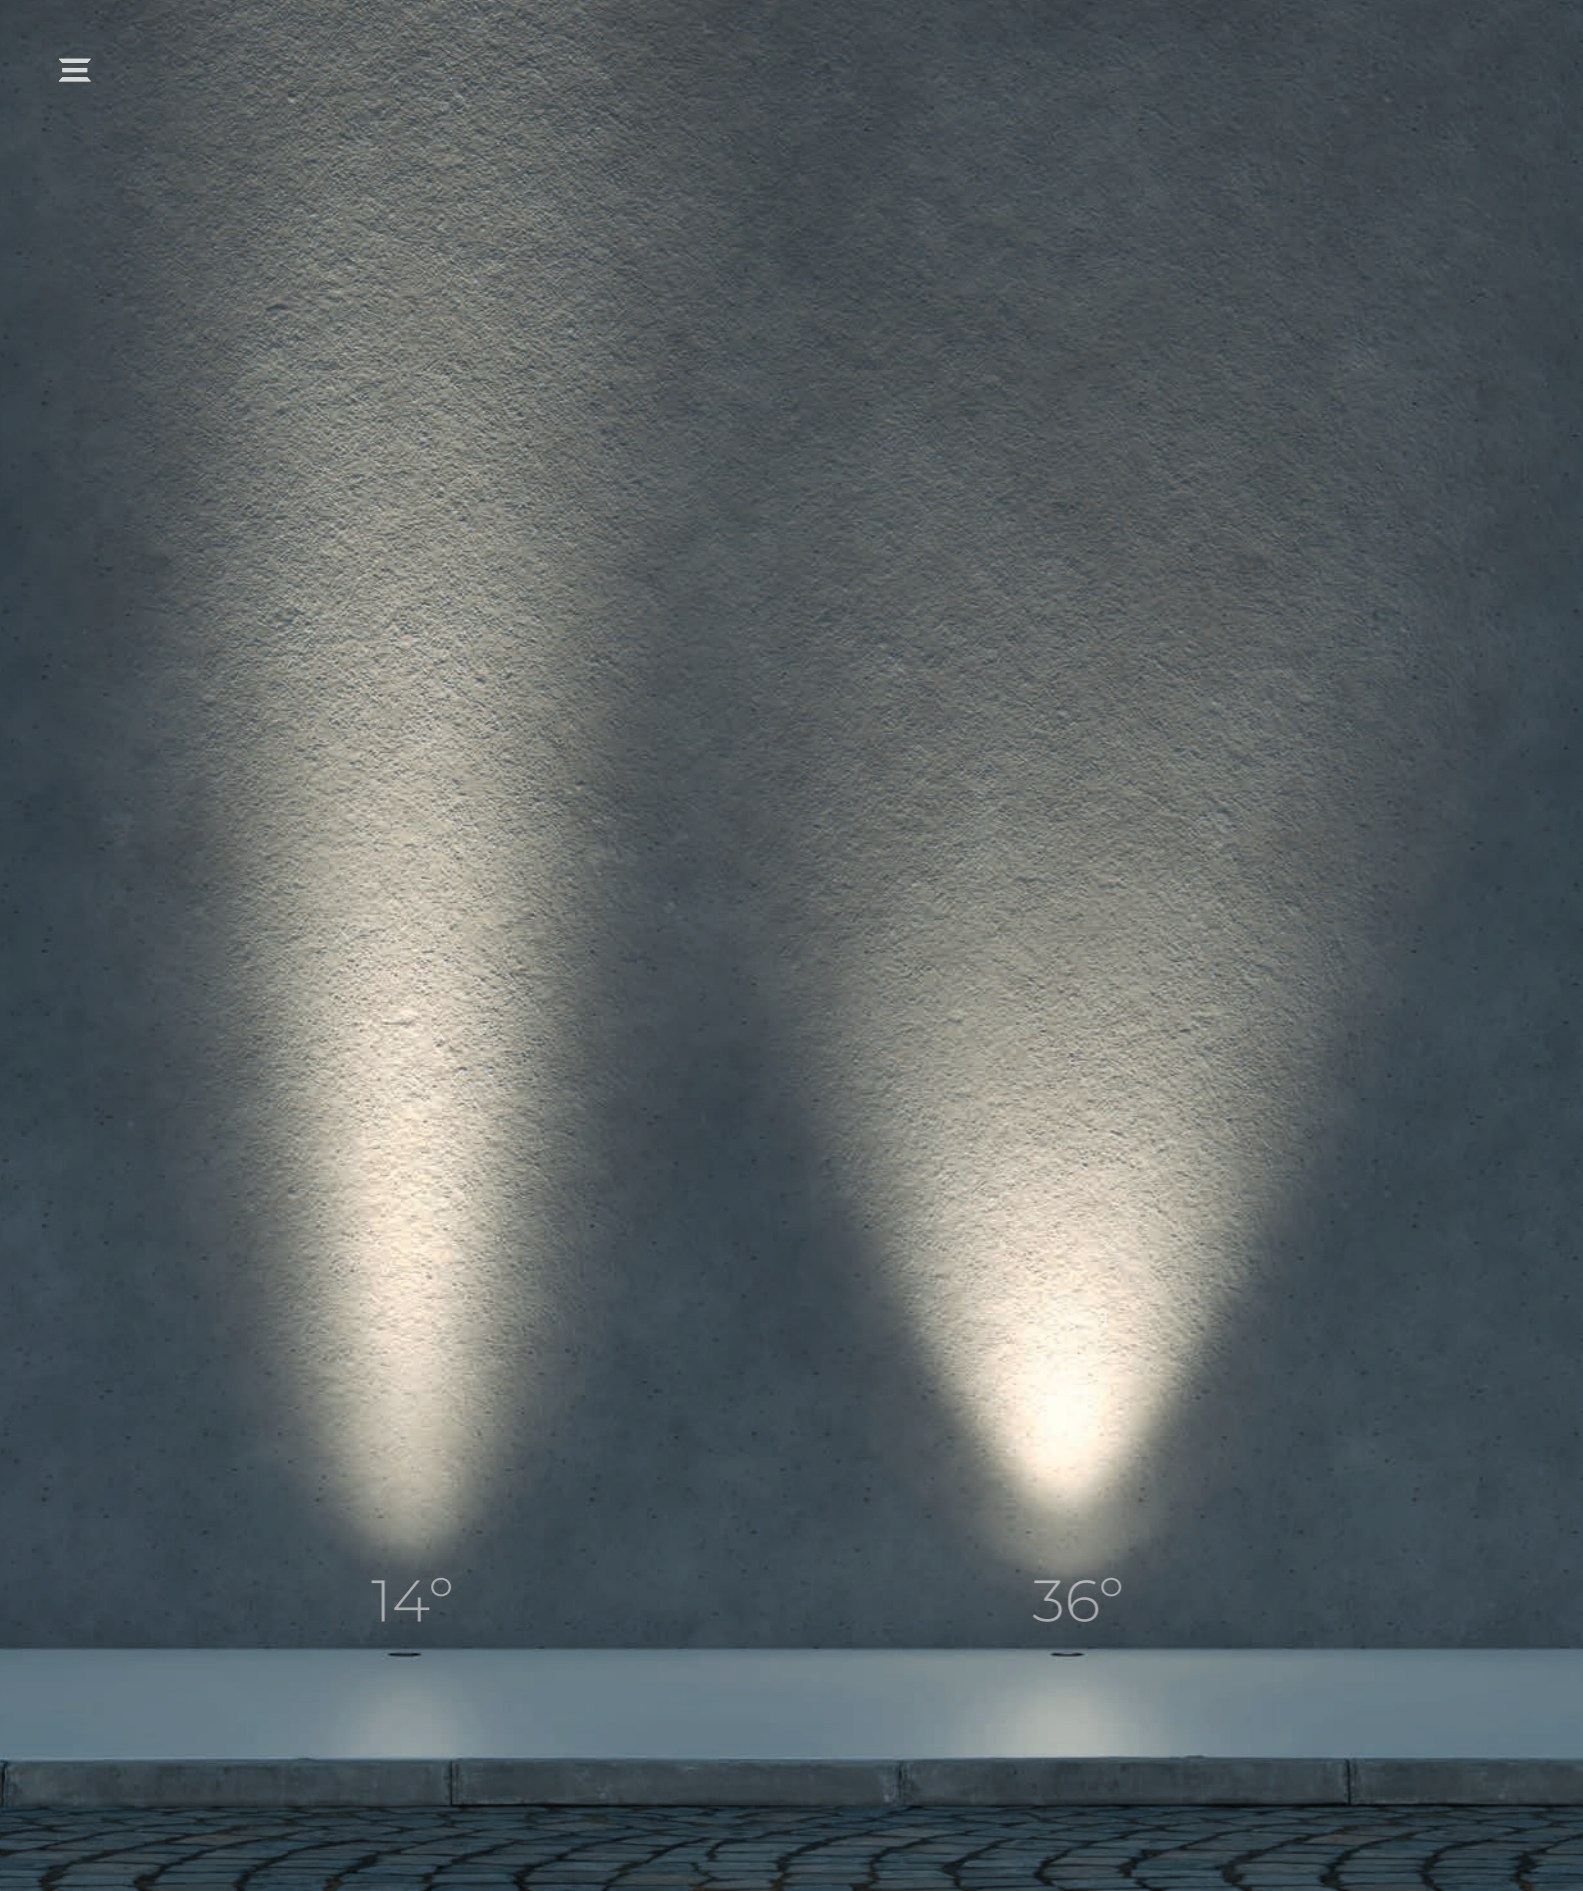

14°


36°



14°

WITH ANTI-GLARE GRID

3000K

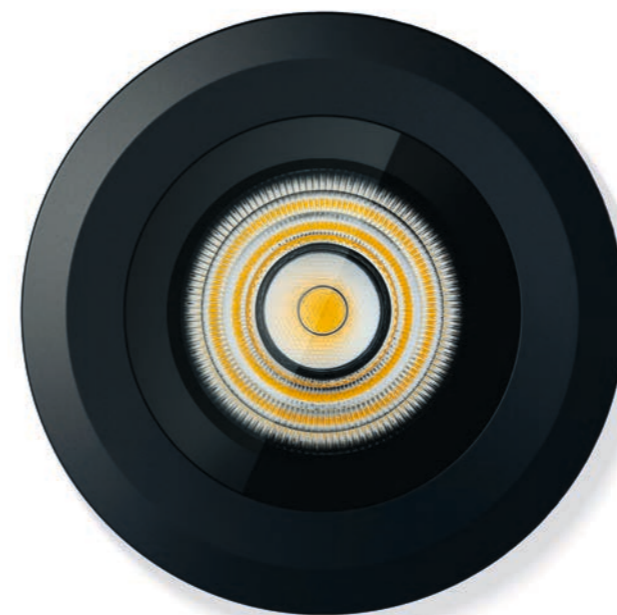

36°

3000K



LED INGROUND



S.GROUND · LED INGROUND








POWER	BLACK	BLACK WITH ANTI-GLARE GRID	STAINLESS STEEL		
3W					
4W					
6,5W					
11,5W					
18,5W					
INSTALLATION CASING INCLUDED					
	3W · FIXED	4W · ADJUSTABLE	6,5W · ADJUSTABLE	11,5W · ADJUSTABLE	18,5W · ADJUSTABLE



LED SPIKE



S.GROUND · LED SPIKE

POWER	LED SPIKE	LED SPIKE WITH ANTI-GLARE GRID
3W		
4W		
6,5W		
11,5W		
18,5W		



S.GROUND.
NATURE INSPIRES.
LIGHTING REVEALS.



S.GROUND · LED INGROUND



Power	3W	4W	6,5W	6,5W	11,5W	11,5W	18,5W	18,5W
Luminous Flux	250lm	320lm	520lm	360lm	950lm	700lm	1500lm	1120lm
Luminous Efficacy	83lm/W	80lm/W	80lm/W	55lm/W	82lm/W	60lm/W	81lm/W	60lm/W
Luminous Intensity	600cd	700cd	1300cd	3200cd	3100cd	8300cd	3800cd	12500cd
Beam Angle	36°	36°	36°	14°	36°	14°	36°	14°
Power Factor	>0,70	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor
Color Temperature	3000K	3000K	3000K	3000K	3000K	3000K	3000K	3000K
CRI	>80	>80	>80	>80	>80	>80	>80	>80
Dimensions*	Ø: 55mm H: 90mm	Ø: 55mm H: 90mm	Ø: 66mm H: 100mm	Ø: 66mm H: 100mm	Ø: 87mm H: 110mm	Ø: 87mm H: 110mm	Ø: 111mm H: 120mm	Ø: 111mm H: 120mm

Predominant Material	ABS	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
-----------------------------	-----	----------	----------	----------	----------	----------	----------	----------

H2OFF	Installation Casing	Fixed	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
	Protection Degree	IP67	IP67	IP67	IP67	IP67	IP67	IP67
	Block System	Anti-Condensation Device + High-Density Cable						

Reference	STL23705/30 (Black)	STL23706/30 (Black)	STL23707/30 (Black) STL23727/30 (Stainless Steel)	STL23717/30 (Black)	STL23708/30 (Black) STL23728/30 (Stainless Steel)	STL23718/30 (Black)	STL23709/30 (Black)	STL23719/30 (Black)
------------------	------------------------	------------------------	--	------------------------	--	------------------------	------------------------	------------------------

S.GROUND · LED SPIKE



Power	3W	4W	6,5W	6,5W	11,5W	11,5W	18,5W	18,5W
Luminous Flux	250lm	320lm	520lm	360lm	950lm	700lm	1500lm	1120lm
Luminous Efficacy	83lm/W	80lm/W	80lm/W	55lm/W	82lm/W	60lm/W	81lm/W	60lm/W
Luminous Intensity	600cd	700cd	1300cd	3200cd	3100cd	8300cd	3800cd	12500cd
Beam Angle	36°	36°	36°	14°	36°	14°	36°	14°
Power Factor	>0,70	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor	>0,92 High power factor
Color Temperature	3000K	3000K	3000K	3000K	3000K	3000K	3000K	3000K
CRI	>80	>80	>80	>80	>80	>80	>80	>80
Dimensions	H: 292mm Ø: 40mm D: 90mm	H: 292mm Ø: 40mm D: 90mm	H: 334mm Ø: 50mm D: 100mm	H: 334mm Ø: 50mm D: 100mm	H: 384mm Ø: 68mm D: 110mm	H: 384mm Ø: 68mm D: 110mm	H: 432mm Ø: 98mm D: 120mm	H: 432mm Ø: 98mm D: 120mm

Predominant Material	ABS	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
-----------------------------	-----	----------	----------	----------	----------	----------	----------	----------

H2OFF	Protection Degree	IP67	IP67	IP67	IP67	IP67	IP67	IP67	
	Block System	Anti-Condensation Device + High-Density Cable							

Reference	STL23752/30 (Black)	STL23753/30 (Black)	STL23754/30 (Black)	STL23764/30 (Black)	STL23755/30 (Black)	STL23765/30 (Black)	STL23756/30 (Black)	STL23766/30 (Black)
------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------	------------------------

Indicated accessory: IP68 Wiring Box - STH9799

*3W LED Inground's Installation Casing has different measurements: Ø: 128mm - Height: 110mm
Elevation Ring: Accessory, sold separately.

STELLA

[Get inspired with us online.](#)

www.stella.com.br

[Instagram | @stella.iluminacao](#)

[Facebook | /stella.iluminacao](#)

[YouTube | /stellailuminacao](#)

[Pinterest | /stellailuminacao](#)

[LinkedIn | /stellailuminacao](#)

