


Decoupling mat P980

Decoupling mat
DM I.X 25
 EA No. 3758-1

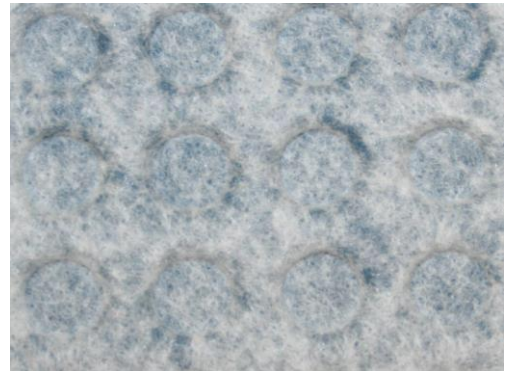

Description:	Decoupling mat with dimpled structure.
Product category:	CFT-Components for Tiling
Product group:	DM
Material composition:	Substrate: Polypropylene Membrane: Polyethylene
Application:	Membrane with high decoupling capability.
Colour:	Blue
Resistance to temperature: min. / max.	- 40°C / + 80°C
Total width:	1000 mm
Length per roll:	30 m; 10 m; 5 m;

Physical Properties: (approx.)	DIN	Value	
Thickness:	Internal	3 mm	> 2,8mm
Total weight:	Internal	550 g/m ²	-25 / +100 g/m ²
Bonding strength	DIN EN 1348	> 0,1 N / mm ² *	
Point load test	ANSI 118-12 (5.2)	≥ 1000 lb	
Pressure Test - Compression	Internal	89,8 %	
Crack bridging test: joint crack	Internal	0,9 mm	
Crack bridging test: shearing off he tile	Internal	3,7 mm	

* in dependence of the used adhesive

Chemical Properties:	Resistance to a wide range of chemical liquids
-----------------------------	--

Certified according to DIN EN ISO 9001: 2015	Made in Europe
---	-----------------------

Warranty: 5 years warranty for the guaranteed product qualities

Attention: Due to technical reasons the colour of the material or the printing may vary slightly from batch to batch.

Storage: cool and dry, protect against sunlight, use within 24 months after receipt.

The above technical data represent average values. The technical information and application instructions are based on our experience and present knowledge. However, it is each users own responsibility to make trials with the original substrates in order to verify the suitability of our products for the intended purpose, taking into consideration all application related parameters. Please contact us if you have any further questions.