




Type: **DRAE 180-4 B.4GF**

Part no.: C10-18016



Curve:

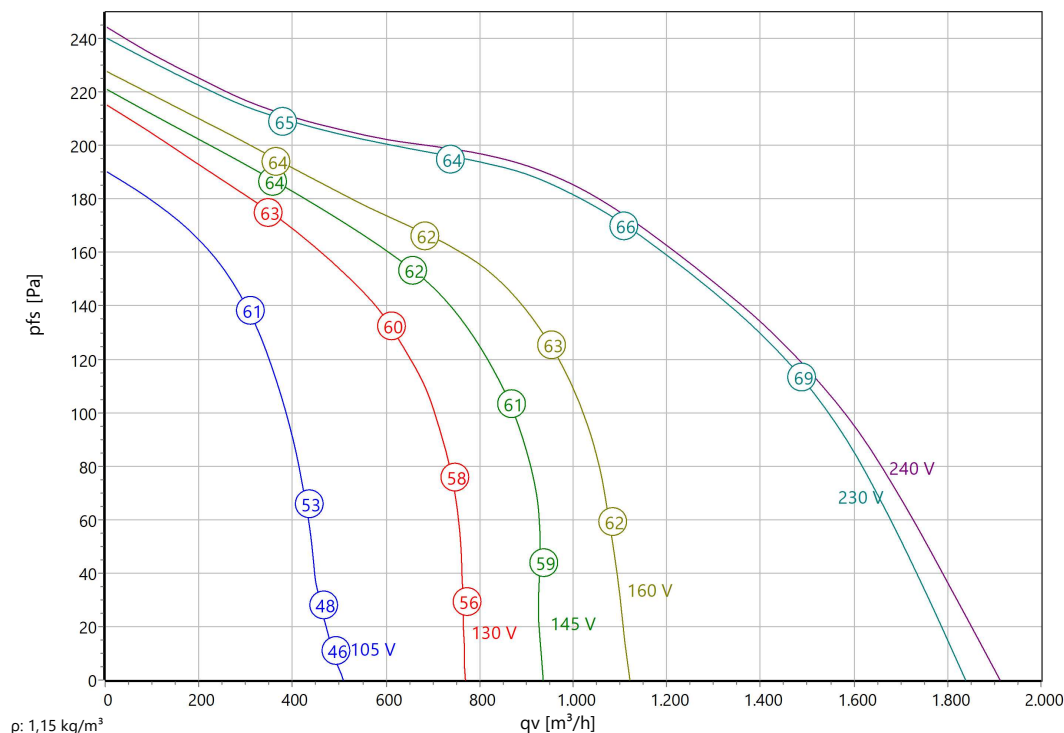

ErP-Data:

(EU) Nr. 327/2011	(Lot11)
qV	1100 m^3/h
pf	215 Pa
η_{tot}	38,5 %
Pe	0,15 kW
n	1399 r/min
N	50
v	7,66 m/s

Nominal Data:

ΔI 1,5 %

U [V]	f [Hz]	C [μF]	Pe [kW]	IN [A]	nN [r/min]	tR [°C]	k10 [$m^2 s/h$]	IA / IN	IP	m [kg]
230	50	4	0,32	1,46	1140	-25 .. +70	-	2	IP 54	10


Sound Data:

Frequency	Σ	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	5 m
LwA(B,in) [dB(A)]	-1	-20	-13	-9	-7	-6	-9	-15	LpA(B,in) [dB(A)]	-8	-19
LwA(B,out) [dB(A)]		-16	-12	-7	-4	-8	-9	-15	LpA(B,out) [dB(A)]	-7	-18



Type: **DRAE 180-4 B.4GF**

Part no.: C10-18016

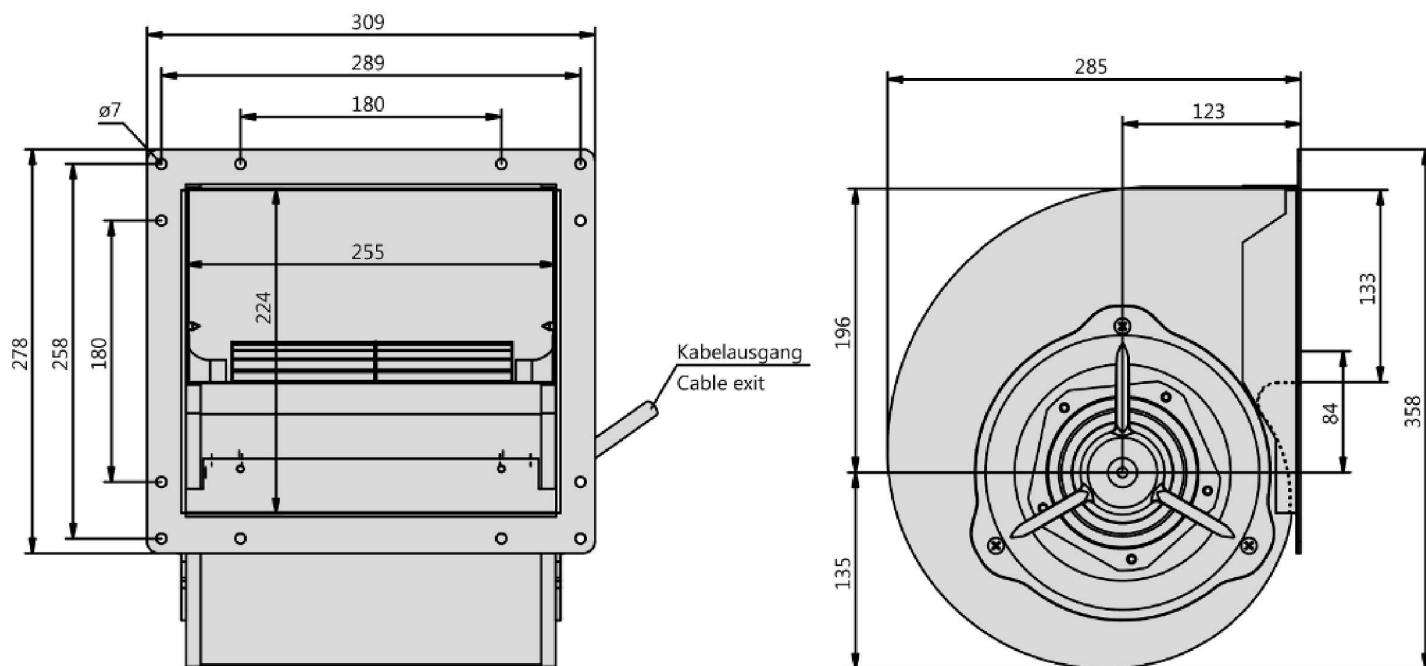



Type: **DRAE 180-4 B.4GF**
 Part no.: C10-18016



Einphasenwechselstrommotor mit Betriebskondensator und Thermostatschalter (TB). Bei Verwendung von RE Steuergeräten TB mit der Wicklung in Reihe schalten. Hierfür Brücke (x) einlegen und gestrichelt gezeichnete Anschlüsse belegen.


Single phase A.C. motor with operating capacitor and therostatic switch (TB). TB wired in series with windings if RE controllers are used. Insert bridge (x) and wire connections shon as dash-line on the drawing.

Moteur monophasé avec condensateur permanent et interrupteur thermostatique (TB) branché en série avec le bobinage en cas de branchement avec des régulateurs RE. Mettre un pont (x) et brancher toutes les connexions dessinées en hachuré.

Linkslauf

anti- clockwise

rotation anti- horaire

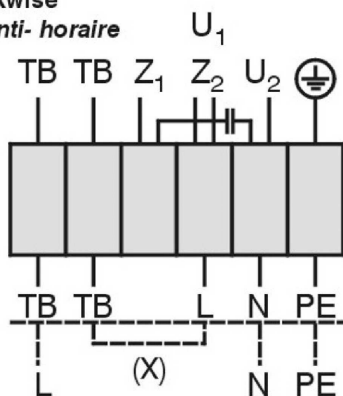

U₁ braun / brown / brun
 U₂ blau / blue / bleu
 Z₁ schwarz / black / noir
 Z₂ orange / orange / orange

TB weiß / white / blanc
 PE gelb-grün
 yellow-green
 jaune-vert

01.025

TK3-20003

AC-Centrifugal Fan double inlet

in scroll casing with forward curved impeller

Double inlet impeller made of galvanized steel sheet with forward curved blades. Due to the high number of blades results in a sound optimized and at the same time compact design. Fluidic optimized scroll casing made from galvanised sheet metal. Double inlet. Stands respectively casing mountable in all 90° positions. Motorized Impeller statically and dynamically balanced according to DIN ISO 21940-11 with quality level G2.5. Voltage controllable AC external rotor motor. Maintenance free ball bearings, closed on both sides with long-term lubrication. Motor coated black and/or die casted aluminum. Standard configuration with cable. Motor protection is guaranteed by thermal contacts, which are inlaid into the motor windings. These contacts protect the motor from being overloaded through phase failure, too high medium temperature or locked rotor. Isolation Class F.

Fan complies with the guidelines required (Machinery-, EMC- and Low Voltage Directive) to comply with installation and conformity declaration as well as CE marking. Standard version with UL approval.

Nominal Data:

Voltage

230 V

Frequency

50 Hz

Input power

0,32 kW

Current

1,46 A

Speed

1140 r/min

Medium temperature

70 °C

Protection Mode

IP 54

Weight

10 kg

Dimensions

285 mm / 309 mm / 358 mm

Contact:

Rosenberg Ventilatoren BV

Elandlaan 8

NL - 3734 CP Den Dolder

www.rosenberg.nl

Type:

DRAE 180-4 B.4GF

Article-No.:

C10-18016