


Lampen controllers

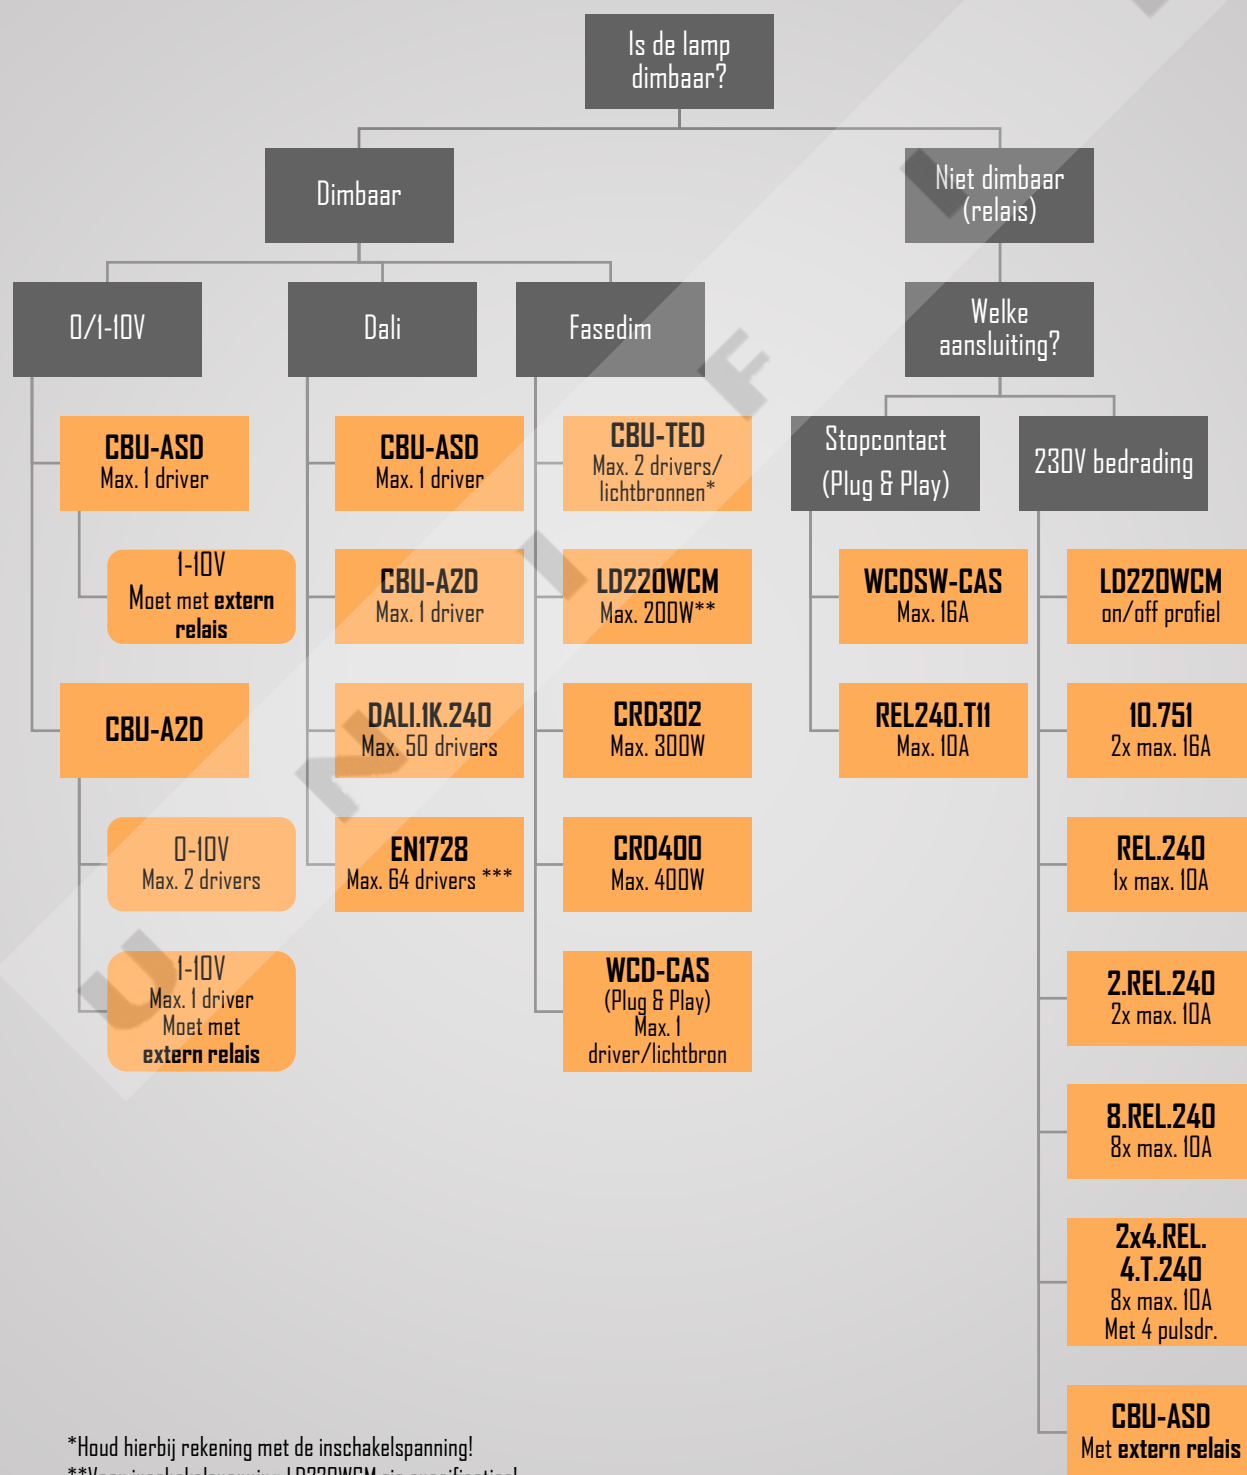

*Houd hierbij rekening met de inschakelspanning!

**Voor inschakelspanning LD220WCM zie specificaties!

***Let op 24V-48V voeding nodig!



CBU-ASD



CBU-A2D



Extern relais



DALI.IK.240



ENI728



CBU-TED



LD220WCM



CRD302



CRD400



WCD-CAS



WCDSW-CAS



REL240.TII



10.75I



REL.240



2.REL.240




8.REL.240



2x4.REL.4.T.240



12V-24V-48V controllers

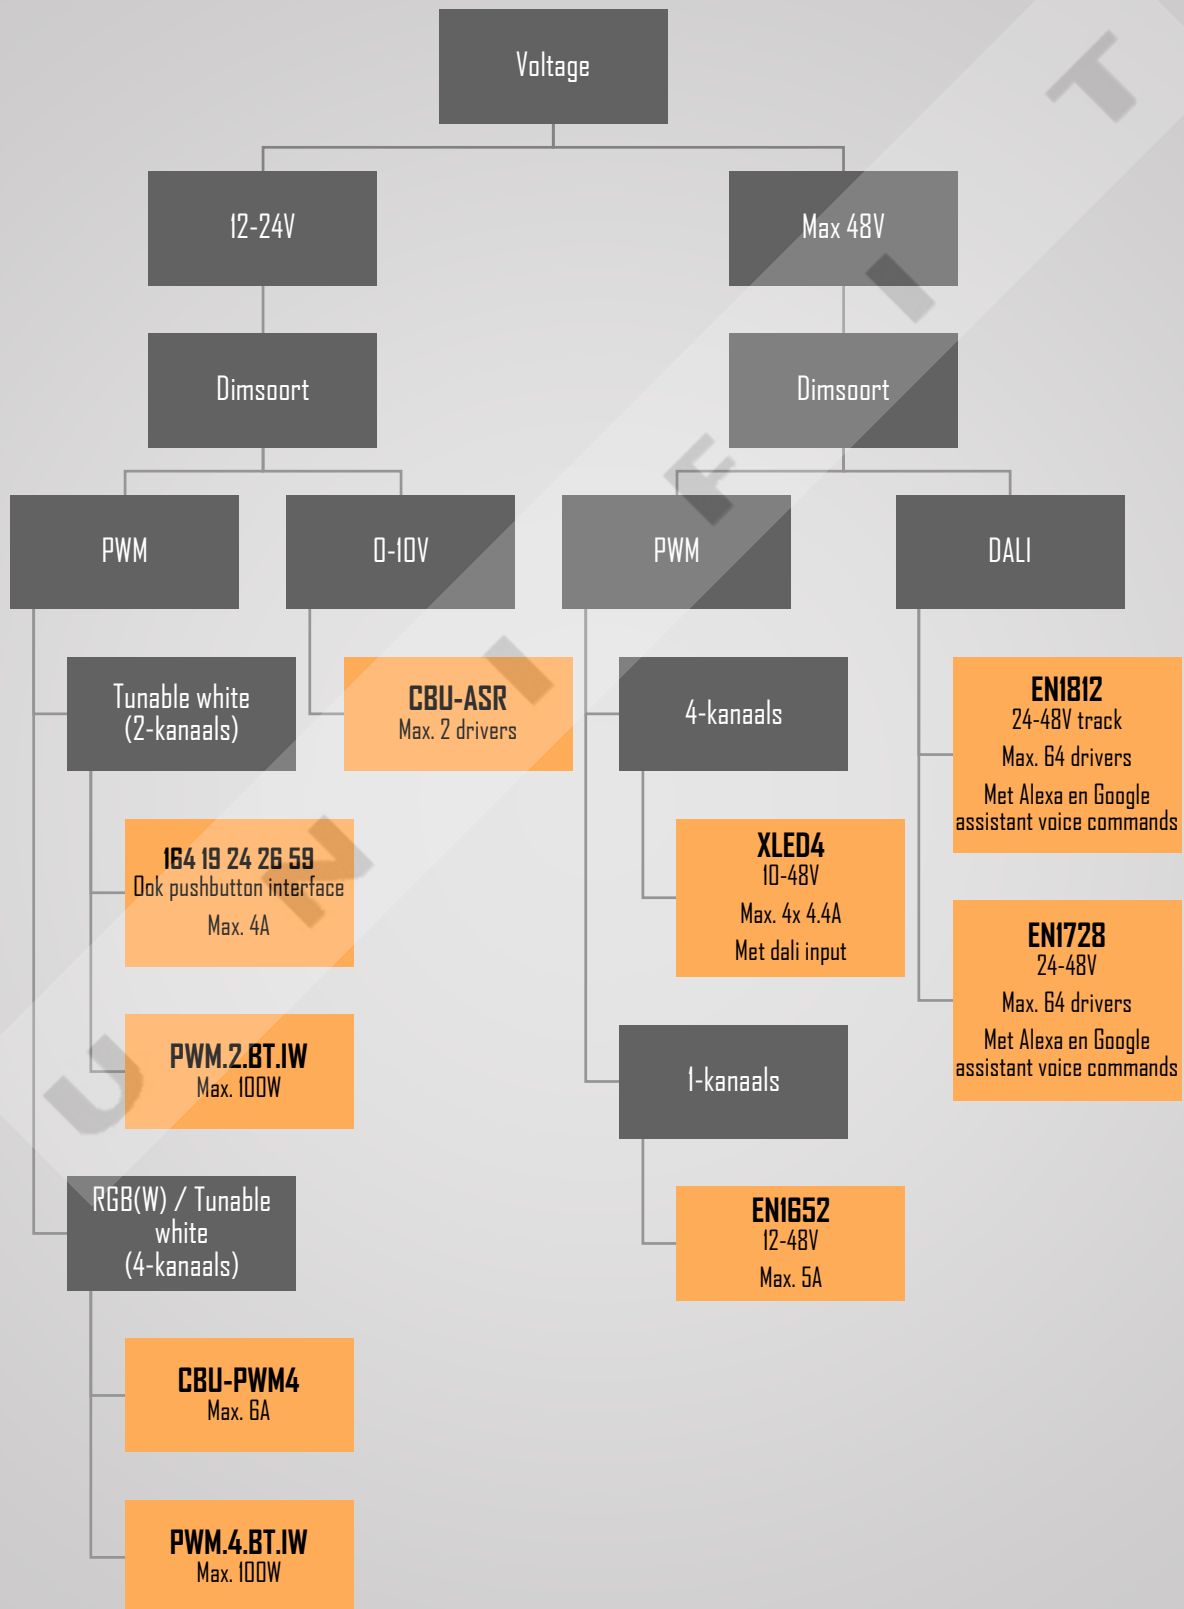



164 19 24 26 59



PWM.2.BT.IW



CBU-PWM4



PWM.4.BT.IW



CBU-ASR



XLED4



EN1652




EN1812



EN1728



Schakelaars

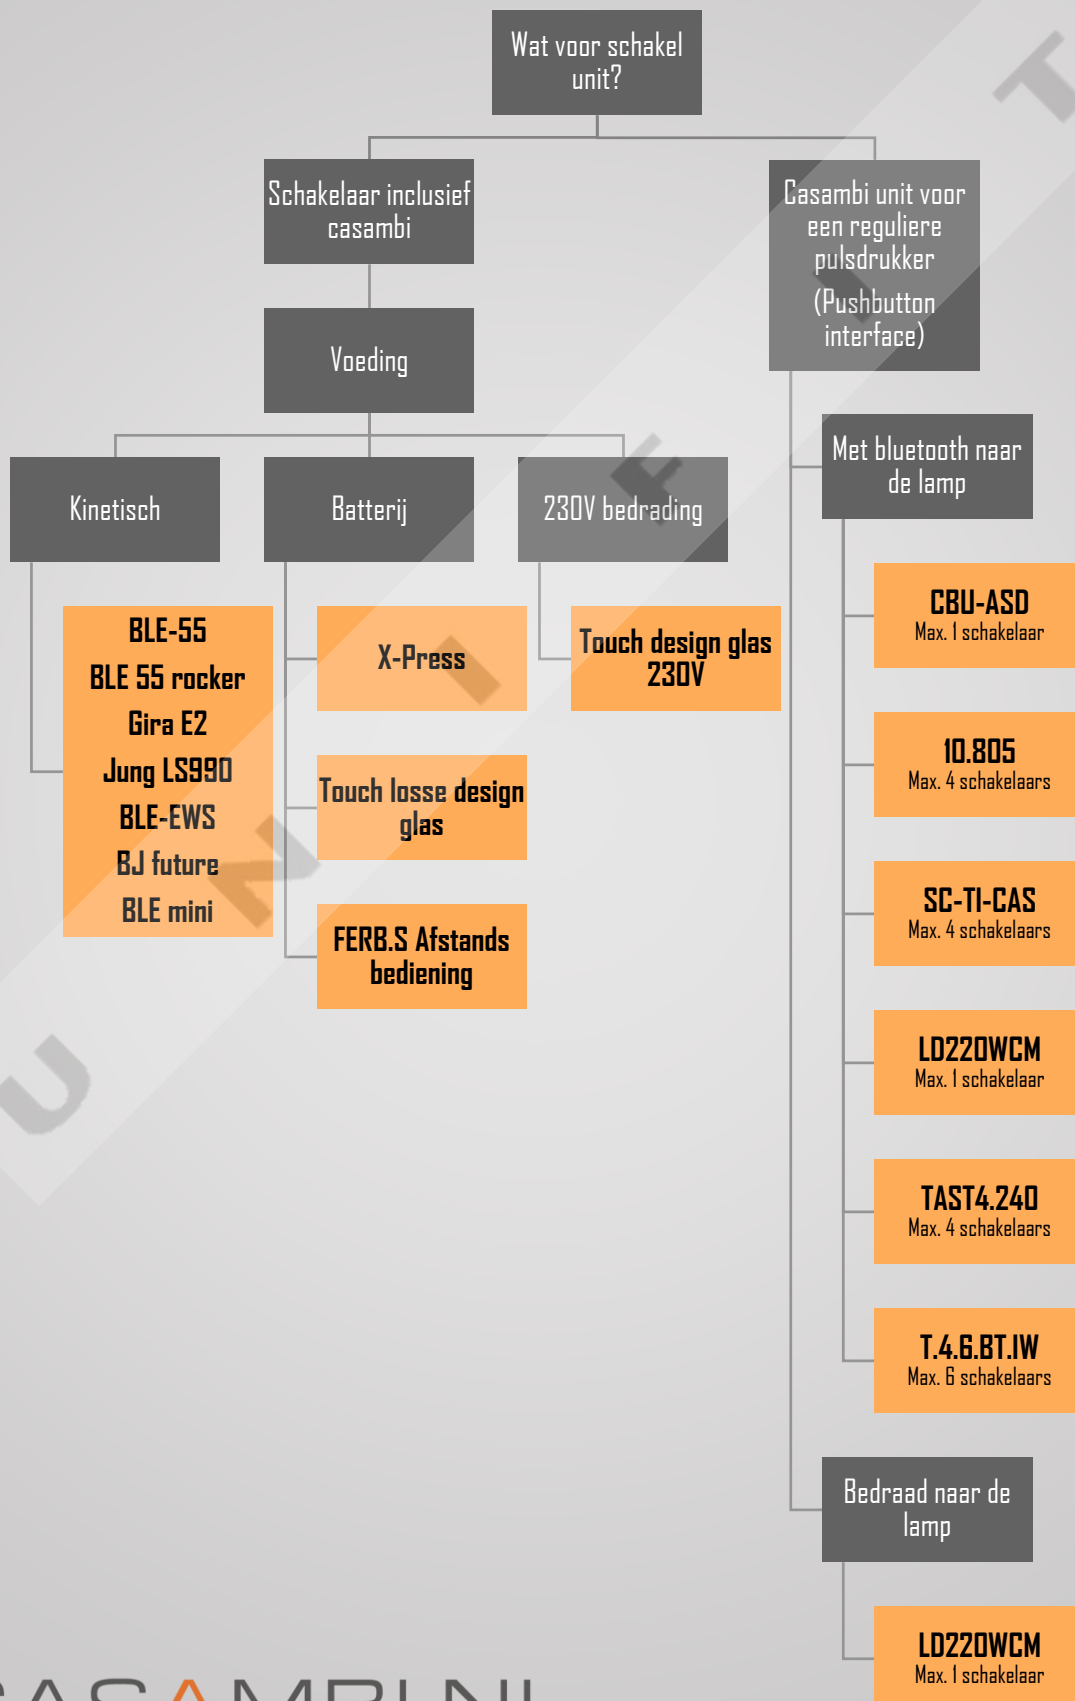



Kinetische schakelaars



X-Press



Touch losse design glas



FERB.S



Touch design glas 230V



CBU-ASD



10.805



SC-TI-CAS



LD220WCM




TAST4.240



T.4.6.BT.IW



Beweging en licht sensoren

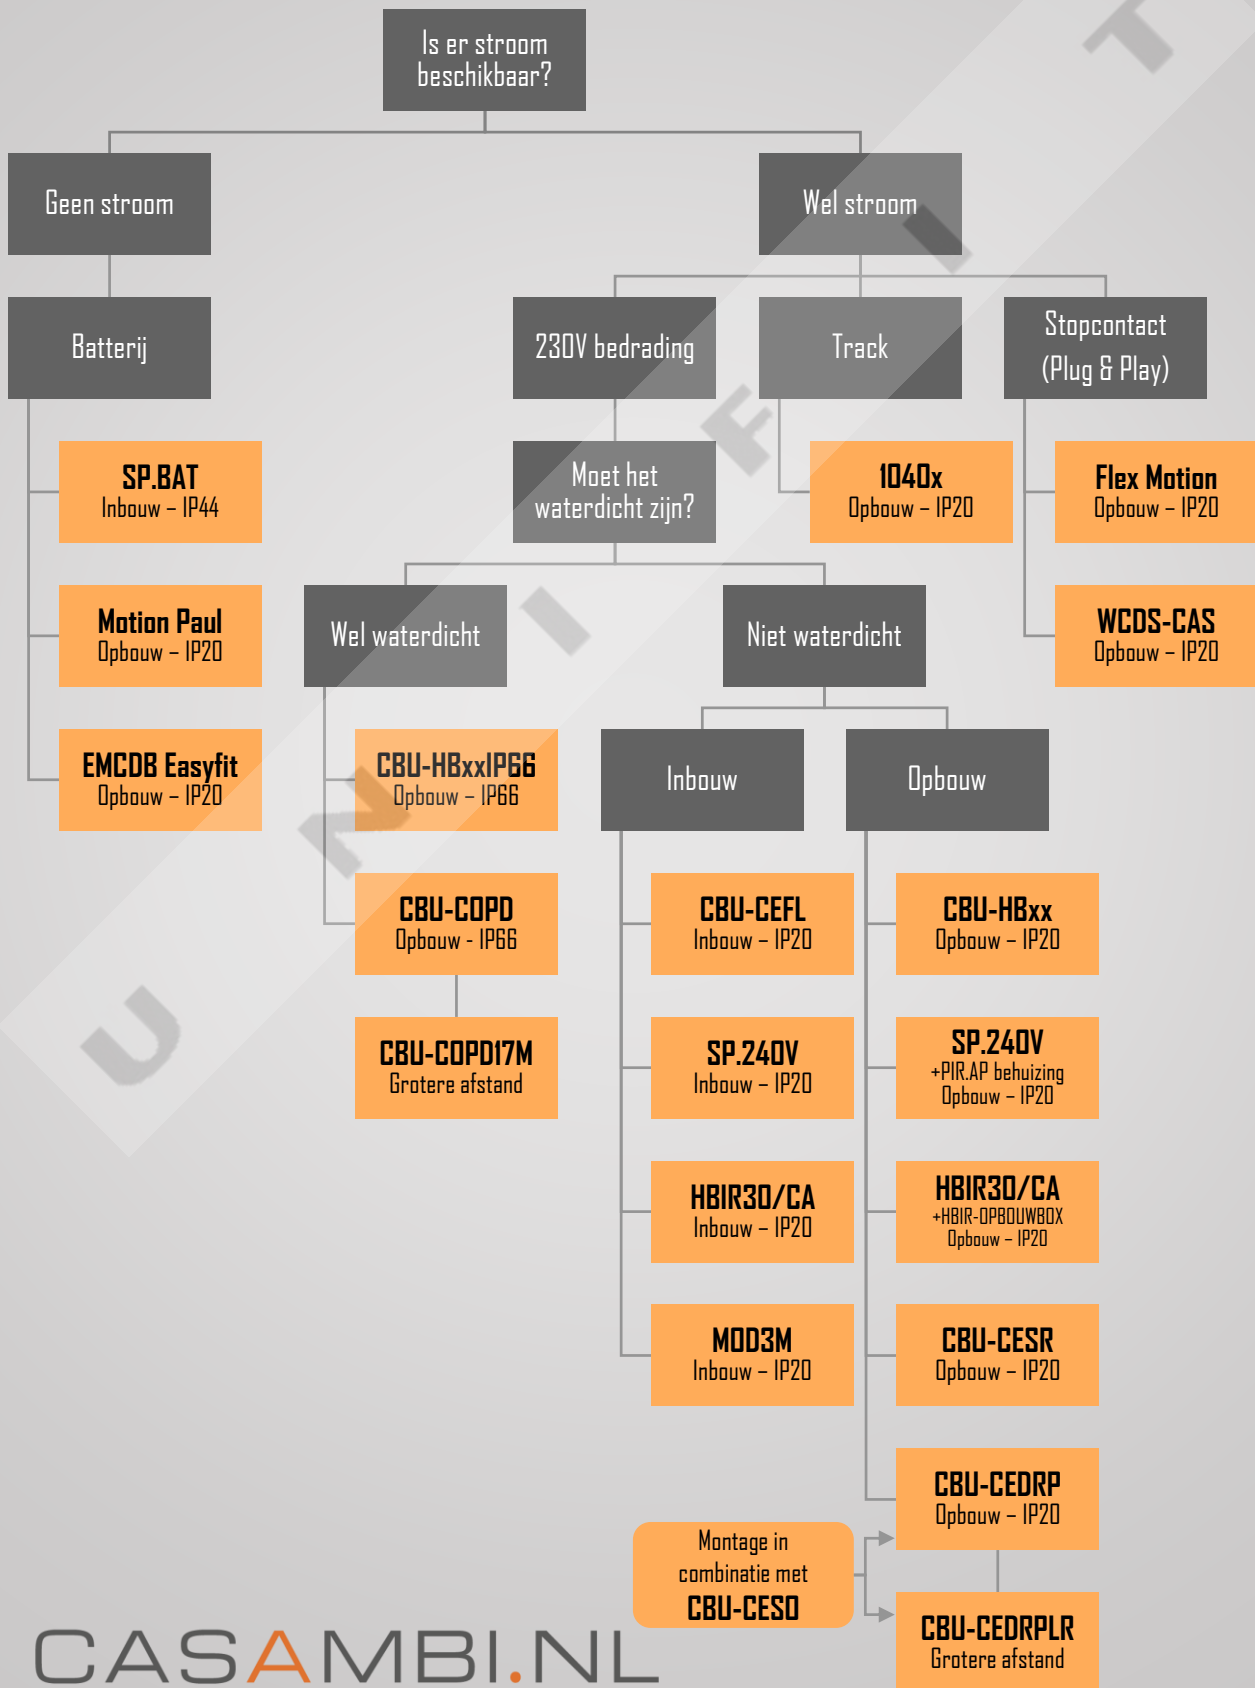



SP.BAT



Motion Paul



EMCDB Easyfit



CBU-HBxxIP66



CBU-COPD



CBU-COPDI7M



CBU-CEFL



SP.240V



HBIR3D/CA



CBU-MOD3M



CBU-HBxx



PIR.AP
Behuizing



HBIR-OPBOUWBOX



CBU-CESR



CBU-CEDRP



CBU-CEDRPLR



CBU-CESO



ID40x



Flex Motion



WCDS-CAS

