

ekicontrol

coil processing lines

DISCOVER YOUR
UPCOMING
CUTTING LINE

JÖRG[®]
machines

www.jorg.com 0488 - 482 087

Nobelweg 3 • 6669 MV Dodewaard • NL
Verkoop • reparatie • onderhoud

INDEX

| | |
|--------------------------------|-------|
| About us | 2-3 |
| Benefits of starting from coil | 4-5 |
| Our machines | 6-7 |
| Multiblanking | 8-15 |
| Cut-to-length | 16-21 |
| Straightening lines | 22-23 |
| Slitting lines | 24-25 |
| Recoiling lines | 26-27 |
| Integrations | 28-29 |
| Peripherals | 30-31 |
| Ekicontrol in the world | 32-33 |

ekicontrol


We are
manufacturers
of coil
processing lines

Together with the leading
companies in their sector,
we design customised solutions
tailored to every need



Share your idea with me and we will
work together on the solution.

JON Navarro Labaka
CEO ekicontrol



A Family Company

Ekicontrol Coil Processing Lines is a family company located in the Basque Country, Spain, since 1986. We design, manufacture and install coil processing lines for carbon steel, stainless steel, and aluminum metal coils.



With Extensive Experience

We manufacture slitting, cut-to-length, multiblanking lines, combined cutting lines to cut and wind simultaneously, complete press feed lines, lines with special requirements, with internal punching, profiling, as well as peripherals such as uncoilers, loading cars, straighteners, rollers, static shears, flying shears, stacking tables, packaging, etc.



Projected towards the Future

We have been providing solutions to our clients around the world for more than 30 years. We offer the highest European quality standards. We have shown that we know how to listen to our customers to work together and find the right solution at all times, for each need.



BENEFITS OF STARTING THE PRODUCTION PROCESS FROM COIL

SAVINGS IN RAW MATERIALS

The purchase of coil instead of format implies an average saving of 5% in raw material cost. We make the most of the coil length, thus wasting less material. This way, we will achieve a greater benefit for our final product.

HIGHER PRODUCTIVITY

A 1-ton 1-millimeter-thick coil is 850 meters long. With an Ekicontrol cutting line, we can cut 3-meter formats in less than an hour.

FLEXIBILITY

The flexibility of having the circular blades implemented in the straightener module allows us to adjust the width and make all the cuts of the coil on the same machine

LESS STORAGE SPACE

The coils take up much less space than the traditional sheet metal format. They are comfortable to store, and their handling is agile and safe.

ADAPTABILITY

We can adapt all kinds of reception tables of formats: scissor tables, fixed tables, tables of different lengths, interchangeable to adapt to your manufacturing needs.

STRAIGHTENING QUALITY

The quality of the straightening of our cutting lines accomplishes with the most demanding international standards.

Integrating a cutting line into your production processes has many advantages. Below you can see the differences between having and not having a cutting line.



WITHOUT A CUTTING LINE

- ✗ Request for formats of different standard length measures.
- ✗ Minimum purchase quantity 3000 kgs. (a normal truck can transport 20 tons of weight) therefore 6 packages of formats. [1,926,000 total mm].
- ✗ Quick ground storage to continue unloading the truck and so on with each pack of formats.
- ✗ Once the format packages, the strapping, the wooden pallet, plastic wrappers have been stored, they must be removed and these have been paid at the price of sheet metal.
- ✗ The sheets must be handled by operators and transferred individually by operators, minimum of 2 to the work table. A standard 1500x3000x0.8 mm sheet weighs approx. 28 kilos.
- ✗ If you need to use a sheet of more than the one you have in stock, for example, 4500 mm. You have to make that piece 3000 + 1500mm, either weld it or not.
- ✗ The standard measurement formats will be stored for their next uses, starting the process from the beginning.



WITH CUTTING LINE

- ✓ All the meters you need, regardless of formats.
- ✓ Buying coils you can load 2 coils of 10 tons each [2,200,000 total mm].
- ✓ Unload all the kilos at once with the crane.
- ✓ You take the coil directly to the warehouse.
- ✓ Much less wood, wrap, and strap are used with the coil.
- ✓ A single operator loads the coil on the loading car of the cutting line and starts to cut the pieces you need with the desired length.
- ✓ Directly from the coil, you can cut the desired length, without junction or waste.
- ✓ The coils will always be ready to be cut to the desired number and length for their maximum efficiency.

OUR MACHINES

It is not machines but ideas
that drive and drag the
world forward.


Victor Hugo

MULTIBLANKING

XS Line 1250

TwinCut 20

TwinCut 30




CUT-TO-LENGTH


OneCut 20

OneCut 30

OneCut 40



Straightening lines



Slitting lines



Recoiling lines



MULTIBLANKING CUTTING LINES

At Ekicontrol we are specialists in Multiblanking Lines. Below we present our range of products...


XS Line ¹²⁵⁰



TwinCut ²⁰



TwinCut ³⁰



APPLICATION SECTORS



1

Refrigeration equipment
manufacturers



2

Manufacturers of metal furniture



3

Refrigerator/ Cooler manufacturers



4

Manufacturers of metal cabinets



5

Manufacturers of metallic electrical
cabinets



6

Metal precast manufacturers



7

Manufacturers of industrial kitchens
in stainless



8

Industrial oven manufacturers



9

Metal door manufacturers



10

Manufacturers of finials and gutters



11

Metal enclosures



12

Elevator manufacturers



13

Sheet metal cutting and bending
service centres



14

Manufacturers of metal facades



15

Kitchenware industry



16

Manufacturers of white lines
of appliances



17

Manufacturers of metal drums



18

Bus manufacturers



XS Line 1250



Its low cost, compact size, ease of handling and high performance, allows to configure a very versatile cutting line.


It can be combined, a single winder, a multicoil system and even the traditional uncoiler with a coil car.



| Model | Maximum width | Material to be processed | Thickness | No. of simultaneous slitting cuts | Speed | Coil weight | No. of simultaneous slitting cuts | No. of straightening slitting cuts | Shears power | Measurements |
|--------------|---------------|----------------------------------|-----------|-----------------------------------|-----------------------------|---------------|--|------------------------------------|--------------|-----------------------------------|
| XS line 1250 | 1250 | Steel 420 Nw/mm | 1,25 mm | 2 | From 0 to 20 metre x minute | 3, 6, 10 tons | 2+5 (2 pull rollers, 2 upper and 3 lower) | 1'5 Kw | 3 Kw | 2100 x 1700 x 1450 mm 2.500 Kg |
| | | | 1,00 mm | 4 | | | | | | |
| | | | 0,50 mm | 6 | | | | | | |
| | | Steel 700 Nw/mm ² | 0,75 mm | 2 | | | | | | |
| | | | 0,50 mm | 4 | | | | | | |
| | | Aluminium 200 Nw/mm ² | 2,50 mm | 2 | | | | | | |
| | | | 1,50 mm | 4 | | | | | | |
| | | | 1,00 mm | 6 | | | | | | |

MOST COMMON SECTORS OF APPLICATION

- | | | | |
|----|----|----|----|
| 1 | 3 | 8 | 10 |
| 13 | 14 | 16 | 18 |

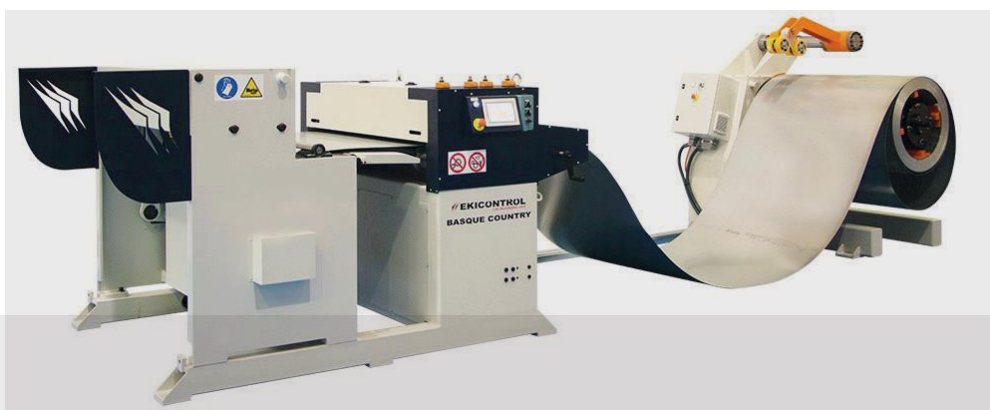

XS LINE 1250 DM5



ADAPTABILITY



VERSATILITY



COMPACT



TwinCut²⁰



Designed and built for multi-format. Allows simultaneous slitting and cut-to-length cutting. High cutting quality and repeatability.



It's Perfect

| Model | Width to be processed | Cutting thickness (mm) | Coil weight (kg) | Number of longitudinal cuts | Cutting accuracy | Straightening rollers | Speed |
|----------------------------|--------------------------|------------------------|------------------|-----------------------------|------------------|-----------------------|----------|
| TwinCut ²⁰ | 1.000 - 1.250 - 1.500 mm | 0,5 - 2 | 6.000 | 3-6 | ±0'5 mm | 2 + 7 | 20 m/min |
| | | | 10.000 | | | | |
| | | | 15.000 | | | | |
| TwinCut ²⁰ Plus | 1.550 mm 1.050 mm | 0,6 - 2 3 | 6.000 | 3-6 | ±0'5 mm | 2 + 7 | 20 m/min |
| | | | 10.000 | | | | |
| | | | 15.000 | | | | |

MOST COMMON SECTORS OF APPLICATION


- | | | | |
|----|----|----|----|
| 1 | 4 | 8 | 13 |
| 14 | 15 | 16 | 18 |



HYDRAULIC INTRODUCTION TABLE




QUICK BLADE EXTRACTION

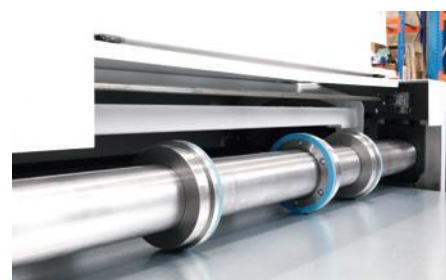

CIRCULAR BLADES



TOUCH SCREEN

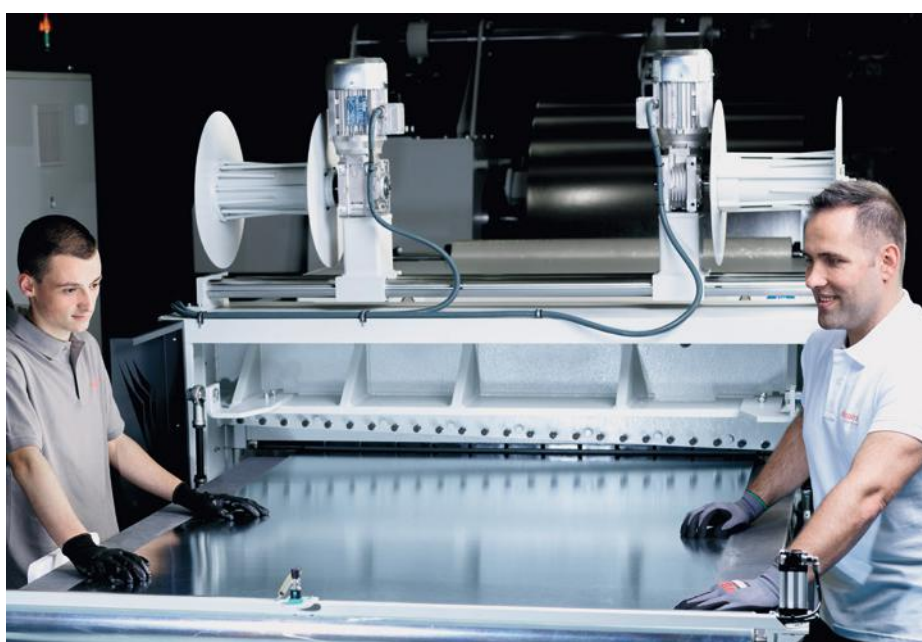

QUALITY STRAIGHTENING



TwinCut 30



Complete slitting & cut to length lines
from 6 to 20 tons coil weight.



| Model | Width to be processed | Coil weight [kg] | Minimum thickness [mm] | Maximum thickness [Steel 420 Nw/mm²] | Speed | Back up rolls | Tilting |
|------------|-----------------------|----------------------------|------------------------|--------------------------------------|----------|---------------|-----------|
| TwinCut 30 | 1550 | 10.000 15.000 20.000 | 0'6 | 3 mm | 30 m/min | Tes | Motorized |

MOST COMMON SECTORS OF APPLICATION

- | | | | |
|----|----|----|----|
| 1 | 4 | 7 | 8 |
| 13 | 14 | 16 | 18 |



QUALITY STRAIGHTENING



TILTING STRAIGHTENING



QUICK BLADE EXTRACTION

CUT-TO-LENGTH LINES

At Ekicontrol we are specialists in Cut-to-length lines.

The OneCut can work autonomously, or in a continuous punching machine or sheet metal warehouse.

OneCut 20



OneCut 30



OneCut 40



APPLICATION SECTORS



1

Refrigeration equipment
manufacturers



2

Manufacturers of metal furniture



3

Manufacturers of refrigerators



4

Manufacturers of metal cabinets



5

Manufacturers of metallic
electrical cabinets



6

Metal precast manufacturers



7

Manufacturers of industrial kitchens
in stainless



8

Industrial oven manufacturers



9

Metal door manufacturers



10

Manufacturers of finials and gutters



11

Metal enclosures



12

Elevator manufacturers



13

Sheet metal cutting and bending
service centres



14

Manufacturers of metal facades



15

Kitchenware industry



16

Manufacturers of white lines
of appliances



17

Manufacturers of metal drums



18

Bus manufacturers



OneCut²⁰




Cut to length lines from 6 to 20 tons of coil weight.



| Model | Material to be processed | Width to be processed | Thickness [R=450Nw/mm ²] | Speed | Cut accuracy | Coil loading capacity |
|----------------------|----------------------------------|-----------------------|--------------------------------------|----------------|--------------|-----------------------|
| OneCut ²⁰ | Steel 420 Nw/mm ² | 1000, 1250, 1500 mm | From 0,5 to 1,5 – 2,0 mm | Up to 20 m/min | ±0'5 mm | 4, 6, 10, 15 tons |
| | Steel 700 Nw/mm ² | | | | | |
| | Aluminium 200 Nw/mm ² | | | | | |

MOST COMMON SECTORS OF APPLICATION



ONECUT 20 DM10



CAN BE INTEGRATED WITH OTHER MACHINES




SCREEN REMOTE ASSISTANCE



STRAIGHTENING 7 ROLLERS




OneCut 30/40

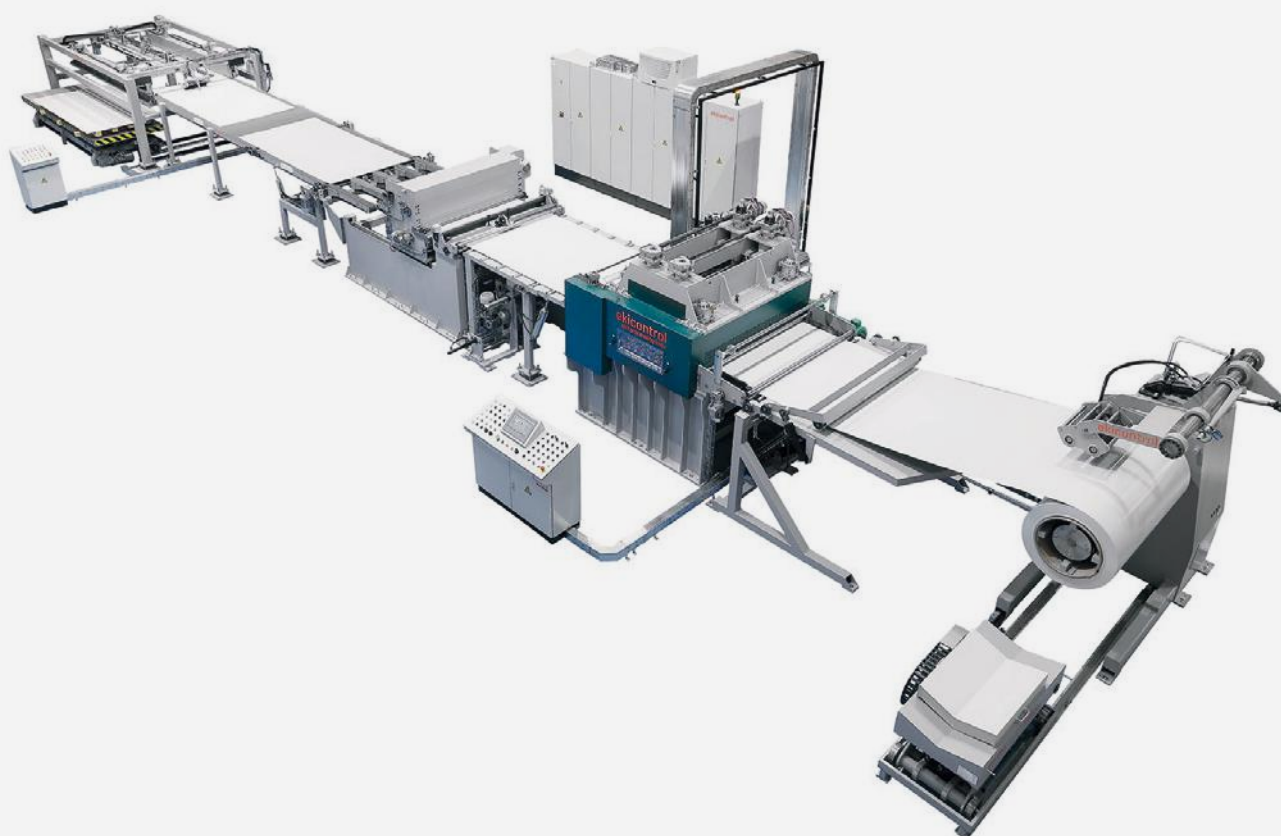

| Model | Material to be processed | Width to be processed | Thickness ($R=450\text{Nw/mm}^2$) | Speed | Cut accuracy | Coil loading capacity |
|----------------------|------------------------------|-----------------------|--|----------------|--------------|-----------------------|
| OneCut ³⁰ | Steel 420 Nw/mm ² | 1500 mm | From 0,6 to 1,5 - 3,0 mm | Up to 30 m/min | ±0'5 mm | 10, 15 tons |
| OneCut ⁴⁰ | | 1550 mm | 0,8 - 4,0 mm | | | |

MOST COMMON SECTORS OF APPLICATION



INDUSTRIAL



ONECUT 40 DM10



HYDRAULIC INTRODUCTION TABLE



CROSS-CUTTING



AUTOMATIC STACKER


STRAIGHTENING LINES



Our machines are a fusion between the mechanical design and the electronic equipment necessary to achieve the ideal tuning and, as a result of our natural commitment, very energy efficient.



MOST COMMON SECTORS OF APPLICATION



DOUBLE LOOP

| Model | Width | Roller diameters | No. of rollers | Minimum thickness | Maximum thickness | Thickness in maximum width |
|--|-------|----------------------|----------------|--------------------------------------|--|--|
| EA-400-66 EA-400-76 EA-400-86 EA-400-96 | 400 | 66 76 86 96 | 2 + 7 + 2 | 0'4 mm 0'5 mm 0'7 mm 0'8 mm | 4'50 mm 6'00 mm 7'50 mm 9'00 mm | 3'00 mm 4'00 mm 5'00 mm 6'00 mm |
| EA-600-66 EA-600-76 EA-600-86 EA-600-96 | 600 | 66 76 86 96 | 2 + 7 + 2 | 0'4 mm 0'5 mm 0'7 mm 0'8 mm | 3'00 mm 4'50 mm 6'00 mm 7'50 mm | 2'00 mm 3'00 mm 4'00 mm 5'00 mm |
| EA-800-66 EA-800-76 EA-800-86 EA-800-96 | 800 | 66 76 86 96 | 2 + 7 + 2 | 0'4 mm 0'5 mm 0'7 mm 0'8 mm | 2'50 mm 3'00 mm 3'50 mm 6'00 mm | 1'50 mm 2'00 mm 2'50 mm 4'00 mm |
| EA-1000-76 EA-1000-86 EA-1000-96 | 1000 | 76 86 96 | 2 + 7 + 2 | 0'5 mm 0'7 mm 0'8 mm | 2'50 mm 3'00 mm 4'50 mm | 1'50 mm 2'00 mm 3'00 mm |
| EA-1250-76 EA-1250-86 EA-1250-96 | 1250 | 76 86 96 | 2 + 7 + 2 | 0'5 mm 0'7 mm 0'8 mm | 1'50 mm 2'00 mm 3'20 mm | 1'00 mm 1'20 mm 2'50 mm |
| EA-1500-96 | 1500 | 96 | 2 + 7 + 2 | 0'8 mm | 3'00 mm | 2'00 mm |

coil processing lines


SLITTING LINES



Complete slitting lines from 6 to 20 tons of coil weight.
From 0.5 to 3.0 mm thick.



MOST COMMON SECTORS OF APPLICATION



Characteristics

- Complete slitting lines from 6 to 20 tons of coil weight.
- From 0.5 to 3.0 mm thick.
- Speeds adapted to production.
- Combination of simultaneous longitudinal and transverse cutting.
- Quick adjustment of circular blades avoiding long cutting setup times.
- Precision electronics.
- Excellent price-quality.



RECOILING LINES




Designed and manufactured to conform
small coils from a mother coil.
It allows the operator to program the size
of the resulting coil either by weight, length,
or diameter.



It incorporates a system of labeling and it can be equipped with a plastic film applicator that is applied above and below the coil. May also include a paper winder and applicator.

The coil turn-around system allows placing the coil in a vertical position on any means to transport it.

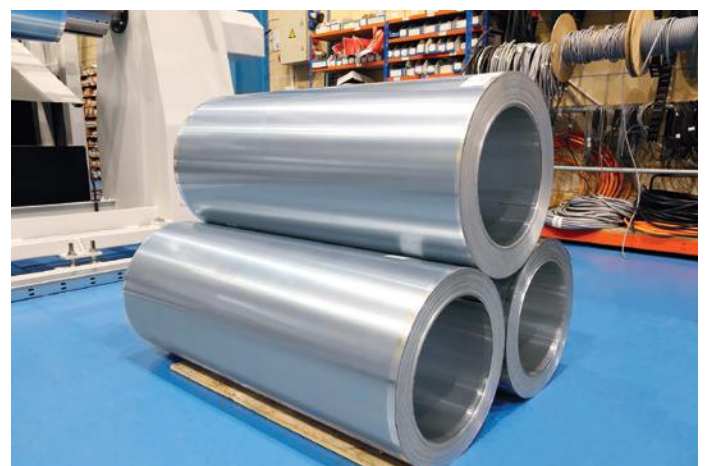



INTEGRATIONS AND CUSTOMIZATIONS

The benefits of
integration and work
from the coil allows
savings of up to 30%.

They range from saving in material , on transport , on time , on lock , in the number of operators that must operate the machine, in the space that occupies the same amount of material in the stock (coil vs sheets), until the improvement of the efficiency and the productivity .

Our machines can be equipped with any other punching machines, laser cutting, folding machines, presses, etc.

This enables a fully automated start-to-finish DONE-IN-ONE manufacturing process, exponentially improving the quality, efficiency and productivity of the

process and the end product.

Our extensive experience in the design and manufacture of machinery has allowed us to design these types of lines capable of adapting to all processes.



INTEGRATION WITH SALVAGNINI



INTEGRATION WITH AMADA



INTEGRATION WITH DANOBAT




INTEGRATION WITH TRUMPF



INTEGRATION WITH LÁSER FIBRA

PERIPHERAL ACCESSORIES

Adaptable to any machine
in use or process

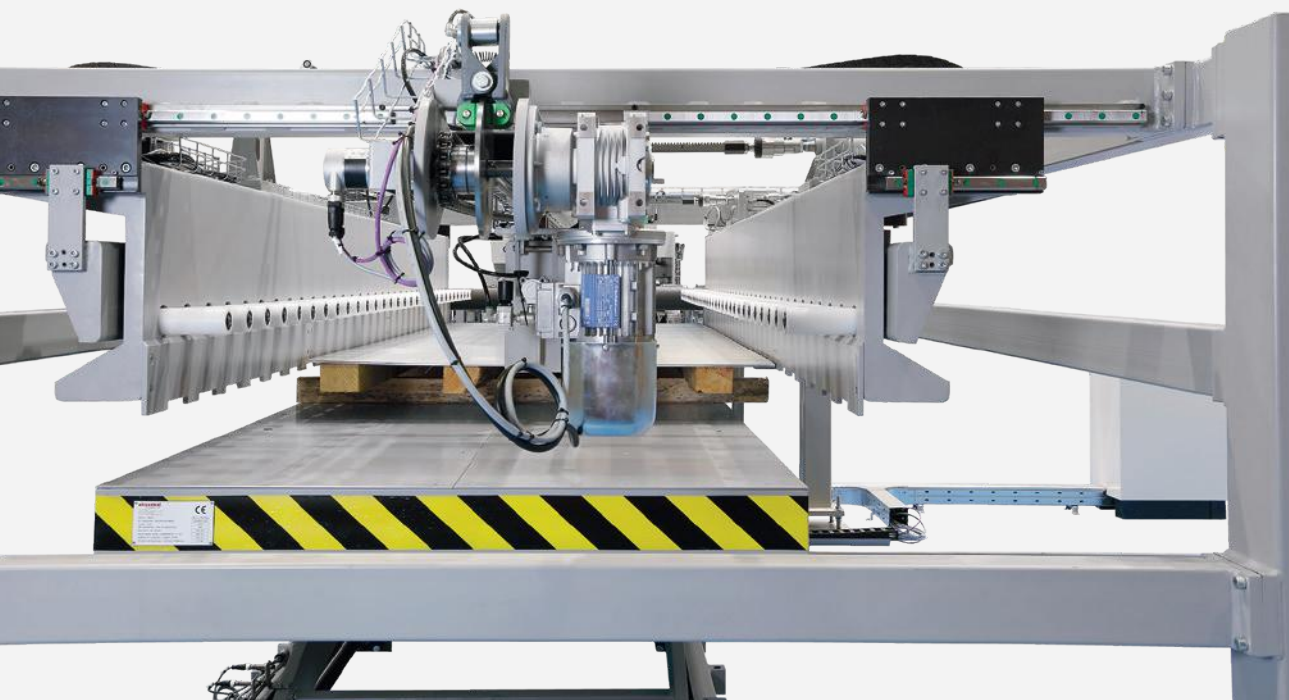



AUTOMATIC STACKER



UNCOILER



LABELLER



MULTICAR COIL



TRIPLE UNCOILER

ekicontrol IN THE WORLD



We are seeking dealers,
contact us





AMERICA

Imocom SAS
COLOMBIA

CMAINPRO
ECUADOR

Legama
PERU

Fabexpert
MEXICO

ASIA

RadCAM Technologies Pvt. Ltd.
INDIA

EUROPE

EKICONTROL Coil Processing Lines
SPAIN

EKICONTROL France
FRANCE

Jörg Machines
NEDERLAND

INDEL - USLUGE d.o.o.
HRVATSKA

Hesse & Co Maschinenfabrik GmbH
ÖSTERREICH

Kapema A/S
DANMARK

Nixxon Steel sp. z o.o.
POLSKA

Bulldog Machinery
UNITED KINGDOM

JÖRG®
machines

www.jorg.com 0488 - 482 087

Nobelweg 3 • 6669 MV Dodewaard • NL
Verkoop • reparatie • onderhoud