


EIGER 4061

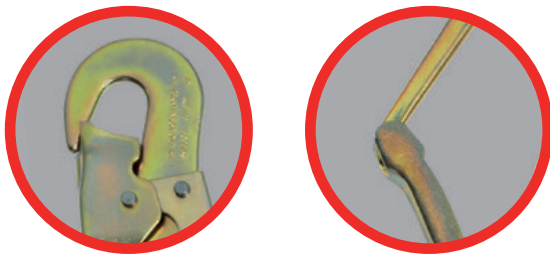

CHARACTERISTICS

- This energy-absorbing kernmantle fall protection lanyard comprises a shock absorber with 44 mm wide webbing, which reduces the effect of the drop to less than 6 kN, a 12 mm (diameter) polyamide kernmantle rope, a steel musketon hook (opening 16 mm) and a steel scaffolding hook with automatic locking opening 50.8 mm)
- Eyes are protected by a wear-resistant thimble
- The attachment of the lifeline rope is secured with a strong transparent cover sheath that protects the end, making the stitches visible for easy inspection
- Length: 2 metres

Article number: 8.84.061.00

SUITABLE FOR WORK IN, E.G.:

- Scaffolding
- Construction
- Installation technology
- Aerial platforms
- Offshore
- Petrochemicals

PACKAGING

- 1 piece per polybag
- 10 pieces per case

CE 0598
EN 355-2:2002

ITEM INFORMATION

SIZE	ARTICLE NO.	EAN CODE 1 PIECE (POLYBAG)	EAN CODE 10 PIECES (CASE)
One size	8.84.061.00	8718249047329	8718249047336

STORAGE REQUIREMENTS

During transport, keep the energy absorber in its packaging, well away from any cutting surface. Clean it with water, wipe it with a rag and hang it up in a well-ventilated location, to let it dry naturally and away from a naked flame or heat source; follow the same procedure for components that have become damp during use. The energy absorber should be stored in its packaging in a warm, dry, ventilated place, protected from sunlight, heat and chemicals.

TESTING INSTITUTE

This fall protection is certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Clonee, Dublin D15 YN2P, Ireland.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, please refer to the following web link:
www.oxxa-safety.com/doc


RELATED PRODUCTS



FUJI 4015

Harness 3D

Article no. 8.84.015.00



STAINLESS STEEL ANCHOR HOOK

110 mm

Article no. 8.82.691.00



MOROTO 4184

Removable shoulder pads

Article no. 8.84.184.00

YOUR SUPPLIER: