



FIT




GRIP



DEXTERITY

X-NITRILE-FOAM

51-280

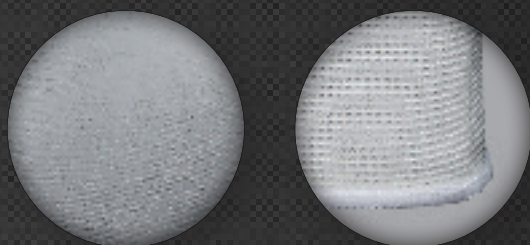

CHARACTERISTICS

- Nitrile foam coating on the palm and fingers
- Nylon liner (13 gauge)
- Elastic knitted wrist cuff
- Seamless glove
- Their good grip makes these gloves ideal for working with dry or lightly oiled components
- The light coating affords excellent mobility
- Very good ventilation on the back of the hand
- The light colours make these gloves ideal for activities where one must be able to immediately detect dirt
- Approved for processing dry foodstuffs
- Free from harmful substances in accordance with OEKO-TEX® Standard 100

Article number: 1.51.280.00

SUITABLE FOR ACTIVITIES IN E.G.

- Clean work applications
- Painting industry
- Dry food industry
- Construction
- Installation technology
- Engineering
- Assembly
- Transport & logistics
- Automotive

COLOUR

Grey/white

SIZES

7/S to 11/XXL incl.

PACKAGING

- 1 pair per headercard
- 12 pairs per bundle
- 144 pairs per outer box

EN388:2016
+A1:2018



4131

EN407:2020



X1XXXX



EN ISO 21420:2020+A1:2024



PRODUCT INFORMATION

SIZE	ARTICLE NO.	EAN CODE 1 PAIR (HEADERCARD)	EAN CODE 12 PAIRS (BUNDLE)	EAN CODE 144 PAIRS (OUTER BOX)
7/S	1.51.280.07	8718249027819	8718249027826	8718249027833
8/M	1.51.280.08	8718249027840	8718249027857	8718249027864
9/L	1.51.280.09	8718249027871	8718249027888	8718249027895
10/XL	1.51.280.10	8718249027901	8718249027918	8718249027925
11/XXL	1.51.280.11	8718249027932	8718249027949	8718249027956

COLOUR OF BINDING/OVERLOCKING

Sizes	7/S	8/M	9/L	10/XL	11/XXL
Colour of binding/overlocking	yellow	green	blue	grey	black

CLARIFICATION OF PICTOGRAMS

EN388:2016+A1:2018



4131X

EN388:2016+A1:2018



abcdef

Protection against mechanical hazards

A = Scuff resistance (0-4)

B = Cut resistance (0-5)

C = Tear resistance (0-4)

D = Puncture resistance (0-4)

E = Cut resistance (in accordance with EN ISO 13977 (A to F)

F = Impact resistance (optional) (P = Passed)

Note: X = untested or not applicable

EN407:2020



X1XXXX

EN407:2020



ABCDEF

Protection against heat and fire risks

A = Limited flame spread (0-4)

B = Contact heat (0-4)

C = Convective heat (0-4)

D = Radiant heat (0-4)

E = Small droplets of molten metal (0-4)

F = Large droplets of molten metal (0-4)

Note: X = untested or not applicable

STORAGE CONDITIONS

The gloves should be kept in a clean, cool and dry place and not kept compressed in its original packaging. Do not expose the clothing to direct sunlight. Make sure that the packaging and the gloves are not damaged during shipping.

TESTING INSTITUTE

These gloves are certified by: CTC (Notified Body no. 0075),
4 Rue Hermann Frenkel 69367 Lyon, Cedex 07, France

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, we refer you to the following link: www.oxxa.work/doc

YOUR SUPPLIER:

