




BILIGHT

GCV 50 44 20 B11 TSR

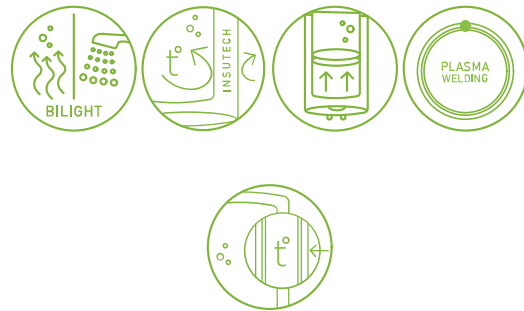

| | |
|---|------------|
| Model | BiLight 50 |
| Real Volume | 50 L |
| Height | 0.595 m |
| Width | 0.440 m |
| Rated power | 2000 W |
| Depth | 0.467 m |
| Mounting | Vertical |
| Heating time Δt 45K (15 - 60°C) | 1:18 h:min |
| Annual consumption of electricity AEC | 1421 kWh |
| Energy class | C |
| Diameter | 440 mm |
| Load profile | M |



| | |
|-----------------------------|-------|
| V40 | 77 L |
| T _{out of the box} | 60 °C |
| MAX40 | 86 L |