




**BILIGHT**

GCV 150 44 20 B11 TSR

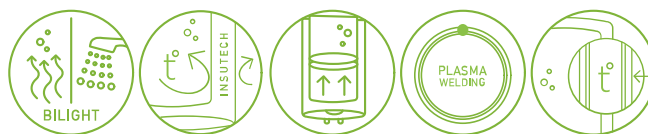

Model	BiLight 150
Real Volume	143 L
Height	1.315 m
Width	0.440 m
Rated power	2000 W
Depth	0.467 m
Mounting	Vertical
Heating time $\Delta t$ 45K (15 - 60°C)	3:44 h:min
Annual consumption of electricity AEC	4404 kWh
Energy class	C
Diameter	440 mm
Load profile	XL



V40	233 L
T <sub>out of the box</sub>	65 °C
MAX40	257 L



The water heaters of the BiLight series have been developed in conformity with the highest European safety standards and quality requirements. The product range offers models with storage capacity of 50 to 150 litres.

- PISTON EFFECT for control of the speed of incoming water and increase of the hot water amount with up to 15%
- INSUTECH - an in-house TESI technology for highly efficient insulation and extremely low heat losses
- BiLight indication for easy and fast recognition of the work modes
- Electric on/off switch
- Freeze protection
- Glass-ceramic coating for corrosion protection
- Plasma-arc welding of the water tank for extended useful life