

iQparts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

ASFA S (12 mm) Hose Clamp Galvanized Steel - W1



W1

This clamp represents the latest stage in the evolution of the ASFA 12mm range. One of the main developments in this version is the lateral displacement of the band thread, which reduces the tendency of the band end to exit the housing off-centre when tightened.

Thanks to the combination of the housing, locking system and the location of the screw within the housing, this clamp offers superior performance at the same torque ratings.

Specially recommended for industrial applications.



DIN 3017. The ASFA SW1 hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.

** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.*

Application Ø										
mm	Part nº	L max.	S +0,10	h max.	a +0,3 a -0,1	b max.	Maximum values		Box Quantity (MOQ)	Outer Packing
							Torque (Nm)	Pressure (Bars)		
16-27	0300900-1	29,6	0,85	11	12,2	16,7	4,5	40	50	400
20-32	0300900-2	29,6	0,85	11	12,2	16,7	5,5	40	50	400
25-40	0300900-3	29,6	0,85	11	12,2	16,7	5,5	40	50	400
30-45	0300900-4	29,6	0,85	11	12,2	16,7	5,5	35	50	400
32-50	0300900-5	29,6	0,85	11	12,2	16,7	6,5	35	50	200
40-60	0300900-6	29,6	0,85	11	12,2	16,7	6,5	30	50	400
50-70	0300900-7	29,6	0,85	11	12,2	16,7	7	25	50	400
60-80	0300900-8	29,6	0,85	11	12,2	16,7	7	20	50	50
70-90	0300900-9	29,6	0,85	11	12,2	16,7	7	17	50	50
80-100	0300901-0	29,6	0,85	11	12,2	16,7	7	14	25	200
90-110	0300901-1	29,6	0,85	11	12,2	16,7	7	12	25	200
100-120	0300901-2	29,6	0,85	11	12,2	16,7	7	10	25	200
110-130	0300901-3	29,6	0,85	11	12,2	16,7	7	8	25	25
120-140	0300901-4	29,6	0,85	11	12,2	16,7	7	7	25	25
130-150	0300901-5	31,6	0,85	11	12,2	16,7	7	6	25	25
140-160	0300901-6	31,6	0,85	11	12,2	16,7	7	5	25	25
150-170	0300901-7	31,6	0,85	11	12,2	16,7	7	4	25	25
160-180	0300901-8	31,6	0,85	11	12,2	16,7	7	3	25	25
170-190	0300901-9	31,6	0,85	11	12,2	16,7	7	2	10	10
180-200	0300902-0	31,6	0,85	11	12,2	16,7	7	2	10	10
190-210	0300902-1	31,6	0,85	11	12,2	16,7	7	1,8	10	10
200-220	0300902-2	31,6	0,85	11	12,2	16,7	7	1,8	10	10
210-230	0300902-3	31,6	0,85	11	12,2	16,7	7	1,6	10	10
220-240	0300902-4	31,6	0,85	11	12,2	16,7	7	1,6	10	10

** It is recommended to apply 75% of the maximum values contained in the table.*

TECHNICAL INFORMATION	
MATERIAL	BAND AND HOUSING: GALVANIZED STEEL (DIN 1.0935) SCREW: STEEL Qst 36-3 (DIN 1.0214)
FINISH	BAND AND HOUSING: GALVANIZED STEEL SCREW: GREY-WHITE Cr3 ZINC-PLATED
CORROSION RESISTANCE	144 HOURS SALT SPRAY (ASTM B-117)
MAXIMUM TIGHTENING SPEED (RPM)	540 ±5

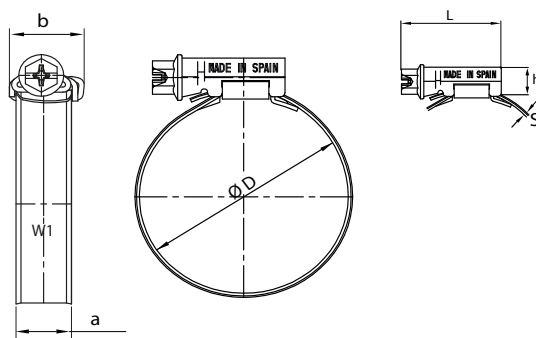

ASFA S-PRO Hose Clamp

DIN 3017



Designed for both manual and automated assembly.

ASFA S-PRO clamps were designed from the outset with the aim of guaranteeing maximum performance at low tightening torque.

All Mikalor hose clips are marked with the application range, material, the Mikalor logo and the country of manufacture in compliance with DIN 3017.

The exclusive design of the housing keeps the screw in firm contact with the band at all times.

Bevelled band edges to avoid the clip cutting into the hose.

Cold formed stamped band thread which gives a very good grip as the raised thread is deeper than the thickness of the material used.

Smooth band underside which avoids damage to the hose.

Inner lip specially designed to guide the band end around the underside of the band. This feature gives ASFA S-PRO superior performance to its competitors.





info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands