


iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

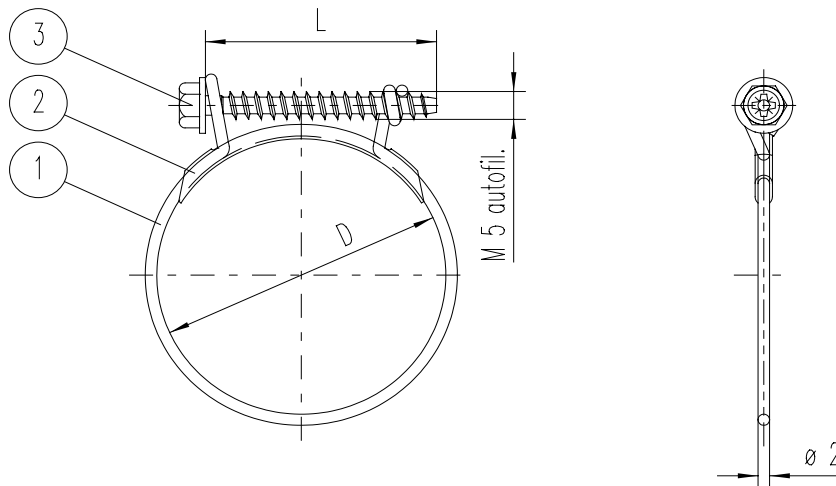

Salt spray test: 48h – UNI ISO 9227.

TECHNICAL CHARACTERISTICS

- | | | |
|-------------------------------------|--------------------|-----------------------------------------------|
| 1) RING | Material: | Steel EN 10270-1-SM-2,00 Z (C72) |
| 2) PONTICELLO | Material: | DX51D +AZ 150 UNI EN 10215 (Aluzink B 500 A) |
| 3) SCREW exagon
screwdriver head | Material: | Steel C21 B KB UNI 7356 hardened and tempered |
| | Surface treatment: | Trivalent galvanising Fe/Zn 5 II |

MODEL	ASSEMBLING D Max. (mm.)	TIGHTENING D Min. (mm.)	SCREW (mm.)	Tightening couple MAX. (N/m)
42 - 49 mm	49	42	L= 40	2
45 - 52 mm	52	45	L= 40	
47 - 55 mm	55	47	L= 40	
50 - 58 mm	58	50	L= 40	
57 - 65 mm	65	57	L= 40	
60 - 68 mm	68	60	L= 40	
62 - 70 mm	70	62	L= 40	
64 - 72 mm	72	64	L= 45	
68 - 74 mm	74	68	L= 45	
68 - 77 mm	77	68	L= 45	
71 - 79 mm	79	71	L= 40	
74 - 82 mm	82	74	L= 45	
76 - 84 mm	84	76	L= 45	
80 - 87 mm	87	80	L= 45	
82 - 90 mm	90	82	L= 45	
93 - 101 mm	101	93	L= 45	
95 - 103 mm	103	95	L= 45	
129 - 137 mm	137	129	L= 45	



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands