

iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

Fittings - PVDF

PVDF




Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
-20 °C - 120 °C
(subject to application)



Fittings' dimensions
refer to tube ID or OD, with respect to
the common application.

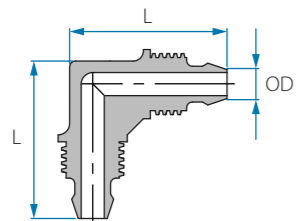


Union Elbow Barb Block Connector

Cat. No.	OD mm	L mm	Colour
22056546001	6	274	○ White
22056548001	8	274	
22056552001	12	405	

Cat. No.	OD inch	L mm	Colour
22256504001	¼"	274	● White & Navy Blue
22256505001	⅝"	274	
22256508001	½"	405	


Note: Packing 25 unit
* Nuts material is Reinforced PP

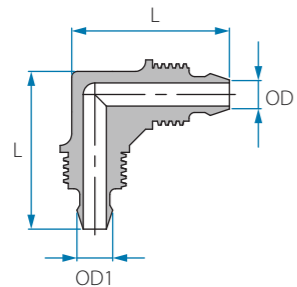

Reducing Elbow Barb Block Connector

Cat. No.	OD mm	OD1 mm	L mm	Colour
22055748461	8	6	273	○ White

Note: Packing 25 unit
* Nuts material is Reinforced PP

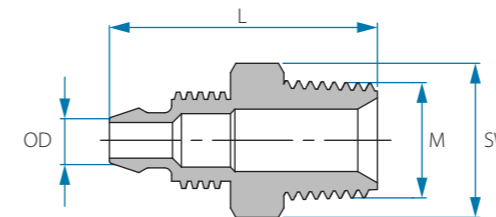

Male BSPT Barb Block Connector

Cat. No.	OD mm	M (BSPT)	L mm	SW	Colour
22056846021	6	⅛"	275	13	○ White
22056846041	6	¼"	29.7	15	
22056846061	6	⅜"	32.5	17	
22056846081	6	½"	35.5	22	
22056846121	6	¾"	35.5	27	
22056848021	8	⅛"	27.6	13	
22056848041	8	¼"	29.5	15	
22056848061	8	⅜"	31.4	18	
22056848081	8	½"	36.1	22	
22056848121	8	¾"	26.1	27	
22056850041	10	¼"	35.8	17	
22056850061	10	⅜"	35.8	17	
22056850081	10	½"	38.9	22	
22056850121	10	¾"	38.9	27	
22056852041	12	¼"	37.3	17	
22056852061	12	⅜"	37.3	17	
22056852081	12	½"	40.1	22	
22056852121	12	¾"	40.1	27	

Cat. No.	OD inch	M (BSPT)	L mm	SW	Colour
22056804021	¼"	⅛"	275	13	● White & Navy Blue
22056804041	¼"	¼"	29.7	15	
22056804061	¼"	⅜"	32.5	18	
22056804081	¼"	½"	35.5	22	
22056804121	¼"	¾"	35.5	27	
22056805021	⅝"	⅛"	27.6	13	
22056805041	⅝"	¼"	29.5	15	
22056805061	⅝"	⅜"	31.4	18	
22056806041	⅜"	¼"	36.1	17	
22056806061	⅜"	⅜"	36.6	17	
22056806081	⅜"	½"	35.8	22	
22056806121	⅜"	¾"	35.8	27	
22056808041	½"	¼"	38.9	14	
22056808061	½"	⅜"	39.7	17.5	
22056808081	½"	½"	37.3	22	
22056808121	½"	¾"	40.1	27	

Note: Packing 25 unit
* Nuts material is Reinforced PP



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands