


**iQparts**  
IQ-PARTS-SHOP.COM




**SPECS &  
INFORMATION**

ULTIMATE PROTECTION

All HI-TORQUE and MULTI-TORQUE hose clips have fully rounded edges to give the best possible protection to the hose.



JCS band edges



Typical hose clip with turned edges



MULTI-TORQUE

Ideal for large diameter applications, our Multi-Torque adjustable banding hose clamps combine the strength and performance of the Hi-Torque hose clamp with the versatility convenience producing instant hose clamps to any design and diameter from a kit. Available in both 304 and 316 stainless steel.

Multi-Torque is significantly stronger than any other adjustable banding products and straightforward to use - simply cut off the required banding length from a continuous roll and engage one end into each housing of the worm drive Multi-Torque connectors provided. The band can then be applied to pipes or ducts of virtually any diameter.

Multi-Torque banding is supplied in 10m and 30m coils. Other lengths are available to special order. A maintenance kit is also available that contains one connector and 1m coil, a necessary addition to any field service engineer's toolkit.

MULTI-TORQUE TECHNICAL & MATERIAL SPECIFICATION



**RECOMMENDED SETTING TORQUE**  
15Nm (130 lb.tn)


**BAND TENSILE STRENGTH**  
1150 N/mm2 approx. (75 tons/in2)

MATERIAL SPECIFICATIONS

**STAINLESS STEEL 304**  
All parts BS304 - EN 1.4301/1.4576

**STAINLESS STEEL 316**  
All parts BS316 - EN 1.4401/1.4578

MULTI-TORQUE CONNECTORS	
Length	Box Qty
150mm	10
300mm	25
350mm	25
450mm	25

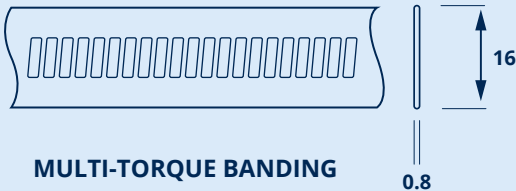

MULTI-TORQUE BANDING
Length
10m
30m





**iq**  
**parts**  
IQ-PARTS-SHOP.COM

info@iq-parts.nl  
Harsweg 34A  
2461 EZ Ter Aar  
T +31 252 624 126  
The Netherlands