



DIMLUX XTREME SERIES LED



INTRODUCING THE MOST POWERFUL AND SMART LED GROWLIGHT ON THE MARKET!
THE DIMLUX XTREME SERIES LED.



**XTREME SERIES
LED 500W**



**XTREME SERIES
LED 750W**



**XTREME SERIES
LED 1000W**



INTRODUCTION

12 Years ago, Dimlux introduced the first ever ground breaking remote controlled HPS ballast in combination with the Maxi Controller; The Dimlux Xtreme Series. Today, Dimlux introduces the smartest, most efficient and most powerful grow light on the market, the **Dimlux Xtreme Series LED!**

With this innovative LED fixture, Dimlux sets a benchmark for horticultural lighting.

With patented technology, advances in LED technology, and optimal thermal design, the **Dimlux Xtreme Series LED** will be the preferred option offering significant return on investment to cultivators. Our adjustable PhytoVegSpec® grow spectrum combines full control over light quality (spectral flexibility) and quantity (intensity and DLI) ensuring a uniform spread and even light distribution with extreme penetration into the canopy.

The **Dimlux Xtreme Series LED** produces ultra-high levels of PPF, evenly spread over a 1.2x1.2m grow area (500W) or a 1.5x1.5 m grow area (750W and 1000W), with a full grow spectrum, producing consistently high quality & high yield indoor crops.

The **Dimlux Xtreme Series LED** can be dimmed without losing efficiency. The spectrum and output power can be programmed depending on the time of day and the growing stage of the crop.

Auxiliary RGB LEDs with over 65k colors can be used as supplemental light and can be used as green work light in the dark phase. The work light can automatically be switched on by the internal radar proximity sensor.



DIMLUX


TheClimateFactory


DIMLUX

XTREME SERIES 1000W LED




Light Source	LED
Spectrum	Adjustable PhytoVegSpec® Indoor
Light Output (PPF)	3035 $\mu\text{mol/s}$
System Efficacy	2.85 $\mu\text{mol/J}$ @ 230V AC
AC Input Power	1065W @ 230V AC
AC Input Voltage	120-277V AC, 50/60Hz
Beam Angle	90° × 120°
Optics	Patented Deep Penetration Ultra High Transmittance Lens
Auxiliary Light	Patented Light Pipe Multi Color 65k
Proximity sensor	Doppler Radar
Thermal Management	Passive
Max. Ambient Temperature	40°C / 105°F
Control	By Maxi Controller or Internal Controller
Smartports (3x)	Interlink, Plant Temperature Sensor, Light Sensor
Display For Spectrum and GUI	1.54" 65k color IPS
Total Harmonic Distortion (THD)	< 10%
Lifetime L90:	> 50,000hrs
IP Rating	IP65
Certifications	CE, UL 8800, UL 1598 Wet Location, DLC
Warranty	5 Year Standard


TOP VIEW

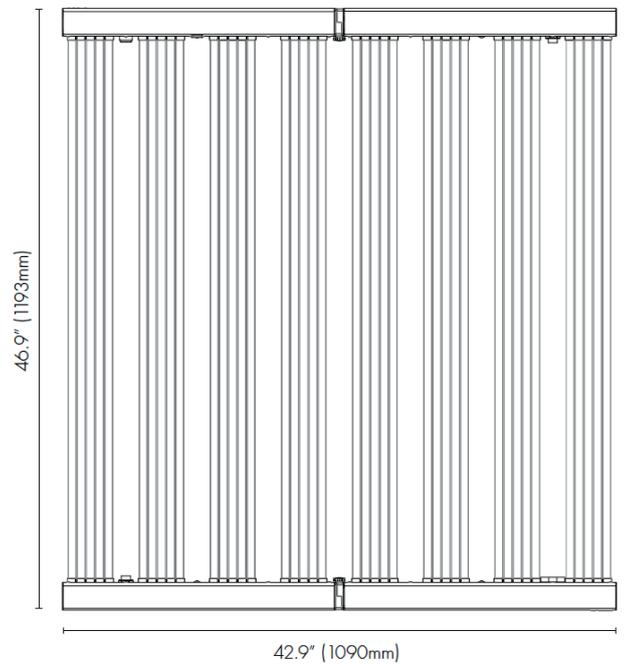

SIDE VIEW

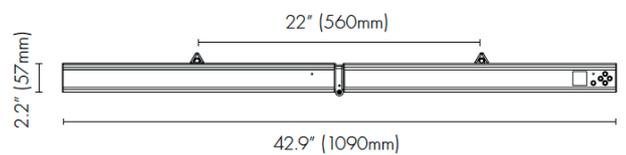

SPECTRA Adjustable PhytoVegSpec® Indoor

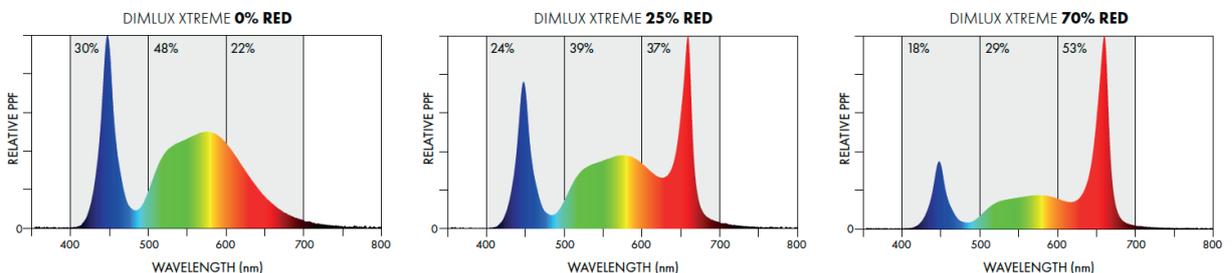


DIMLUX

XTREME SERIES 750W LED




Light Source	LED
Spectrum	Adjustable PhytoVegSpec® Indoor
Light Output (PPF)	2276 $\mu\text{mol/s}$
System Efficacy	2.85 $\mu\text{mol/J}$ @ 230V AC
AC Input Power	799W @ 230V AC
AC Input Voltage	120-277V AC, 50/60Hz
Beam Angle	90° × 120°
Optics	Patented Deep Penetration Ultra High Transmittance Lens
Auxiliary Light	Patented Light Pipe Multi Color 65k
Proximity sensor	Doppler Radar
Thermal Management	Passive
Max. Ambient Temperature	40°C / 105°F
Control	By Maxi Controller or Internal Controller
Smartports (3x)	Interlink, Plant Temperature Sensor, Light Sensor
Display For Spectrum and GUI	1.54" 65k Color IPS
Total Harmonic Distortion (THD)	< 10%
Lifetime L90	> 50,000h
IP Rating	IP65
Certifications	CE, UL 8800, UL 1598 Wet Location, DLC
Warranty	5 Year Standard


TOP VIEW

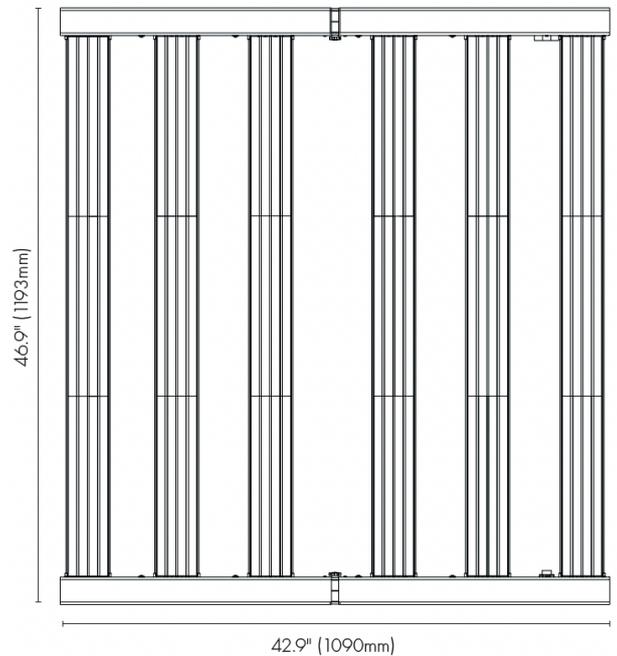

SIDE VIEW

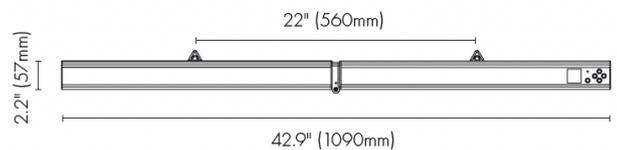

SPECTRA Adjustable PhytoVegSpec® Indoor

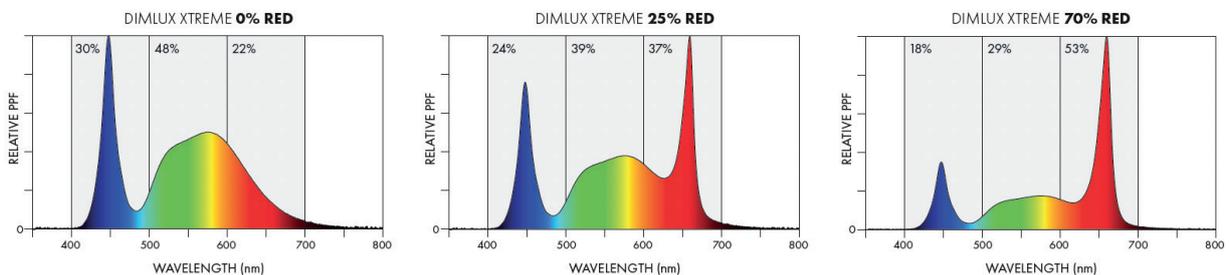


DIMLUX

XTREME SERIES 500W LED




Light Source	LED
Spectrum	Adjustable PhytoVegSpec® Indoor
Light Output (PPF)	1500 $\mu\text{mol/s}$
System Efficacy	2.85 $\mu\text{mol/J}$ @ 230V AC
AC Input Power	540W @ 230V AC
AC Input Voltage	120-277V AC, 50/60Hz
Beam Angle	90° × 120°
Optics	Patented Deep Penetration Ultra High Transmittance Lens
Auxiliary Light	Patented Light Pipe Multi Color 65k
Proximity sensor	Doppler Radar
Thermal Management	Passive
Max. Ambient Temperature	40°C / 105°F
Control	By Maxi Controller or Internal Controller
Smartports (3x)	Interlink, Plant Temperature Sensor, Light Sensor
Display For Spectrum and GUI	1.54" 65k Color IPS
Total Harmonic Distortion (THD)	< 10%
Lifetime L90	> 50,000h
IP Rating	IP65
Certifications	CE, UL 8800, UL 1598 Wet Location, DLC
Warranty	5 Year Standard


TOP VIEW

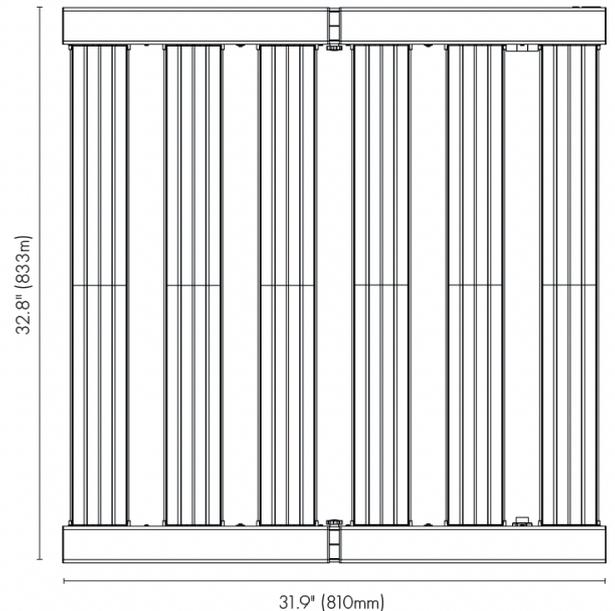

SIDE VIEW

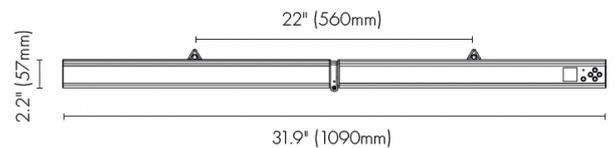

SPECTRA Adjustable PhytoVegSpec® Indoor

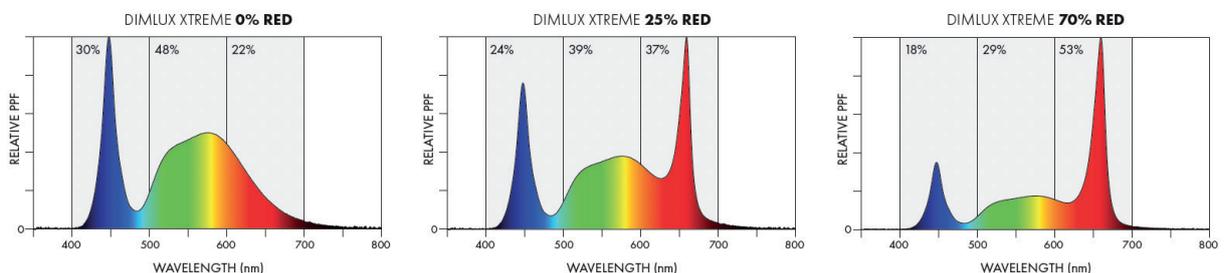



The Climate Factory SWE SLU

Calle Castellar 5
08540 Centelles, Barcelona
Spain

www.theclimatefactory.es

info@theclimatefactory.es

+34 932 20 28 85

The Climate Factory GmbH

Daimlerstraße 50a
47574 Goch
Germany

www.theclimatefactory.de

info@theclimatefactory.de

+49 2823 945 3001

The Climate Factory BV

Steenweg op Hoogstraten 72 Unit 6
2330 Merksplas
Belgium

www.theclimatefactory.be

info@theclimatefactory.be

+32 144 80 224

The logo for DIMLUX, featuring a stylized orange and red graphic above the word "DIMLUX" in a bold, black, sans-serif font.


TheClimateFactory