

CORK

01-Feb.-2018

1.0

LED 3W | 120-240VAC | 50-60Hz | PCB 3-step | incl. power supply

CE IP20    0,3m  36° 

white texture	210163W
black texture	210163B


LIGHT COLOUR

2200K >80CRI 120lm	1
2700K >80CRI 180lm	2


OPTIONAL

bottle 1 75/174 glass	90019013
bottle 2 87/323 glass	90019014

ACCESSORIES

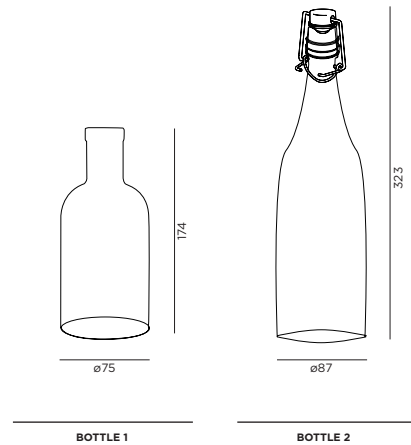


baldachin dimensions




Alternatively, every bottle can be used with precaution of:


- Max. 1kg weight
- Inner collar dimension from bottle 16,50 - 19,50mm

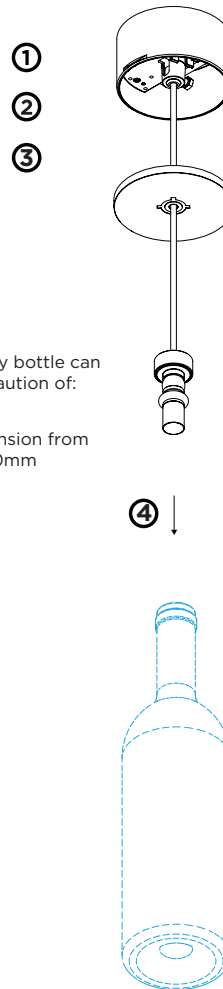

DIMENSIONS



MOUNTING INSTRUCTION

- ① Remove the cover of baldachin, and fix the baldachin to the ceiling with screws
- ② **POWER CONNECTION**
Connect the power supply
Interior: STANDARD version

- ③ Close the cover of baldachin.
(You have to turn the cover counterclockwise a quarter in order to loosen it from the baldachin and mounting back on is by turning clockwise.)
- ④ Insert the inner module into the bottle*
- ⑤ Hold bottom part (LED side) and turn top part by hand left or right to adjust the diameter
- ⑥ Put LED module in the bottle
Ensure that there is already some friction
- ⑦ Turn top part further until the bottle is tightly attached



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

**INSTALLATION
INSTRUCTIONS**