

GETTON

02-11-2015

1.0

LED 8W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim

CE \oplus IP65 \square 960° C \downarrow 0,3m \oplus \square

3000K | >80CRI | 665lm | opal glass
 dark grey texture

717574D4

ALWAYS USE

base 400 910052D0
 base 600 910054D0
 base 800 910058D0

OPTIONAL

groundspike 90013101

2.0

LED 8W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim

CE \oplus IP65 \square 960° C \downarrow 0,3m \oplus \square

3000K | >80CRI | 665lm | clear glass
 dark grey texture

717674D4


ALWAYS USE

base 400 910052D0
 base 600 910054D0
 base 800 910058D0



OPTIONAL

groundspike 90013101


base plate dimensions



OPTIONAL, (ORDER SEPARATELY)
 groundspike dimensions

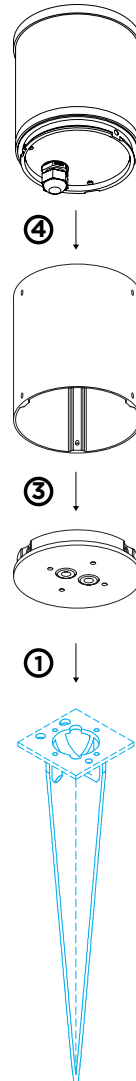

DIMENSIONS




MOUNTING INSTRUCTION

- 1 Attach the base plate to the ground with screws
 OPTIONAL: fixate the base plate to the ground spike with screws

POWER CONNECTION

- 2 Exterior: WATERPROOF Connection



- 3 Fixate the base on the base plate
- 4 Fix the GETTON head on the base



WEVER & DUCRÉ
 LIGHTING

www.weverducre.com

INSTALLATION
 INSTRUCTIONS