

SIRRO

03-Aug-2018

2.0 LED - ceiling surfaced

LED 2x10W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim
 CE \oplus IP20 $\left(\begin{array}{l} 0,3m \\ \text{E} \end{array} \right)$ $\left(\begin{array}{l} P \\ \Lambda 36^\circ \end{array} \right)$ $\left(\begin{array}{l} \cup 35^\circ/35^\circ \\ \curvearrowright 355^\circ \end{array} \right)$

white texture	139264W_
white texture + black	139264E_
aluminium brushed + black	139264F_
black texture	139264B_

LIGHT COLOUR

2700K >90CRI 590lm	3
3000K >90CRI 640lm	5
1800-2850K >95CRI 440lm	9

2.0 PAR16 - ceiling surfaced

PAR16 2xPAR16 max. 35W | GU10 | 100-240VAC | 50-60Hz
 CE \oplus IP20 $\left(\begin{array}{l} 0,9m \\ \text{E} \end{array} \right)$ $\left(\begin{array}{l} \cup 35^\circ/35^\circ \\ \curvearrowright 355^\circ \end{array} \right)$

white texture	139220W0
white texture + black	139220E0
aluminium brushed + black	139220F0
black texture	139220B0

OPTIONAL

for PAR16 lamps see our catalogue

2.0 LED - suspended

LED 2x10W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim
 CE \oplus IP20 $\left(\begin{array}{l} 0,3m \\ \text{E} \end{array} \right)$ $\left(\begin{array}{l} P \\ \Lambda 36^\circ \end{array} \right)$ $\left(\begin{array}{l} \cup 35^\circ/35^\circ \\ \curvearrowright 355^\circ \end{array} \right)$

white texture	139664W_
white texture + black	139664E_
aluminium brushed + black	139664F_
black texture	139664B_

LIGHT COLOUR

2700K >90CRI 590lm	3
3000K >90CRI 640lm	5
1800-2850K >95CRI 440lm	9


2.0 PAR16 - suspended

PAR16 2xPAR16 max. 35W | GU10 | 100-240VAC | 50-60Hz
 CE \oplus IP20 $\left(\begin{array}{l} 0,9m \\ \text{E} \end{array} \right)$ $\left(\begin{array}{l} \cup 35^\circ/35^\circ \\ \curvearrowright 355^\circ \end{array} \right)$

white texture	139620W0
white texture + black	139620E0
aluminium brushed + black	139620F0
black texture	139620B0


OPTIONAL

for PAR16 lamps see our catalogue

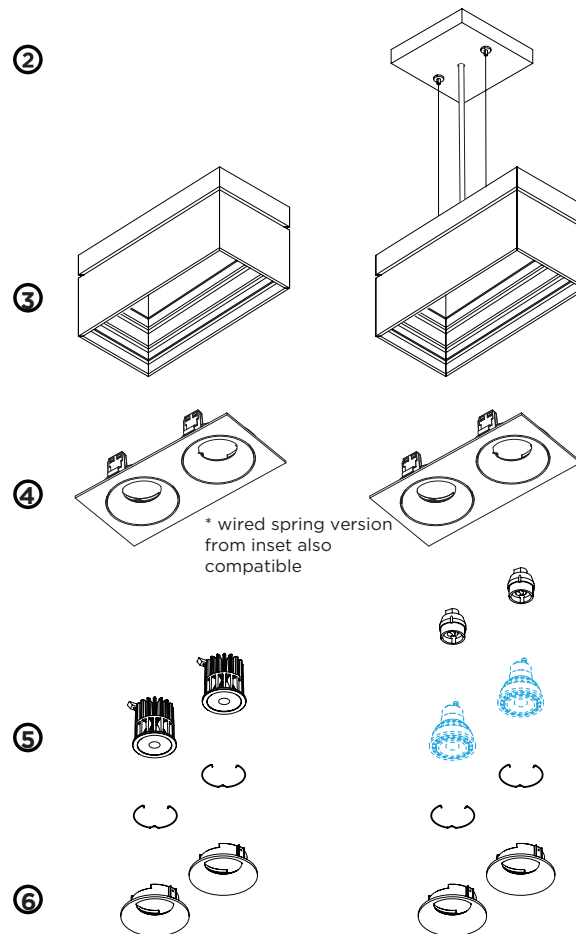

* wired spring version from inset also compatible


DIMENSIONS



MOUNTING INSTRUCTION

POWER CONNECTION

- 1 PARALLEL CONNECTION - for LED and PAR16



- 2 Mount the ceiling base on the ceiling
- 3 Attach the SIRRO to the ceiling base (in case of surfaced version)
- 4 Insert the outer part of the inset module into the SIRRO
- 5 Insert the lamps into the inner parts of the inset module
- 6 Click the inner part of the inset module into the outer part

PB19-010-470-00



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Spinnerijstraat 99/21 8500 Kortrijk

**INSTALLATION
INSTRUCTIONS**