









MSMDxxxAS-60 166 M6 cells half cut

350W-370W

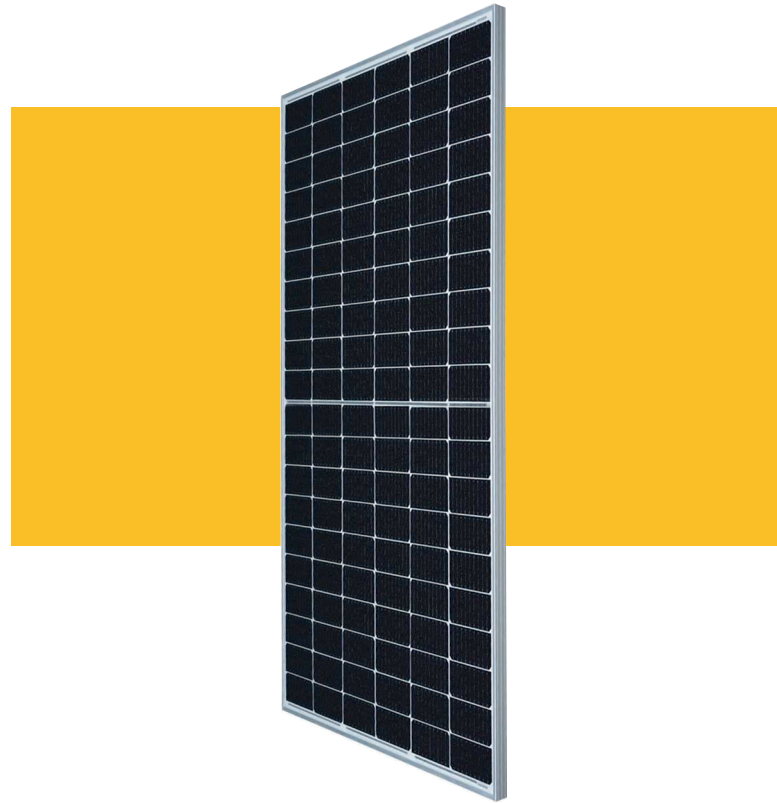

KEY FEATURES


-  **Class A fire resistant (industry standard class C)**
-  **Outstanding performance in low-light conditions**
-  **Low temperature coefficient (Pmax): -0.37 % / °C**
- +5W** 0~+5W positive tolerance - to assure high output
-  **Lower internal current, lower hot spot temperature**
-  **Cell crack risk limited in small region, enhance the module reliability**
- PID FREE** Excellent anti-PID module design, TÜV SÜD certified
-  **Certified to withstand high wind loads (3600pa) and snow loads (8000pa)**
-  **Salt mist and ammonia corrosion resistant**

PRODUCT CERTIFICATES



WARRANTY

- Our linear power guarantee
- Standard linear power guarantee

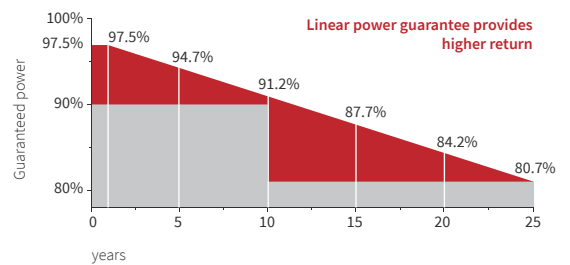

15 years Enhanced product guarantee on product and workmanship

25 years Linear power output warranty

MSMDxxxAS-60

ELECTRICAL CHARACTERISTICS

STC	350	355	360	365	370
Maximum Power at STC (Pmax)	350 W	355 W	360 W	365 W	370 W
Optimum Operating Voltage (Vmp)	33.5 V	33.7 V	33.9 V	34.1 V	34.3 V
Optimum Operating Current (Imp)	10.46 A	10.54 A	10.62 A	10.71 A	10.79 A
Open Circuit Voltage (Voc)	40.1 V	40.3 V	40.5 V	40.7 V	40.9 V
Short Circuit Current (Isc)	11.21 A	11.28 A	11.35 A	11.42 A	11.49 A
Module Efficiency	19.2%	19.5%	19.7%	20.0%	20.3%
Operating Module Temperature	-40 °C to +85 °C				
Maximum System Voltage	1500 V DC (IEC)				
Maximum Series Fuse Rating	20 A				
Power Tolerance	0/+5W				

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5; Tolerances of Pmax, Voc and Isc are all within +/- 5%.

NMOT	350	355	360	365	370
Maximum Power at NMOT (Pmax)	263.3 W	266.8 W	270.7 W	274.3 W	278.2 W
Optimum Operating Voltage (Vmp)	31.3 V	31.5 V	31.6 V	31.8 V	32 V
Optimum Operating Current (Imp)	8.42 A	8.48 A	8.56 A	8.62 A	8.69 A
Open Circuit Voltage (Voc)	38 V	38.2 V	38.4 V	38.5 V	38.7 V
Short Circuit Current (Isc)	8.89 A	8.96 A	9.04 A	9.1 A	9.17 A

NMOT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s.

TEMPERATURE CHARACTERISTICS


Nominal Module Operating Temperature (NMOT)	42±2°C
Temperature Coefficient of Pmax	-0.37 %/°C
Temperature Coefficient of Voc	-0.304 %/°C
Temperature Coefficient of Isc	0.050 %/°C

MECHANICAL CHARACTERISTICS

Solar Cell	Monocrystalline silicon 166 mm (9BB)
No. of Cells	120 (6 × 20)
Dimensions	1755 x 1038 x 40 mm
Weight	20.0 kgs
Front Glass	3.2 mm
Frame	Anodized aluminium alloy
Junction Box	IP68 rated (3 bypass diodes)
Output Cables	4.0 mm ² , symmetrical lengths (-) 1200 mm and (+) 1200 mm

PACKING CONFIGURATION

Container	20' GP	40' HC
Pieces per pallet	31	31
Pallets per container	6	26
Pieces per container	186	806

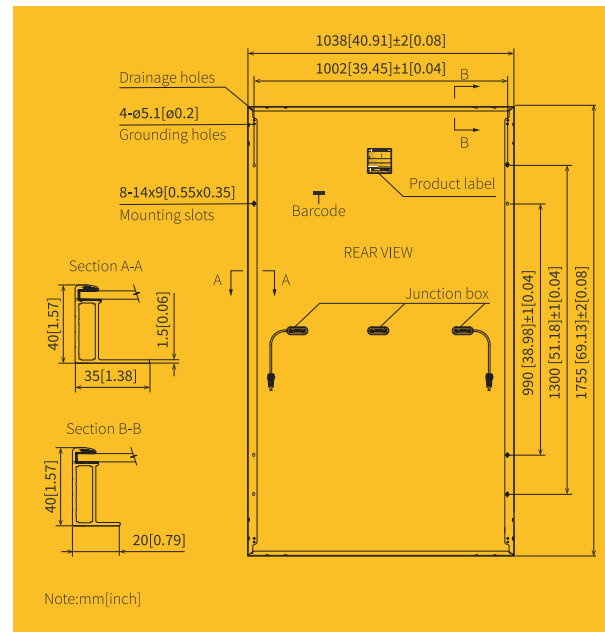

Current-Voltage & Power-Voltage Curve (370S)

