




FBK_MFD / 108 cells

385W - 400 W

Mono-Crystalline PV Module

URE Peach module uses URE state-of-the-art cell cutting technology, and advanced module manufacturing experiences.

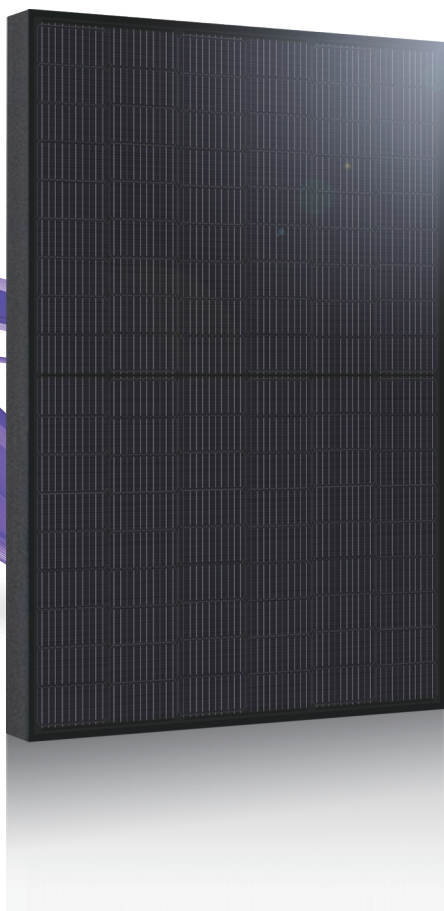


Key Features



Positive power tolerance
+0 ~ +5 watt



100% EL inline inspection
Better module reliability



Design for 1500 VDC
Reduce the system BOS effectively



PID resistance
Excellent PID resistance performance



Excellent low light performance
3.5% relative eff. Reduction at low-irradiance (200W/m²)



Electrical Data

Model - STC		FBK385MFD	FBK390MFD	FBK395MFD	FBK400MFD
Maximum Rating Power (Pmax)	[W]	385	390	395	400
Module Efficiency	[%]	19.72	19.97	20.23	20.48
Open Circuit Voltage (Voc)	[V]	36.44	36.69	36.93	37.18
Maximum Power Voltage	[V]	30.54	30.79	31.03	31.28
Short Circuit Current (Isc)	[A]	13.36	13.42	13.48	13.54
Maximum Power Current	[A]	12.61	12.67	12.73	12.79

*Standard Test Condition (STC): Cell Temperature 25 °C, Irradiance 1000 W/m², AM 1.5

*Values without tolerance are typical numbers.Measurement tolerance: ± 3%

Mechanical Data

Item	Specification
Dimensions	1722 mm (L) ¹ x 1134 mm (W) ¹ x 30 mm (D) ² / 67.80" (L) ¹ x 44.65" (W) ¹ x 1.18" (D) ²
Weight	20.2 kg / 44.53 lbs
Solar Cell	Mono/ 182mm x 91mm
Front Glass	3.2mm thickness
Cell Encapsulation	EVA (Ethylene-Viny-Acetate)
Frame	Black anodized aluminum alloy
Junction Box	IP 68
Connector	MC4 compatible
Cable	4mm ²
Package Configuration	35 pcs Per Pallet, 910 pcs per 40' HQ container

¹ : With assembly tolerance of ± 2 mm [± 0.08 "]

² : With assembly tolerance of ± 0.8 mm [± 0.03 "]

Operating Conditions

Item	Specification
Mechanical Load	5400 Pa
Maximum System Voltage	1500V
Series Fuse Rating	25 A
Operating Temperature	-40 to 85 °C


Temperature Characteristics

Item	Specification
Nominal Module Operating Temperature	45°C ± 2°C
Temperature Coefficient of Isc	0.05 % / °C
Temperature Coefficient of Voc	-0.275 % / °C
Temperature Coefficient of Pmax	-0.350 % / °C


*Nominal module operating temperature (NMOT): Air mass AM 1.5, irradiance 800W/m², temperature 20°C, windspeed 1 m/s.

*Reduction in efficiency from 1000W/m² to 200W/m² at 25°C: 3.5 ± 2%.


Engineering Drawing (mm)

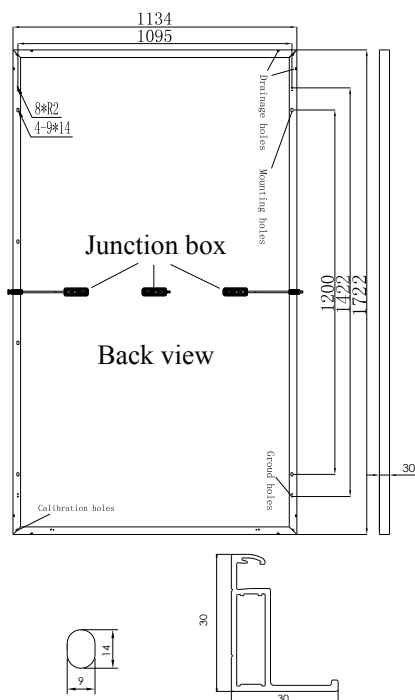

Dependence on Irradiance

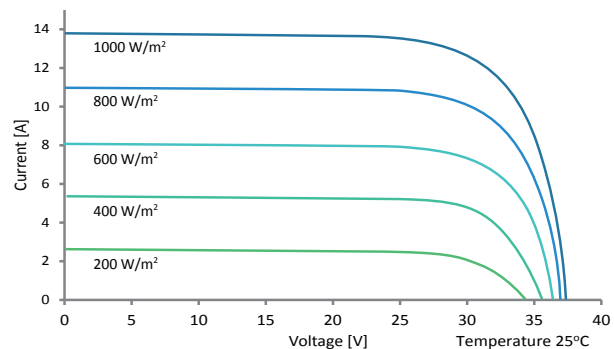

Reliability with Warranty

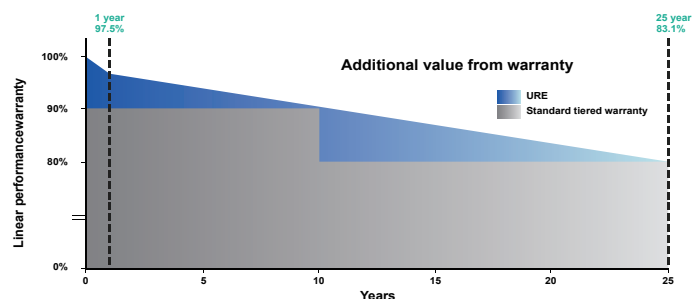

Output warranty
25
Years

Product Guarantee
12
Years

For more information, please visit us at www.urecorp.com

Taipei Office

9F, NO. 295, Sec. 2, Tiding Blvd.,
Neihu Dist., Taipei 11493, Taiwan

Tel : +886-2-2656-2000

Fax : +886-2-2656-0593

e-mail : sales@urecorp.com

Headquarters

No. 7, Li-Hsin 3rd Road, Hsinchu Science Park
Hsinchu city 30078, Taiwan

Tel : +886-3-578-0011

Fax : +886-3-578-1255