


TWINPLUS MODULE SERIES

HIGH EFFICIENCY MONO-PERC M6-10B-R

435-455W

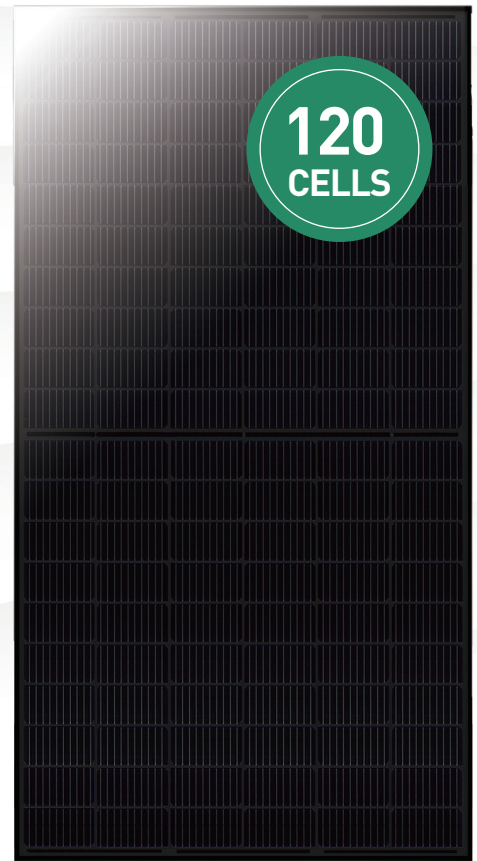

OUTSTANDING PRODUCT PERFORMANCE


- Competitive high-temperature performance with ameliorated temperature coefficient
- Minimized power loss in cell connection
- Better performance under shading effect
- Decreased nominal operating cell temperature to $45 \pm 2^{\circ}\text{C}$
- Higher power generation with multi-busbar and half-cut technology

TRUSTWORTHY QUALITY AND RELIABILITY

- Guaranteed 0~+5W positive tolerance secures reliable power output
- 5400Pa maximum snow load, 2400Pa maximum wind load
- Optimized electrical design lowers hot spot risk and operating current

PID RESISTANT

- Industry-leading cell processing technology and electrical design ensure solid PID resistance

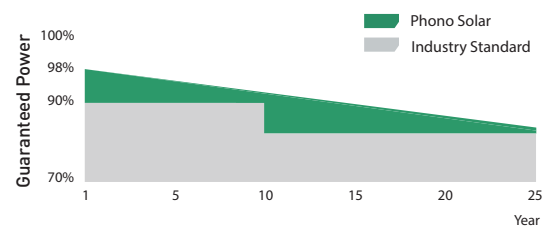

15-year Product Warranty

25-year Linear Performance Warranty

MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001:2015 / Quality management system

ISO 14001:2015 / Standards for environmental management system

ISO 45001:2018 / International standards for occupational health & safety



Bloomberg Tier1
NEW ENERGY FINANCE



ELECTRICAL TYPICAL VALUES

Model	1500V	PS435M6H-20/UH		PS440M6H-20/UH		PS445M6H-20/UH		PS450M6H-20/UH		PS455M6H-20/UH	
Testing Condition		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (P _{mpp})		435	324	440	327	445	331	450	335	455	339
Rated Current (I _{mpp})		12.88	10.41	12.97	10.48	13.06	10.55	13.15	10.63	13.24	10.70
Rated Voltage (V _{mpp})		33.78	31.10	33.93	31.24	34.08	31.37	34.23	31.51	34.37	31.64
Short Circuit Current (I _{sc})		13.42	10.84	13.52	10.92	13.62	11.00	13.72	11.09	13.82	11.17
Open Circuit Voltage (V _{oc})		40.39	38.13	40.55	38.28	40.71	38.43	40.87	38.58	41.02	38.72
Module Efficiency (%)		20.09		20.33		20.56		20.79		21.02	

STC(Standard Testing Conditions):Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/S

MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline 182mm x 91mm
Dimension (L× W × H)	Length: 1909mm (75.16 inch)
	Width: 1134mm (44.65 inch)
	Height: 30mm (1.18 inch)
Weight	25.0kg (55.12 lbs)
Front Glass	3.2mm Toughened Glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm ² (IEC), (+):1200mm,(-):1200mm
Junction Box	IP 68 Rated

TEMPERATURE RATINGS

Voltage Temperature Coefficient	-0.28%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.35%/°C
Tolerance	0~+5w
NOCT	45±2°C

ABSOLUTE MAXIMUM RATING

Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	25A
PV Module Classification	II
Fire Rating (IEC 61730)	C
Maximum System Voltage	DC1500V(EVO2)

PACKING CONFIGURATION

Container	20' GP	40' HQ
Pieces/Container	155	864

ELECTRICAL CHARACTERISTICS

