



Installation Guide iPad case 9,7"



The iPad case can be installed in the following configurations:

- WLAN: Wifi for network, power using an Apple lightning cable
- Lan: Power and Ethernet using the Apple USB Ethernet adapter, Apple Lightning to USB 3 camera adapter and an Apple lightning cable.

For cable management the cable(s) can be guided to the back or to the bottom of the case.

The following iPads are supported:

- iPad gen 5 and gen 6
- iPad air 2, with adaptor

Included in the package are the following

- case back
- case front



- 3 buttons (power, volume up and volume down)




- 12 Security screws for closing the case
- 4 m4 nuts
- 4 m4 security screws for mounting the case




Optionally the following is included

- Security bits
- iPad air 2 adaptor plate

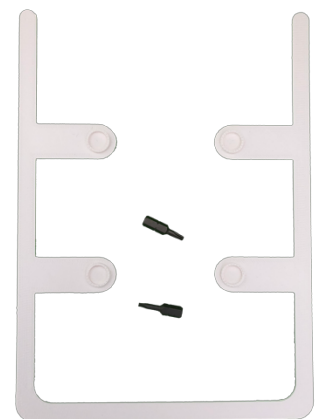


Step 1 – insert the 4 M4 nuts

Insert the 4 M4 nuts in the marked locations and press them down until they remain at their position

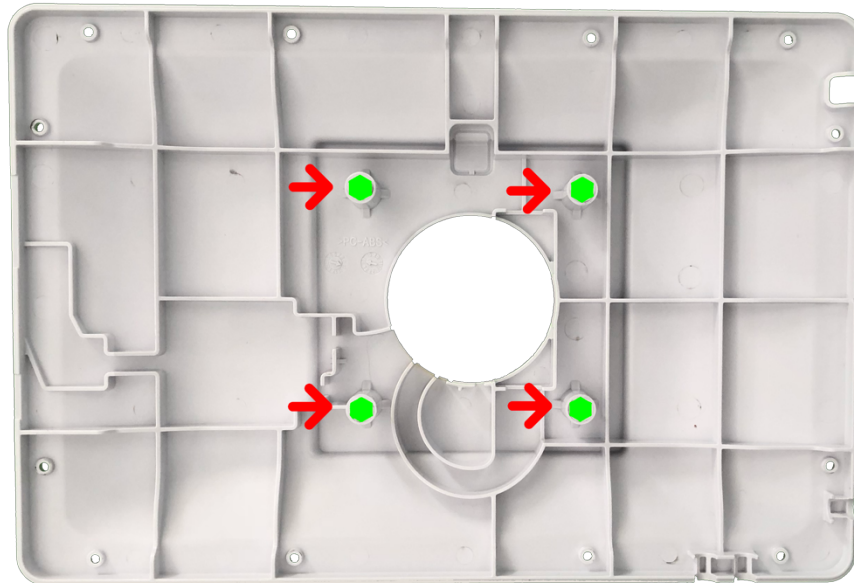

Step 2 – Optional – cut the cable hole in case cables need to be guided through the bottom of the case

Using a sharp hobby knife the bottom cable connection can be cut.

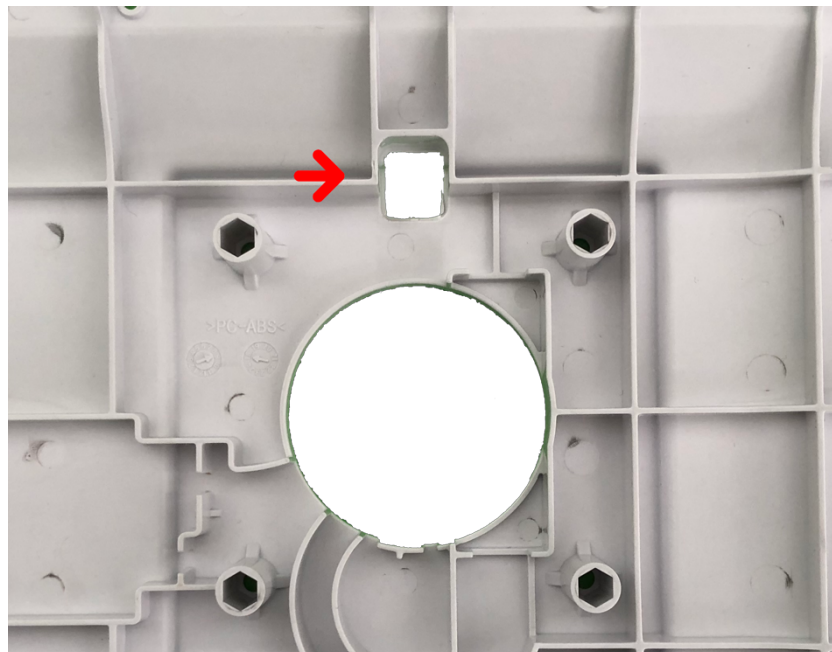


Step 3 – place the cable(s) in the case

Make sure that the cables use the integrated cable pull protection during the installation process. Left image for WLAN configuration, right image for LAN configuration



Step 4 – Optional – install the iPad Air 2 Adaptor

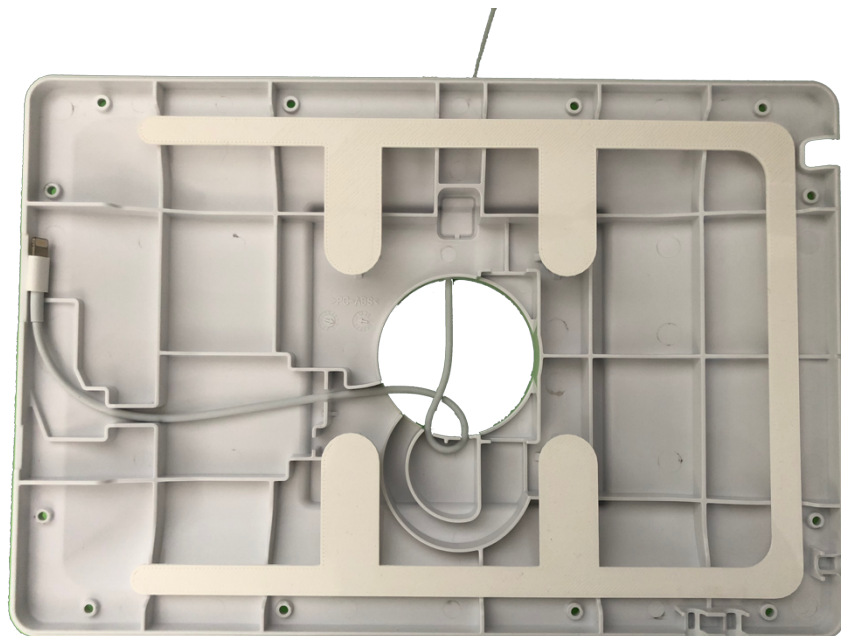

Step 5 – place the iPad and the buttons

Note: the buttons need to be inserted with the guide down.



Step 6 – Gently place the front case

Make sure the buttons work correctly and the front plate is nicely aligned with the back part of the case.



Step 7 – Rotate the case and install the screws

Hold the back and front parts firmly together and turn the case.

Make sure that the buttons remain functional during the installation.
Furthermore the screws should be tightened with limited force to prevent damage.



Step 8 – Mount the iPad at the VESA compatible mounting stand.