

SR75 DIAMOND CORE DRILL



- Nominal power: 7500 W – 400 V
- Drilling diameter: 150 – 900 mm
- Number of gears: 15
- Wet drilling machine

Extreme powerful, water-cooled SR motor with 7500 W, robust construction thanks to full metal housing, gearbox with oil bath lubrication, overload clutch and oil pump.

Technical data

		SR75	SR75S
Nominal voltage	V	400 3~	400 3~
Nominal power	W	7500	7500
Output power	W	5700	5700
Rated speed (in 15 steps)	1/min	60-360	75-460
Total length	mm	620	620
Weight	kg	19,5	19,5
Drilling diameter in concrete approx.	mm	150-900	120-800
Tool fixture		1 ¼" or M33/3	1 ¼" or M33/3
Foot mounting		8 x M8 with groove 10 x 4.3	8 x M8 with groove 10 x 4.3

Advantages

- Extreme powerful, water-cooled SR motor
- Low maintenance, as there are no carbon brushes and no rotating windings
- High performance – compact dimensions, low weight
- 15 finely tuned speeds
- Gearbox with oil bath lubrication, oil pump and high-performance overload clutch
- Splash-proof to IP55; suitable for drilling vertically upwards without further precautions
- Intuitive display with indication of drilling diameter and error output
- Soft turn – screw-on speed for easy installation of the drill bit


Application examples

- Large wet drilling in ceilings, floors, and walls.
- Penetrations for conduits and pipes.
- Perforation drilling.
- Large drilling for shafts and foundations.

Accessories

BA50	Automatic drilling feed
CP30	Laserpointer for centrally accurate spot drilling
AZ30405	Adapter sleeve M33/3 to 1 1/4"
AZ30408	Adapter sleeve 1 1/4" to M33/3
AZ30410	Extension M33/3 to M33/3, 300mm long
AZ30450C	6-hole flange with M33/3 tool fixture complete, SW46
AZ30450.2C	4-hole flange with M33/3 tool fixture complete, SW46
AZ30450.5C	6-hole flange with M33/3 tool fixture complete, SW50

Details

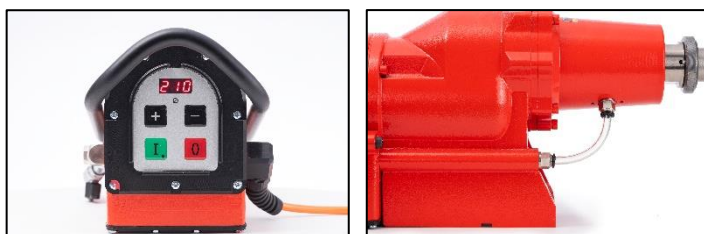

WEKA Elektrowerkzeuge KG

Auf der Höhe 20
75387 Neubulach

Kontakt

Telefon: +49 7053 96816-0
Email: weka@weka-elektrowerkzeuge.de