


OPERATING MANUAL

COSMO MICRO 25

Laser distance meter

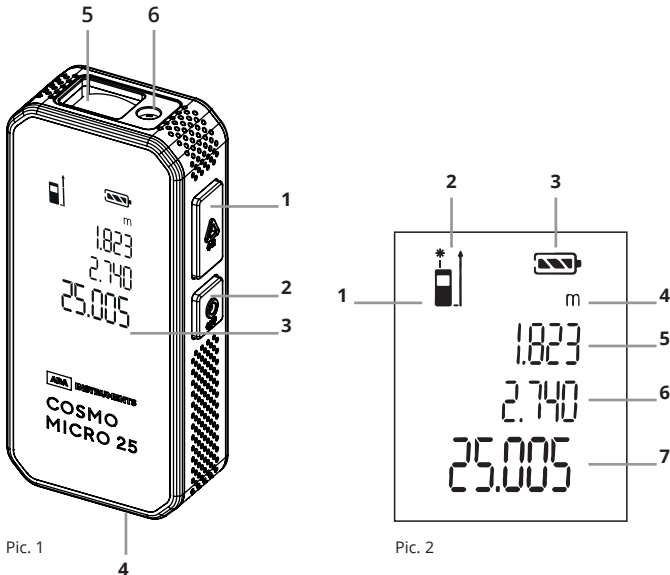

Pic. 1

Pic. 2

CHARACTERISTICS:

Working range, m	0.05~25
Accuracy, mm	±3
Minimum unit of measurement, m	1
Measurement unit	m/ft
Laser class	class 2
Laser type	620~690nm; <1mV
Automatic switch-off, sec	180
Battery/charger connector	built-in Li-ion battery / USB Type-C 5V
Operating temperature, C °	0~40
Storage temperature, C °	-20~60
Dimensions, mm	84×39×19
Weight, g	50.5

FEATURES (PIC. 1):

1. On/measuring
2. Clear/Off
3. Display
4. Power connector USB Type-C
5. Receiving lense
6. Laser window

DISPLAY (PIC. 2):

1. Reference point (the bottom edge only)
2. Laser is On
3. Battery power
4. Measurement unit (m/ft)
5. Line 2
6. Line 1
7. Main line

BATTERY CHARGE

Laser distance meter works from the built-in Li-On battery. Battery power is shown on the display (3). Blinking power indicator (3) without inner bars shows low battery level. To charge, connect the charger via USB Type-C wire to the connector on the bottom part of the tool. When fully charged, the indicator (3) does not blink, all segments are filled.

ATTENTION! Do not use a charger with an output voltage higher than 5V. Higher voltage will damage the device.

ON / OFF

- Press button (1) once: the device and laser are switched On.
- To switch Off the tool press and hold button (2) within 2 sec.

MEASUREMENT UNIT (FT/M)

Switch Off the tool. Press and hold button (1) for more than 8 sec until you hear a beep sound. Selected measurement units (ft/m) will be shown on the display. Next time when switching on the tool, if you do not plan to change measurement units, do not press button ON for more than 8 sec.

MEASUREMENTS

Press button (1) once to switch On the tool and activate laser. Continious measurement mode is activated. Now the laser distance meter makes continious measurements. Press the button once again to make measurements. A beep will sound. The result of the measurement will be shown in the main stroke. At the next measurement, the result will be displayed in the main stroke, and the previous result will move to stroke 1. To erase the result, press button (2).

OPERATION WITH MOBILE APP

Measured distances can be transferred to a mobile device. To get started, install the ADA PHOTO PLAN software by scanning the QR code on the package, or search online app stores. In the application, you can take photos of measured objects or drawing. On the lines indicating the dimensions, you can apply the values obtained from the device.

CALIBRATION ADJUSTMENT

Measurement accuracy can be calibrated by the user. Calibration step is 1 mm. Make a control measurement of the distance. Calculate the correction to be entered into the memory of the tool using the formula (in mm):

True value - received value = correction.
 (e.g.: 200 mm - 202 mm = -2 mm).

SAFETY INSTRUCTIONS

Prohibited:

- Use a charger with an output voltage higher than 5V to charge the battery of the tool;
- Use the tool outside of the instructions and use beyond the permitted operations;
- Use the device in an explosive environment (gas station, gas equipment, chemical production, etc.);
- Disabling the tool and removing warning and indicative labels from the tool;
- Opening the tool with tools (screwdrivers, etc.), changing the design of the tool or modifying it;
- Intentional blinding of third parties by the laser, direct aiming of the device at the sun;

WARRANTY

This product is warranted by the manufacturer to the original purchaser to be free from defects in material and workmanship under normal use for a period of two (2) years from the date of purchase. During the warranty period, and upon proof of purchase, the product will be repaired or replaced (with the same or similar model at manufacturer's option), without charge for either parts or labour. In case of a defect please contact the dealer where you originally purchased this product. The warranty will not apply to this product if it has been mis-used, abused or altered. Without limiting the foregoing, leakage of the battery, bending or dropping the unit are presumed to be defects resulting from misuse or abuse.

PRODUCT LIFE

Product life of the tool is 3 years. The battery and the tool should never be placed in municipal waste.

EXCEPTIONS FROM RESPONSIBILITY

The user of this product is expected to follow the instructions given in operators' manual. Although all instruments leave our warehouse in perfect condition and adjustment the user is expected to carry out periodic checks of the product's accuracy and general performance.

The manufacturer, or its representatives, assumes no responsibility of results of a faulty or intentional usage or misuse including any direct, indirect, consequential damage, and loss of profits. The manufacturer, or its representatives, assumes no responsibility for consequential damage, and loss of profits by any disaster (earthquake, storm, flood ...), fire, accident, or an act of a third party and/or a usage in other than usual conditions.

The manufacturer, or its representatives, assumes no responsibility for any damage, and loss of profits due to a change of data, loss of data and interruption of business etc., caused by using the product or an unusable product. The manufacturer, or its representatives, assumes no responsibility for any damage, and loss of profits caused by usage other than explained in the users' manual.

The manufacturer, or its representatives, assumes no responsibility for damage caused by wrong movement or action due to connecting with other products.

WARRANTY DOESN'T EXTEND TO FOLLOWING CASES:

1. If the standard or serial product number will be changed, erased, removed or will be unreadable.
2. Periodic maintenance, repair or changing parts as a result of their normal runout.
3. All adaptations and modifications with the purpose of improvement and expansion of normal sphere of product application, mentioned in the service instruction, without tentative written agreement of the expert provider.
4. Service by anyone other than an authorized service center.
5. Damage to products or parts caused by misuse, including, without limitation, misapplication or negligence of the terms of service instruction.
6. Power supply units, chargers, accessories, wearing parts.
7. Products, damaged from mishandling, faulty adjustment, maintenance with low-quality and non-standard materials, presence of any liquids and foreign objects inside the product.
8. Acts of God and/or actions of third persons.
9. In case of unwarranted repair till the end of warranty period because of damages during the operation of the product, its transportation and storing, warranty doesn't resume.

WARRANTY CARD

Name and model of the product _____

Serial number _____ Date of sale _____

Name of commercial organization _____

Stamp of commercial organization.