
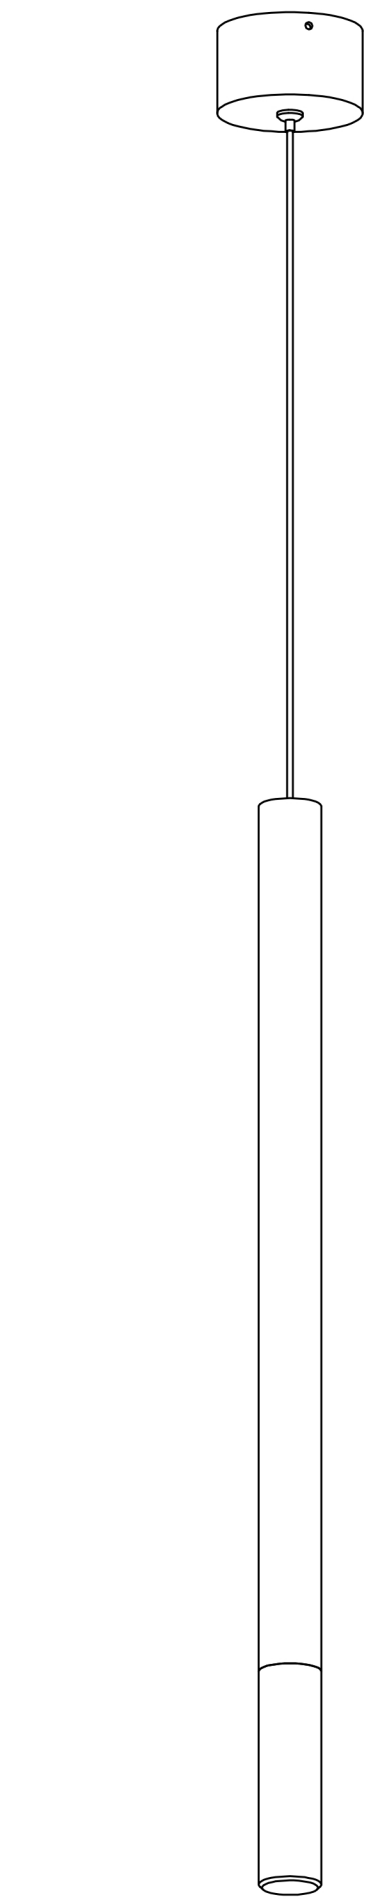


- 01.SWITCH OFF MAIN
- 02.MAKE HOLE PATTERN
- 03.INSTALL THE BASE PLATE
- 04.CONNECT LAMP TO THE MAIN
- 05.DRIVE IN THE SCREWS UNTILL TIGHT
- 06.ADJUST BEAMING
- 07.SWITCH ON THE MAIN AND LIGHT ON

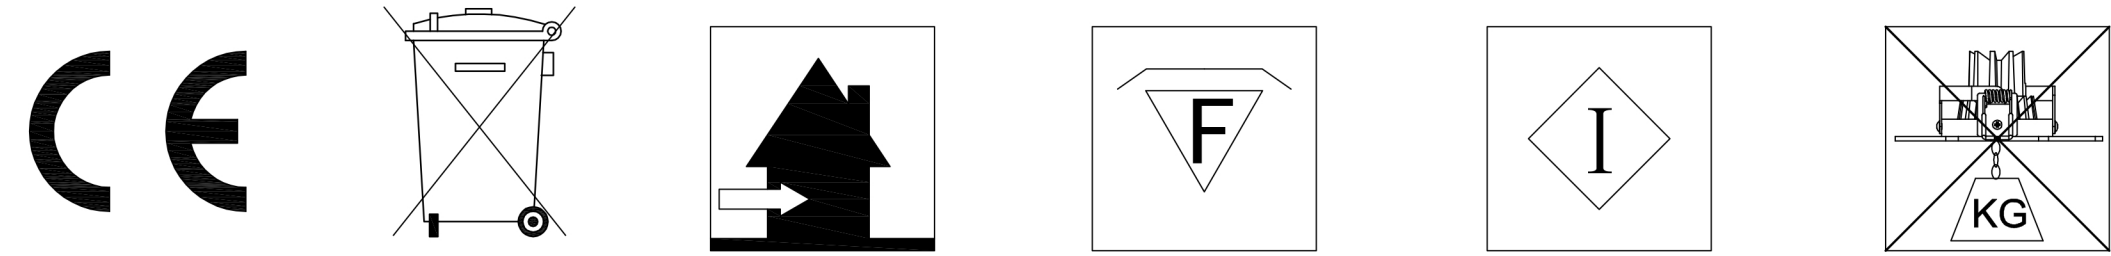

D65×H1200(mm)  
LED-1×3W

Lamp:CREE XPE LED  
Color: 6000/4000/3000K  
Color rendering: Ra80  
Input: 100V-240V AC  
Current: Constant 700mA  
Frequency: 50/60Hz  
Watt: 3W  
Life span: 20,000hrs  
Operating temp: -20°C-+40°C  
Indoor use only  
IP20  
Dimmable: NO

Cautions: a.Installed by qualified electrician  
b.Use only power-supply supplied  
by manufacturer for products guarantee